



FEDERAL DEMOCRATIC REPUBLIC OF ETHIOPIA  
MINISTRY OF WATER AND ENERGY

# LOT – 2: CONSULTANCY SERVICES FOR HYDROGEOLOGICAL MAPPING USING REMOTE SENSING, GIS, & GEOPHYSICAL SURVEYING

## ANNEX-IV: DEVELOPING GROUNDWATER POTENTIAL MAP OF WUCHALE WEREDA (FINAL)

January 2022  
ADDIS ABABA



**Ethiopian Construction Design and Supervision Works Corporation**  
**Water and Energy Design and Supervision Works Sector**

P.O.Box 2561, Addis Ababa, Ethiopia  
Tel: (+ 251)-11- 661-01-01, (+ 251)-11- 661-65-22  
Fax :(+251) -11-661-53-71  
E-mail: info@ecdswc.com  
Website www.ecdswc.com.  
Former Imperial Hotel Avenue,  
Addis Ababa,

## LOT- 2: HYDROGEOLOGICAL MAPPING USING REMOTE SENSING, GIS, & GEOPHYSICAL SURVEYING

### ANNEX-IV: DEVELOPING GROUNDWATER POTENTIAL MAP OF WUCHALE WEREDA (FINAL)

January 2021

#### Issues and Revision Records

Rev	Date	Originator (s)	Checked by	Approved by	Document Description
	January 2022	Ashebir G. Abenezer M. Seife N. Simegnew T Desta Yoseph Taddese A. Iyasu Ch. Fikirte Abebe Yelekal Yetayew	Ewnetu B.	Ephrem T.	Final Report

This document has been prepared for the titled project or named part thereof and should not be relied upon or used for any other project without an independent check being carried out as to its suitability and prior written authority Ministry of Water and Energy once the document gets final acceptance by the client.. WEDSWC accepts no responsibility or liability for the consequence of this document being used for a purpose other than the purposes for which it was commissioned. Any person using or relying on the document for such other purpose agrees, and will by such use or reliance be taken to confirm his agreement to indemnify WEDSWC for all loss or damage resulting there from. WEDSWC accepts no responsibility or liability for this document to any party other than the person by whom it was commissioned.

**CONSULTANCY SERVICES FOR HYDROGEOLOGICAL MAPPING USING  
REMOTE SENSING, GIS, & GEOPHYSICAL SURVEYING**

**PHASE II– DEVELOPING GROUNDWATER POTENTIAL MAP**

**ANNEX-IV: DEVELOPING GROUNDWATER POTENTIAL MAP OF WUCHALE  
WEREDA**

**FINAL REPORT**

	<b>STRUCTURE OF THE REPORT</b>
PHASE - I	INCEPTION REPORT
PHASE - II	DEVELOPING GROUNDWATER POTENTIAL MAP
Annex I	BURE MODAYITU WEREDA GROUNDWATER POTENTIAL MAP
Annex II	ARGOBA LIYU WEREDA GROUNDWATER POTENTIAL MAP
Annex III	DULECHA WEREDA GROUNDWATER POTENTIAL MAP
Annex IV	WUCHALE WEREDA GROUNDWATER POTENTIAL MAP
Annex V	GIRAR JARSO WEREDA GROUNDWATER POTENTIAL MAP
Annex VI	KUYU WEREDA GROUNDWATER POTENTIAL MAP
Annex VII	DERA WEREDA GROUNDWATER POTENTIAL MAP
Annex VIII	ENEBSIE SAR MIDIR WEREDA GROUNDWATER POTENTIAL MAP
Annex IX	SAYINIT WEREDA GROUNDWATER POTENTIAL MAP
Annex X	MEKET WEREDA GROUNDWATER POTENTIAL MAP
Annex XI	BUGNA WEREDA GROUNDWATER POTENTIAL MAP
Annex XII	EBINAT WEREDA GROUNDWATER POTENTIAL MAP
Annex XIII	MISRAK BELESA WEREDA GROUNDWATER POTENTIAL MAP
Annex XIV	TSELEMET WEREDA GROUNDWATER POTENTIAL MAP
PHASE - III	DETAILED SITE SPECIFIC HYDROGEOLOGICAL AND GEOPHYSICAL INVESTIGATION

## **Executive Summary**

The current study aimed at delineating groundwater potential zones of Wuchale wereda by using integrated remote sensing and GIS-based multi-criteria evaluation to identify promising areas for groundwater exploration. The scarcity of water is a major menace in Wuchale wereda for satisfying human needs.

In the study, RS ( Remote Sensing ) and GIS (geographic information system) were utilized to generate five thematic layers, Hydrogeological units, Groundwater recharge, Lineament density, Lineament proximity, and TWI as factors influencing the groundwater potential. All the thematic layers were then assigned weights according to their relative importance in groundwater occurrence and corresponding normalized weights were obtained based on Saaty's Analytical Hierarchy Process (AHP). Based on the rank assigned by a conceptual understanding of the specific weredas and weights aggregating the thematic maps is done using a weighted overlay method to obtain a groundwater potential (GWP) map. The GWP map is verified by overlay analysis with observed borehole yield data. Single –Parameter sensitivity analyses are used to examine or to compute effective weights.

The spatial distribution of the Wuchale Wereda GWP zones generally matches with the conceptual understanding of the Wuchale Wereda and well data during model validation. The good agreement of GWP map validation and well data indicate litho–structural control on groundwater recharge and movement process and factors affecting groundwater recharge were carefully analyzed during the development of thematic layers. Based on the result of sensitivity analysis, the effective weights for each thematic layer show some deviation from empirical weights. The GWP map produced will be used to quickly identify the prospective GWP zones for conducting site-specific investigations.

This study generally demonstrates that GIS and remote sensing techniques coupled with field data can be used for mapping GWP zones, thereby narrowing down the target areas. Then, by conducting a detailed hydrogeological and geophysical survey at phase III, one most appropriate and one optional site will be selected for drilling.



## TABLE OF CONTENTS

1. INTRODUCTION.....	1
1.1 GENERAL .....	1
1.2 LOCATION OF WUCHALE WEREDA .....	2
1.3 OBJECTIVES OF THE STUDY .....	4
1.4 SCOPE OF WORKS.....	4
1.5 GENERAL APPROACH, DELIVERABLES AND PLANNING .....	5
1.6 RISKS AND MITIGATION MEASURES.....	7
2. DATA AND METHODOLOGY OF THE STUDY .....	8
2.1 REMOTE SENSING DATA, FIELD INVENTORY, AND SECONDARY DATA .....	10
PREPARATION OF THEMATIC LAYERS .....	11
2.2.1 <i>Geological mapping method of the study area</i> .....	11
2.2.2 <i>Lineament Extraction method</i> .....	12
2.2.3 <i>Groundwater recharge estimation methods</i> .....	13
2.2.4 <i>Topographic Wetness Index (TWI) generation</i> .....	19
2.2.5 <i>Demography data of the Wuchale Wereda</i> .....	19
3. CONCEPTUAL HYDROGEOLOGICAL MODEL OF THE STUDY AREA .....	20
3.1 HYDROGEOLOGICAL CONDITION OF WUCHALE WEREDA .....	20
4. RESULT AND DISCUSSION .....	23
4.1 MULTI-CRITERIA DECISION ANALYSIS (MCDA) WEIGHT ASSIGNMENT USING AHP OF WUCHALE WEREDA 23	
4.2 RECLASSIFICATION OF THEMATIC LAYERS .....	26
4.2.1 HYDRO - LITHOLOGIC UNITS.....	26
4.2.2 GROUNDWATER RECHARGE .....	28
4.2.3 TWI THEMATIC LAYERS.....	30
4.2.4 LINEAMENT DENSITY THEMATIC LAYERS.....	32
4.2.5 LINEAMENT PROXIMITY THEMATIC LAYERS .....	34
4.3 OVERLAY ANALYSIS .....	36
4.4 SENSITIVITY ANALYSIS .....	36
4.4.1 SINGLE PARAMETER SENSITIVITY ANALYSIS OF WUCHALE WEREDA .....	36
4.5 VALIDATION USING WELL DATA.....	37
4. 6. SOCIO - ECONOMY AND WATER DEMAND OF WUCHALE WEREDA.....	40
4.6.1 WATER DEMAND OF WUCHALE WEREDA .....	40
4.7 GROUNDWATER POTENTIAL ZONE (GWPZ).....	41
5. REVISED WORK PLAN FOR THE PHASE – III.....	42
6. CONCLUSION AND RECOMMENDATION .....	43
7. REFERENCE .....	44

## LIST OF TABLES

TABLE 1: INVENTORIED AND EXISTING WATER POINTS .....	11
TABLE 2: EXISTING GEOLOGICAL MAP AND REMOTE SENSING DATA SOURCES .....	12
TABLE 3: DATASET USED FOR THE EVALUATION OF GROUNDWATER RECHARGE .....	14
TABLE 4: CONFUSION MATRIX OVER TRUE VALUES IN THE STUDY AREA.....	17
TABLE 5: POPULATION SIZE OF WUCHALE WEREDA, JULY 2021TO 2035.....	19
TABLE 6: NUMBER OF LIVESTOCK AND LIVESTOCK AND POULTRY (FOR PRIVATE HOLDINGS), JULY 2020.....	19
TABLE 7: RANDOM INDEX.....	23
TABLE 8: PAIR-WISE COMPARISON MATRIX BY USING AHP FOR WUCHALE WEREDA. ....	24
TABLE 9: ASSIGNED RANK FOR VARIOUS CLASSES OF ALL THEMATIC LAYERS OF WUCHALE WEREDA .....	25
TABLE 10: EFFECTIVE WEIGHT OF SINGLE PARAMETER SENSITIVITY ANALYSES OF WUCHALE WEREDA.....	37

## LIST OF FIGURES

FIGURE 1: LOCATION OF PROJECT AREA (LOT-2).....	3
FIGURE 2: THE PROJECT PHASES AND THE MAIN DELIVERABLES.....	5
FIGURE 3: PHASE II METHODS AND DELIVERABLES .....	9
FIGURE 4: SCHEMATIC REPRESENTATION OF MODEL USED FOR THE STUDY.....	16
FIGURE 5: CALCULATED NDVI USING QGIS .....	18
FIGURE 6 : HYDROGEOLOGICAL MAP OF WUCHALE WEREDA .....	21
FIGURE 7 : HYDROGEOLOGICAL SECTION OF WUCHALE WEREDAS .....	22
FIGURE 8: HYDRO – LITHOLOGIC UNIT OF WUCHALE WEREDA.....	27
FIGURE 9 : GROUNDWATER RECHARGE OF WUCHALE WEREDA .....	29
FIGURE 10 : TWI OF WUCHALE WEREDA.....	31
FIGURE 11: LINEAMENT DENSITY MAP OF WUCHALE WEREDA .....	33
FIGURE 12 : LINEAMENT PROXIMITY MAP OF WUCHALE WEREDA.....	35
FIGURE 13 : GROUNDWATER POTENTIAL TRUTHING OF WUCHALE WEREDA.....	39
FIGURE 14: GWP MAP WUCHALE WEREDA.....	41
FIGURE 15: REVISED WORK PROGRAM FOR PHASE III WORK ACTIVITIES .....	42

## LIST OF ANNEXES

ANNEX 1: OBSERVATION DURING GROUNDWATER TRUTHING AND VALIDATION .....	47
ANNEX 2: WATER POINT INVENTORY DATA .....	47
ANNEX 3: GEOLOGIC MAP AND CROSS SECTION OF WUCHALE WEREDA .....	49

## ABBREVIATIONS AND ACRONYMS

a.m.s.l	-	above mean sea level
AOI	-	Area of Interest
ASTER	-	Advanced Spaceborne Thermal Emission and Transmission
BGL	-	Below ground level
CSA	-	Central Statistical Agency
CTI	-	Compound Topographic Index
DD	-	Draw down
DEM	-	Digital elevation model
DFID	-	The UK department for international development fund
E.C.D.S.W.Co	-	Ethiopia Construction Design & Supervision Works Corporation
EC	-	Electrical Conductivity
EGS	-	Ethiopian Geological Survey
EMA	-	Ethiopian Mapping Agency
ENVI	-	Environment for Visualizing Images
ESA	-	European Space Agency
ESRI	-	Environmental Systems Research Institute
ETV	-	Evapotranspiration
FA	-	Flow Accumulation
FD	-	Flow <u>D</u> irection
FDRE	-	Federal Democratic Republic of Ethiopia
GEARS	-	Great East African Rift System
GIS	-	Geographic information system
GPS	-	Global positioning system
GSE	-	Geological Surveys of Ethiopia
GW	-	Groundwater
GWP	-	Groundwater potential
GWPZ	-	Groundwater Potential zone
Hr	-	Hour
IDW	-	Inverse Distance Weighted
km	-	Kilometer
LULC	-	Land use land cover
m	-	Meter
m <sup>3</sup> /s	-	cubic meters per second
MCM	-	Million Cubic Meters
MER	-	Main Ethiopian Rift
min	-	Minute
mm	-	Millimeter
MOWE	-	Ministry of Water , and Energy
NDVI	-	Normalized Difference Vegetation Index
NMA	-	National Meteorological Agency
pH	-	Hydrogen - Ion Activity
QGIS	-	Quantum Geographic Information System

RS	-	Remote sensing
SAR	-	Synthetic Aperture Radar
SCP	-	Semi-automatic Classification Plugin
SNAP	-	Sentinel Application Platform
SWL	-	Static water level
TDS	-	Total Dissolved Solids
ToR	-	Terms of References
TWI	-	Topographic Wetness Index
UTM	-	Universal Transverse Mercator
VES	-	Vertical Electrical Sounding
W.E.D.S.W.S	-	Water & Energy Design and Supervision Works Sector
WetSpass	-	Water & Energy transfer between soil, plants & atmosphere
WWDE	-	Water Well Drilling Enterprise
WWDSE	-	Water Works Design and Supervision Enterprise

# 1. INTRODUCTION

## 1.1 General

The consultancy contract agreement was signed between the then Basins Development Authority now Ministry of Water and Energy (Client) and Water & Energy Design and Supervision Works Sector In association with AFX OASIS Water Resources & Hydropower Engineering Construction P.L.C (Consultant) on May 14, 2021, for Hydrogeological Mapping by using an integrated approach of geological mapping, remote sensing, weighted GIS overlay analysis, hydrogeological mapping, and geophysical surveying in order to increase the success rate of drilling and provide resilient water sources to communities for Wuchale Wereda.

It is the initiation of the client to conduct a groundwater study to make a groundwater potential map and to identify drilling target sites for boreholes and alternatives drilling sites for Wuchae Wereda.

The current study aimed at delineating groundwater potential zones of Wuchale wereda by using integrated remote sensing and GIS-based multi-criteria evaluation to identify promising areas for groundwater exploration. The scarcity of water is a major menace in this Wereda for satisfying human needs.

In the study, RS ( Remote Sensing ) and GIS (geographic information system) were utilized to generate five thematic layers, Hydrogeological units, Groundwater recharge, Lineament density, Lineament proximity, and TWI as factors influencing the groundwater potential. All the thematic layers were then assigned weights according to their relative importance in groundwater occurrence and corresponding normalized weights were obtained based on Saaty's Analytical Hierarchy Process (AHP). Based on the rank assigned by a conceptual understanding of the specific wereda and weights aggregating the thematic maps is done using a weighted overlay method to obtain a groundwater potential (GWP) map. The GWP maps are verified by overlay analysis with observed borehole yield data. Single –Parameter sensitivity analyses are used to examine or to compute effective weights.

The Phase – II report has been prepared based upon Field inventory data, Remotes sensing data, Climatological data, and GIS weighted overlay and is presented in seven chapters.

Chapter-1: Deals with an introduction to the phase II stage report;

Chapter-2: Data and Methodology of the study

Chapter-3: Conceptual Hydrogeological model of the study area

Chapter-4: Result and discussion

Chapter-5: Revised work plan for Phase – III

Chapter-6: Conclusion and Recommendation,

Chapter-7: References

## **1.2 Location of Wuchale wereda**

Wuchale wereda is located in North Shewa zone of Oromia National Regional State. The study area is accessible by all-weather roads that connect Addis Ababa– Muke Turi town. The main asphalt road from Addis Ababa to Muke Turi town is about 84.9 kilometers. The whole of the project area is confined between the geographic coordinates of UTME 461826-515386 and UTMN 1042543-1079651 and topographically the study area is plain land (Figure 1).

In general, Wuchale wereda seems to be easily accessible from all directions by a number of asphalt, all-weather roads, dry season roads, and foot paths.

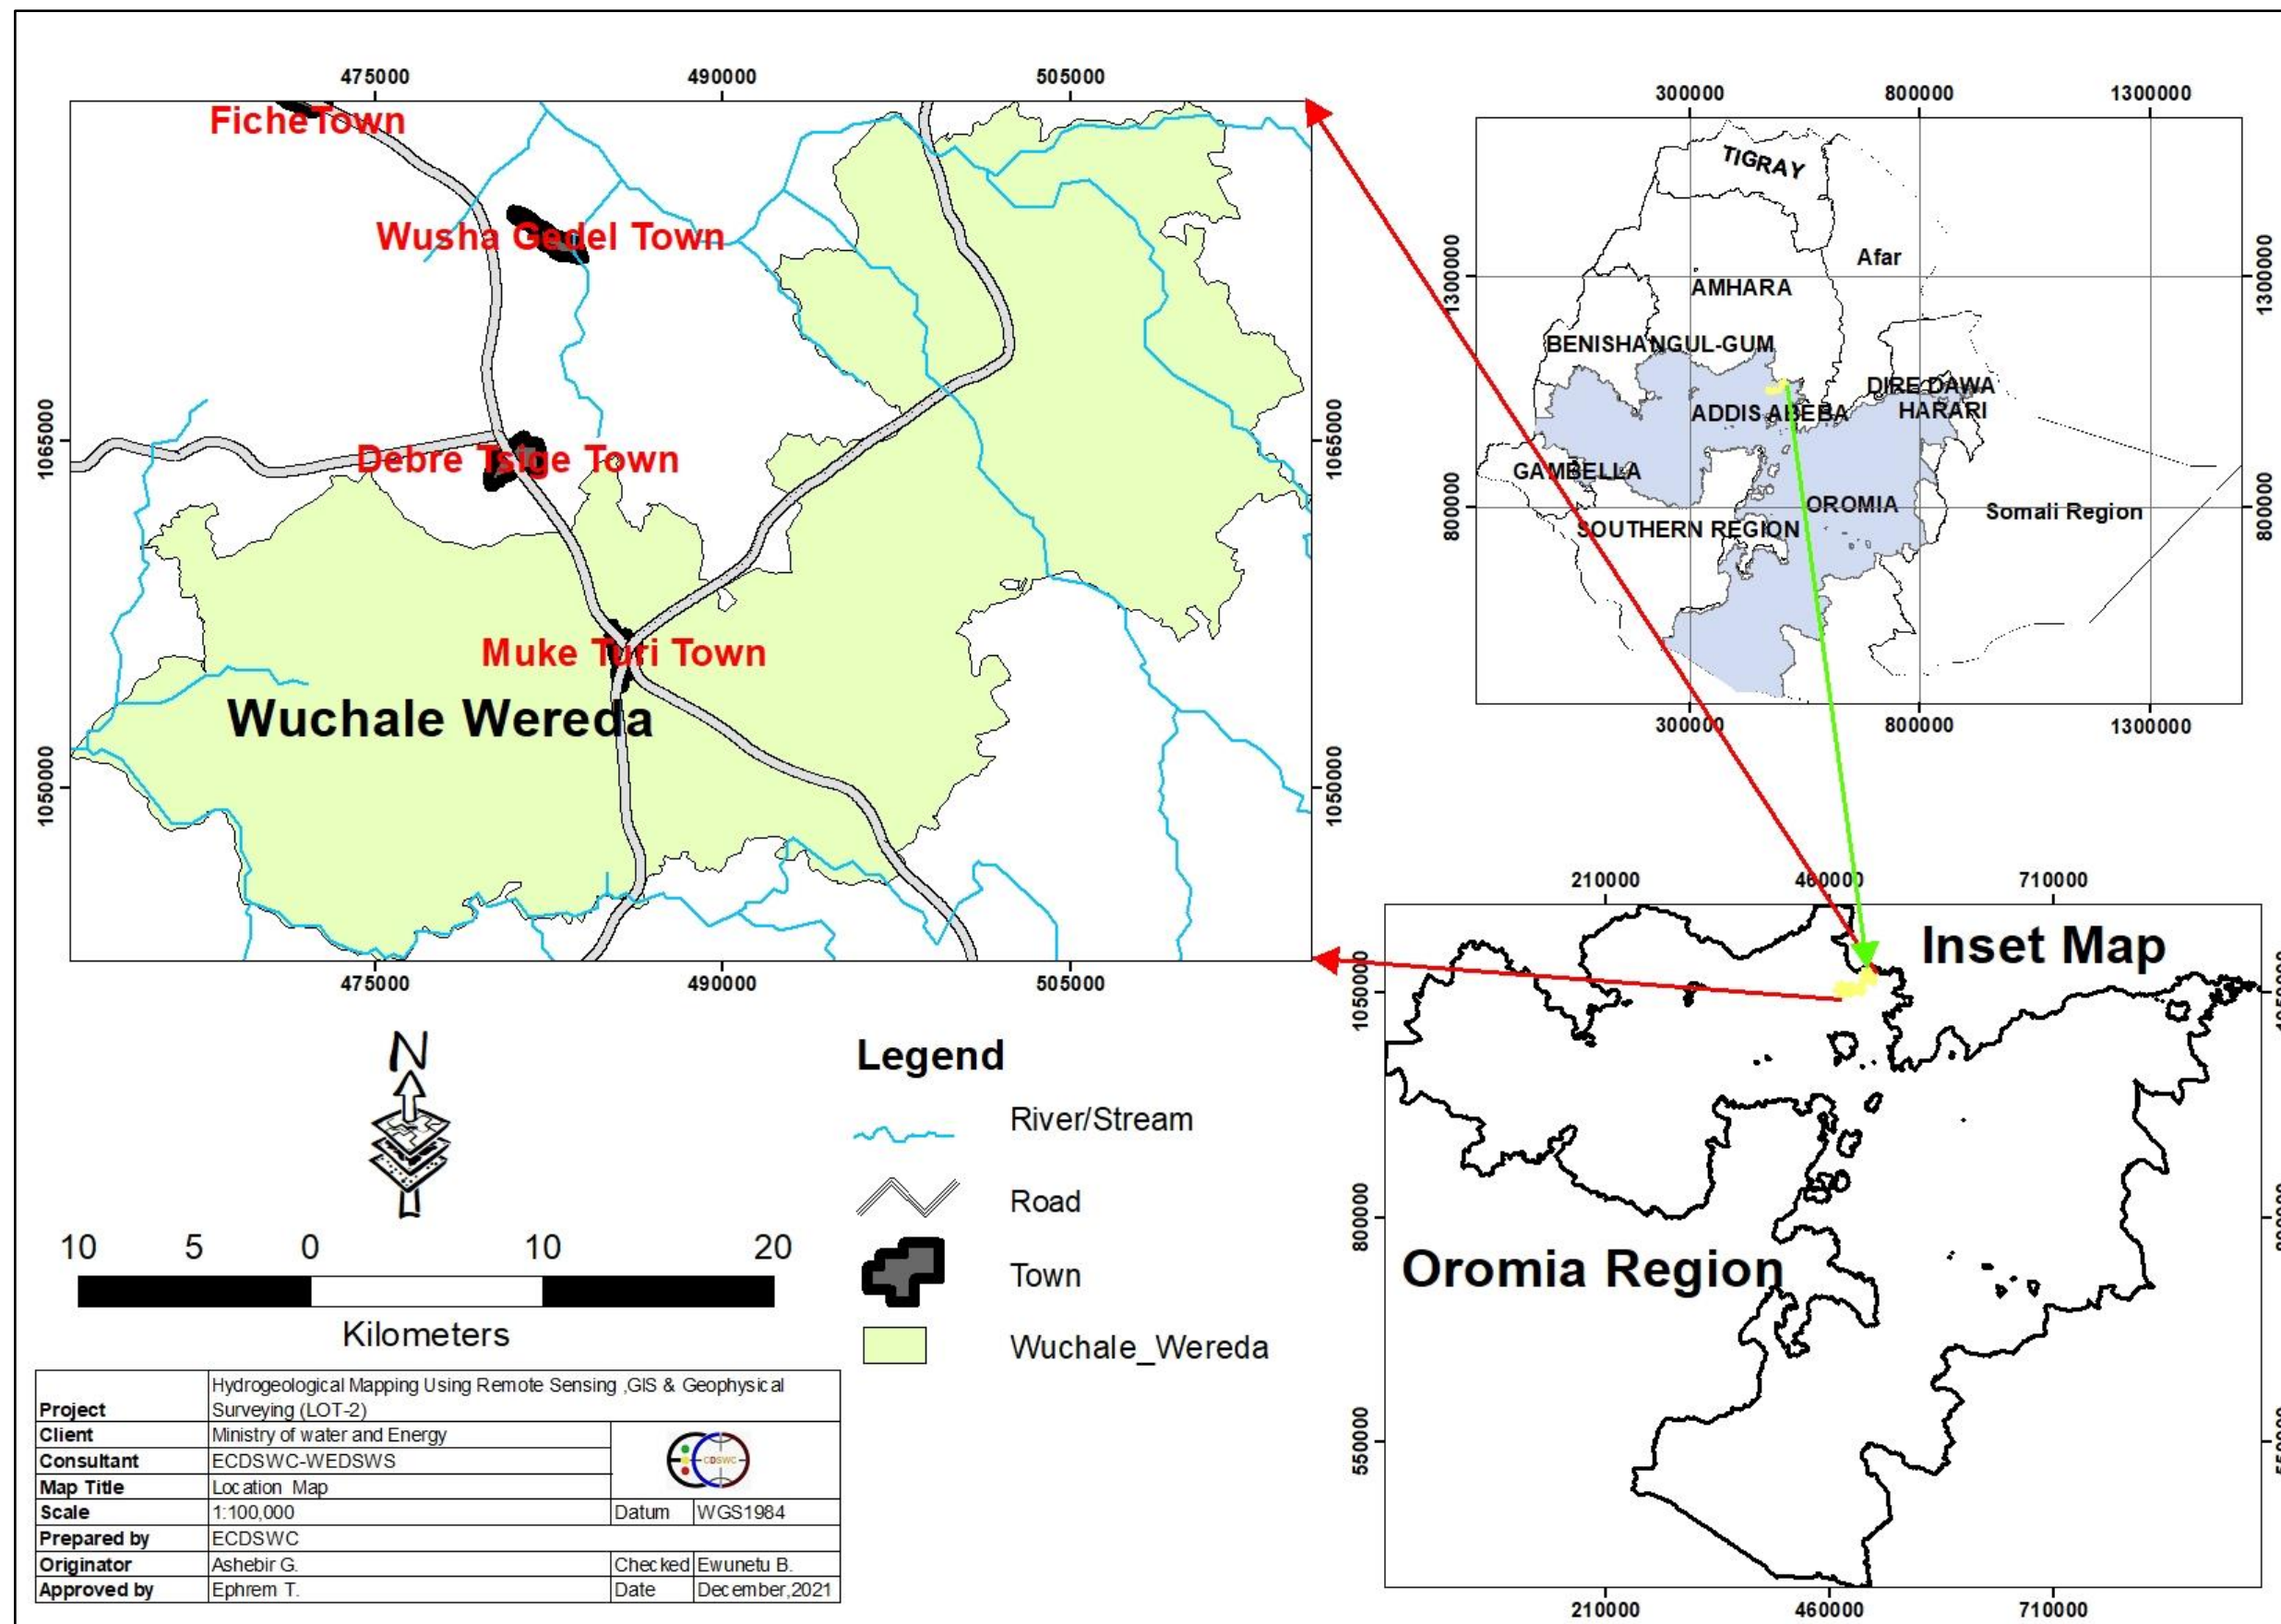


Figure 1: Location of Project area (LOT-2)

### **1.3 Objectives of the Study**

The main objective of this project is to produce operational hydrogeological maps and recommend drilling sites for Wuchale Wereda and pinpoint locations with high water demand in combination with high groundwater potential. With the compiled information, associated overlay analyses, and extra geophysical field surveys, the project team will propose one most promising drilling site for groundwater abstraction and one alternative (optional) drilling site for Wuchale Wereda. Generally, the ultimate goal of the climate-resilient WASH project in Ethiopia is to increase access to safe and sustainable water.

The following specific objectives are also associated with the project:

- Carry out National Groundwater Risk Mitigation Strategy and make recommendations.
- Create detailed groundwater potential maps for target sites
- Identify one optimal drilling site and one alternative (optional) drilling site per Wereda, using these maps and geophysical field investigation, and recommend the type of drilling methodology to be employed.
- Build the capacity of MOWE, Regional governments, and NGOs to use overlay analysis techniques for groundwater potential mapping in Ethiopia.

### **1.4 Scope of Works**

The overall assignment is to carry out the consultancy service for groundwater characterization, Groundwater mapping, and advanced mapping work with internationally known and accepted standards.

The ultimate goal of the project will be to produce operational Hydrogeological maps and to identify the most suitable site for drilling. Therefore, this project will be focused on the preparation of Operational hydrogeological maps of Wuchale Wereda and the identification of target sites for borehole drilling with enhanced drilling success rates and optional drilling sites for Wuchale Wereda.



### 1.5 General approach, Deliverables, and Planning

The project is designed in three phases to delineate Groundwater potential zones, to prepare operational Hydrogeological maps, and to select target drilling site maps. The technical route is depicted in figure 2 below

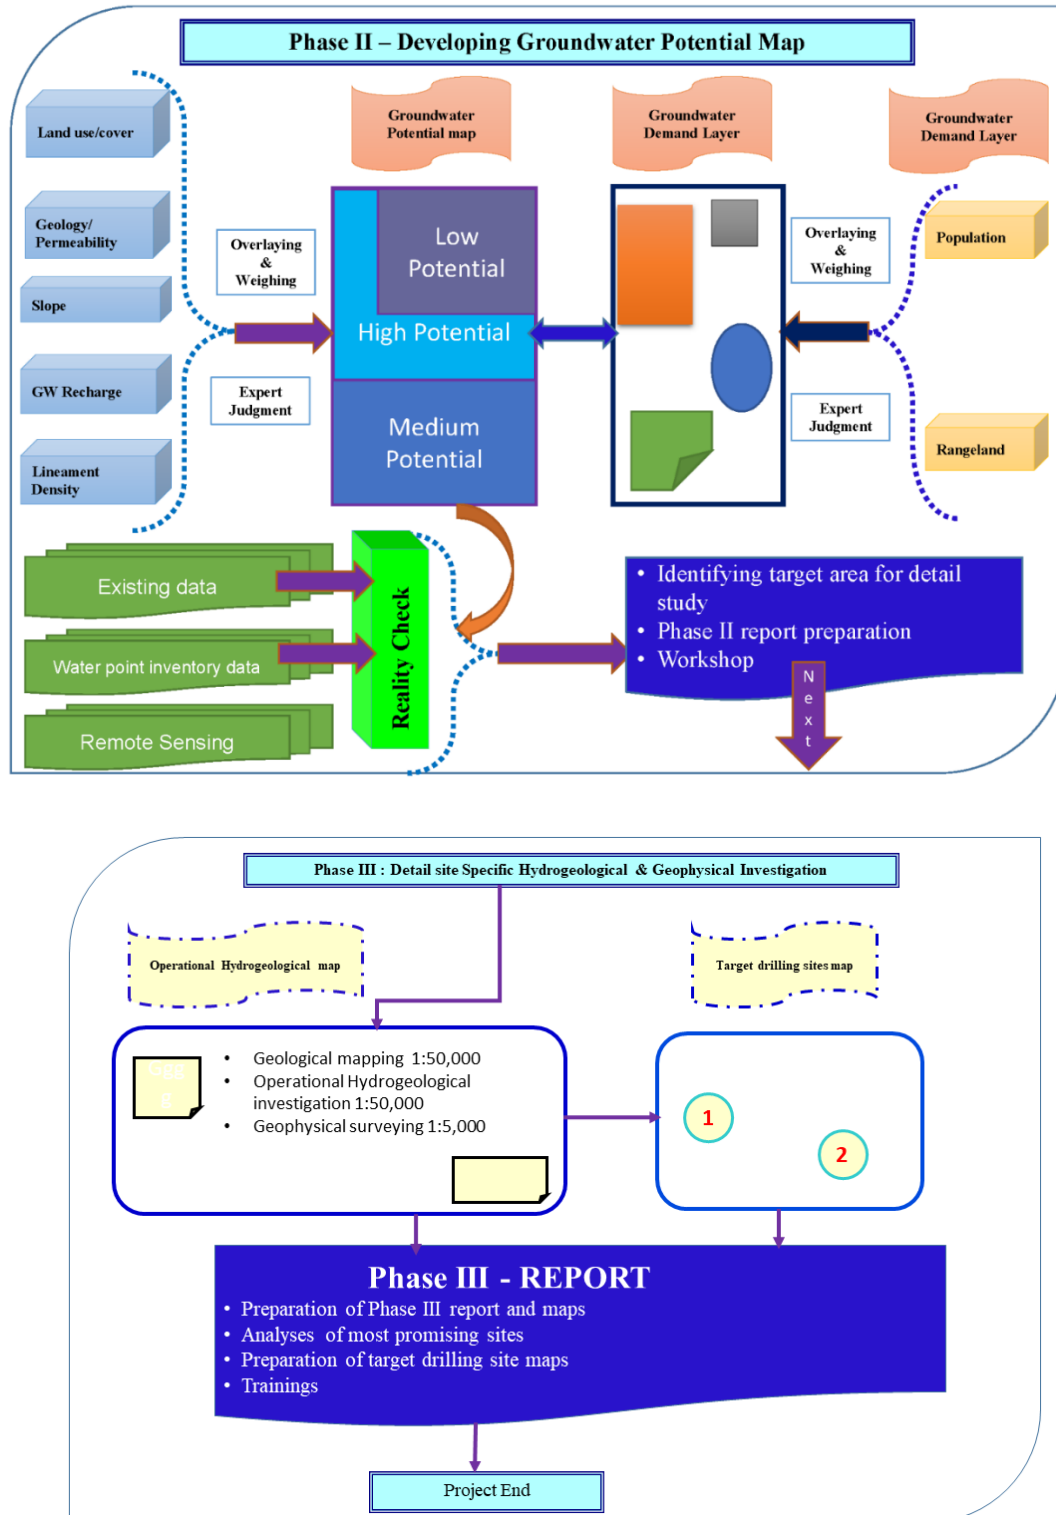


Figure 2: The project phases and the main deliverables

## **Phase II activities and deliverables of Wuchale Wereda**

The subject project was launched on the 24<sup>th</sup> of May 2021. Since validation and acceptance of Phase I Inception report the following activities listed below are completed:-

- Field inventory was carried out and basic groundwater data such as SWL, PH, and EC were measured on-site, a water sample was collected for laboratory analysis, available reports were collected from different, government, and private organizations.
- Climatological data was collected from NMA and Satellite data and detailed analysis was carried out.
- Hydrological data was collected from MOWE and detailed analysis was carried out
- Kebele with Groundwater scarcity was identified by communicating with the Wereda water office and target population
- Satellite imagery and maps were acquired and interpreted for land cover mapping, Geological mapping, and lineament preparation of the Study area
- Land cover, Soil, Depth to groundwater, Temperature, Rainfall, Wind speed, PET, Elevation maps were prepared.
- Rain days per month, modifying land cover parameter table based on the land cover map was prepared for input for Groundwater recharge estimation.
- Groundwater recharge was estimated by using the WetSpass model for the Abay basin and then the Groundwater recharge map was extracted by the Wuchale wereda boundary.
- Geological Map 1:100,000 was prepared for Wuchale wereda from existing 1:50,000 scale base maps and Satellite images.
- Lineament was extracted from SRTM DEM 30m resolution and Sentinel 1A image radar by using PCI Geomatica software initially, and then the lineament extracted was manually filtered by overlaying road, boundary, and drainage density of Study area
- Lineament density map and Lineament proximity map was prepared from lineament map
- Topographic Wetness index was generated for the Wuchale Wereda
- Hydrogeological Sections was prepared for the Wuchale Wereda
- Overlay Analysis has been carried out for the Wuchale Wereda
- Sensitivity analysis was carried out for the Wuchale Wereda

- Validation of groundwater potential was carried out for the Wuchale Wereda
- The groundwater demand layer was prepared based on projected project CSA data
- Groundwater potential map was prepared for Wuchale Wereda
- Phase II report writing and submission

### **1.6 Risks and mitigation measures**

The following anticipated constraints will have an impact on the timely execution of some of the project activities:

- Lack and incompleteness of Groundwater data and reports in the Wuchale Wereda are observed. The model is validated by using representative data collected during field inventory and existing data collected from different organizations.
- Lack of expert in weredas and Gap in the data handling, storing, and report preparation was observed.

The proposed mitigation measures are depicted as follows:-

- The data scarcity was filled by collecting existing available hydrogeological information from Wereda and the zone water bureau.
- The capacity building or Knowledge transfer for wereda Hydrogeologists was given and they participated in the groundwater inventory program together with our senior Hydrogeologists.

## **2. DATA AND METHODOLOGY OF THE STUDY**

The study methodology includes various tasks such as preparations for base maps, map updating according to field observations, digitization, and processing of image using software like WetSpas model M1.3, Arc GIS 10.8, Saaty's AHP (K.D. Version 15.09.2018), PCI Geomatica, ESA-SNAP, ERDAS Imagine and ENVI classic software's and interpretation (See figure 3). In this study, RS ( remote sensing ) and GIS (geographic information system) were utilized to generate five thematic layers of Hydrogeological units, Groundwater recharge, Lineament density, Lineament proximity, and TWI as factors influencing the groundwater potential. All the thematic layers were then assigned weights according to their relative importance in groundwater occurrence and corresponding normalized weights were obtained based on Saaty's Analytical Hierarchy Process (AHP). Based on the rank assigned by the conceptual understanding of the Wuchale wereda and weights aggregating the thematic maps is done using a weighted overlay method to obtain a groundwater potential (GWP) map. The GWP map is verified by overlay analysis with observed borehole yield data. Single – Parameter sensitivity analyses are used to compute effective weights.

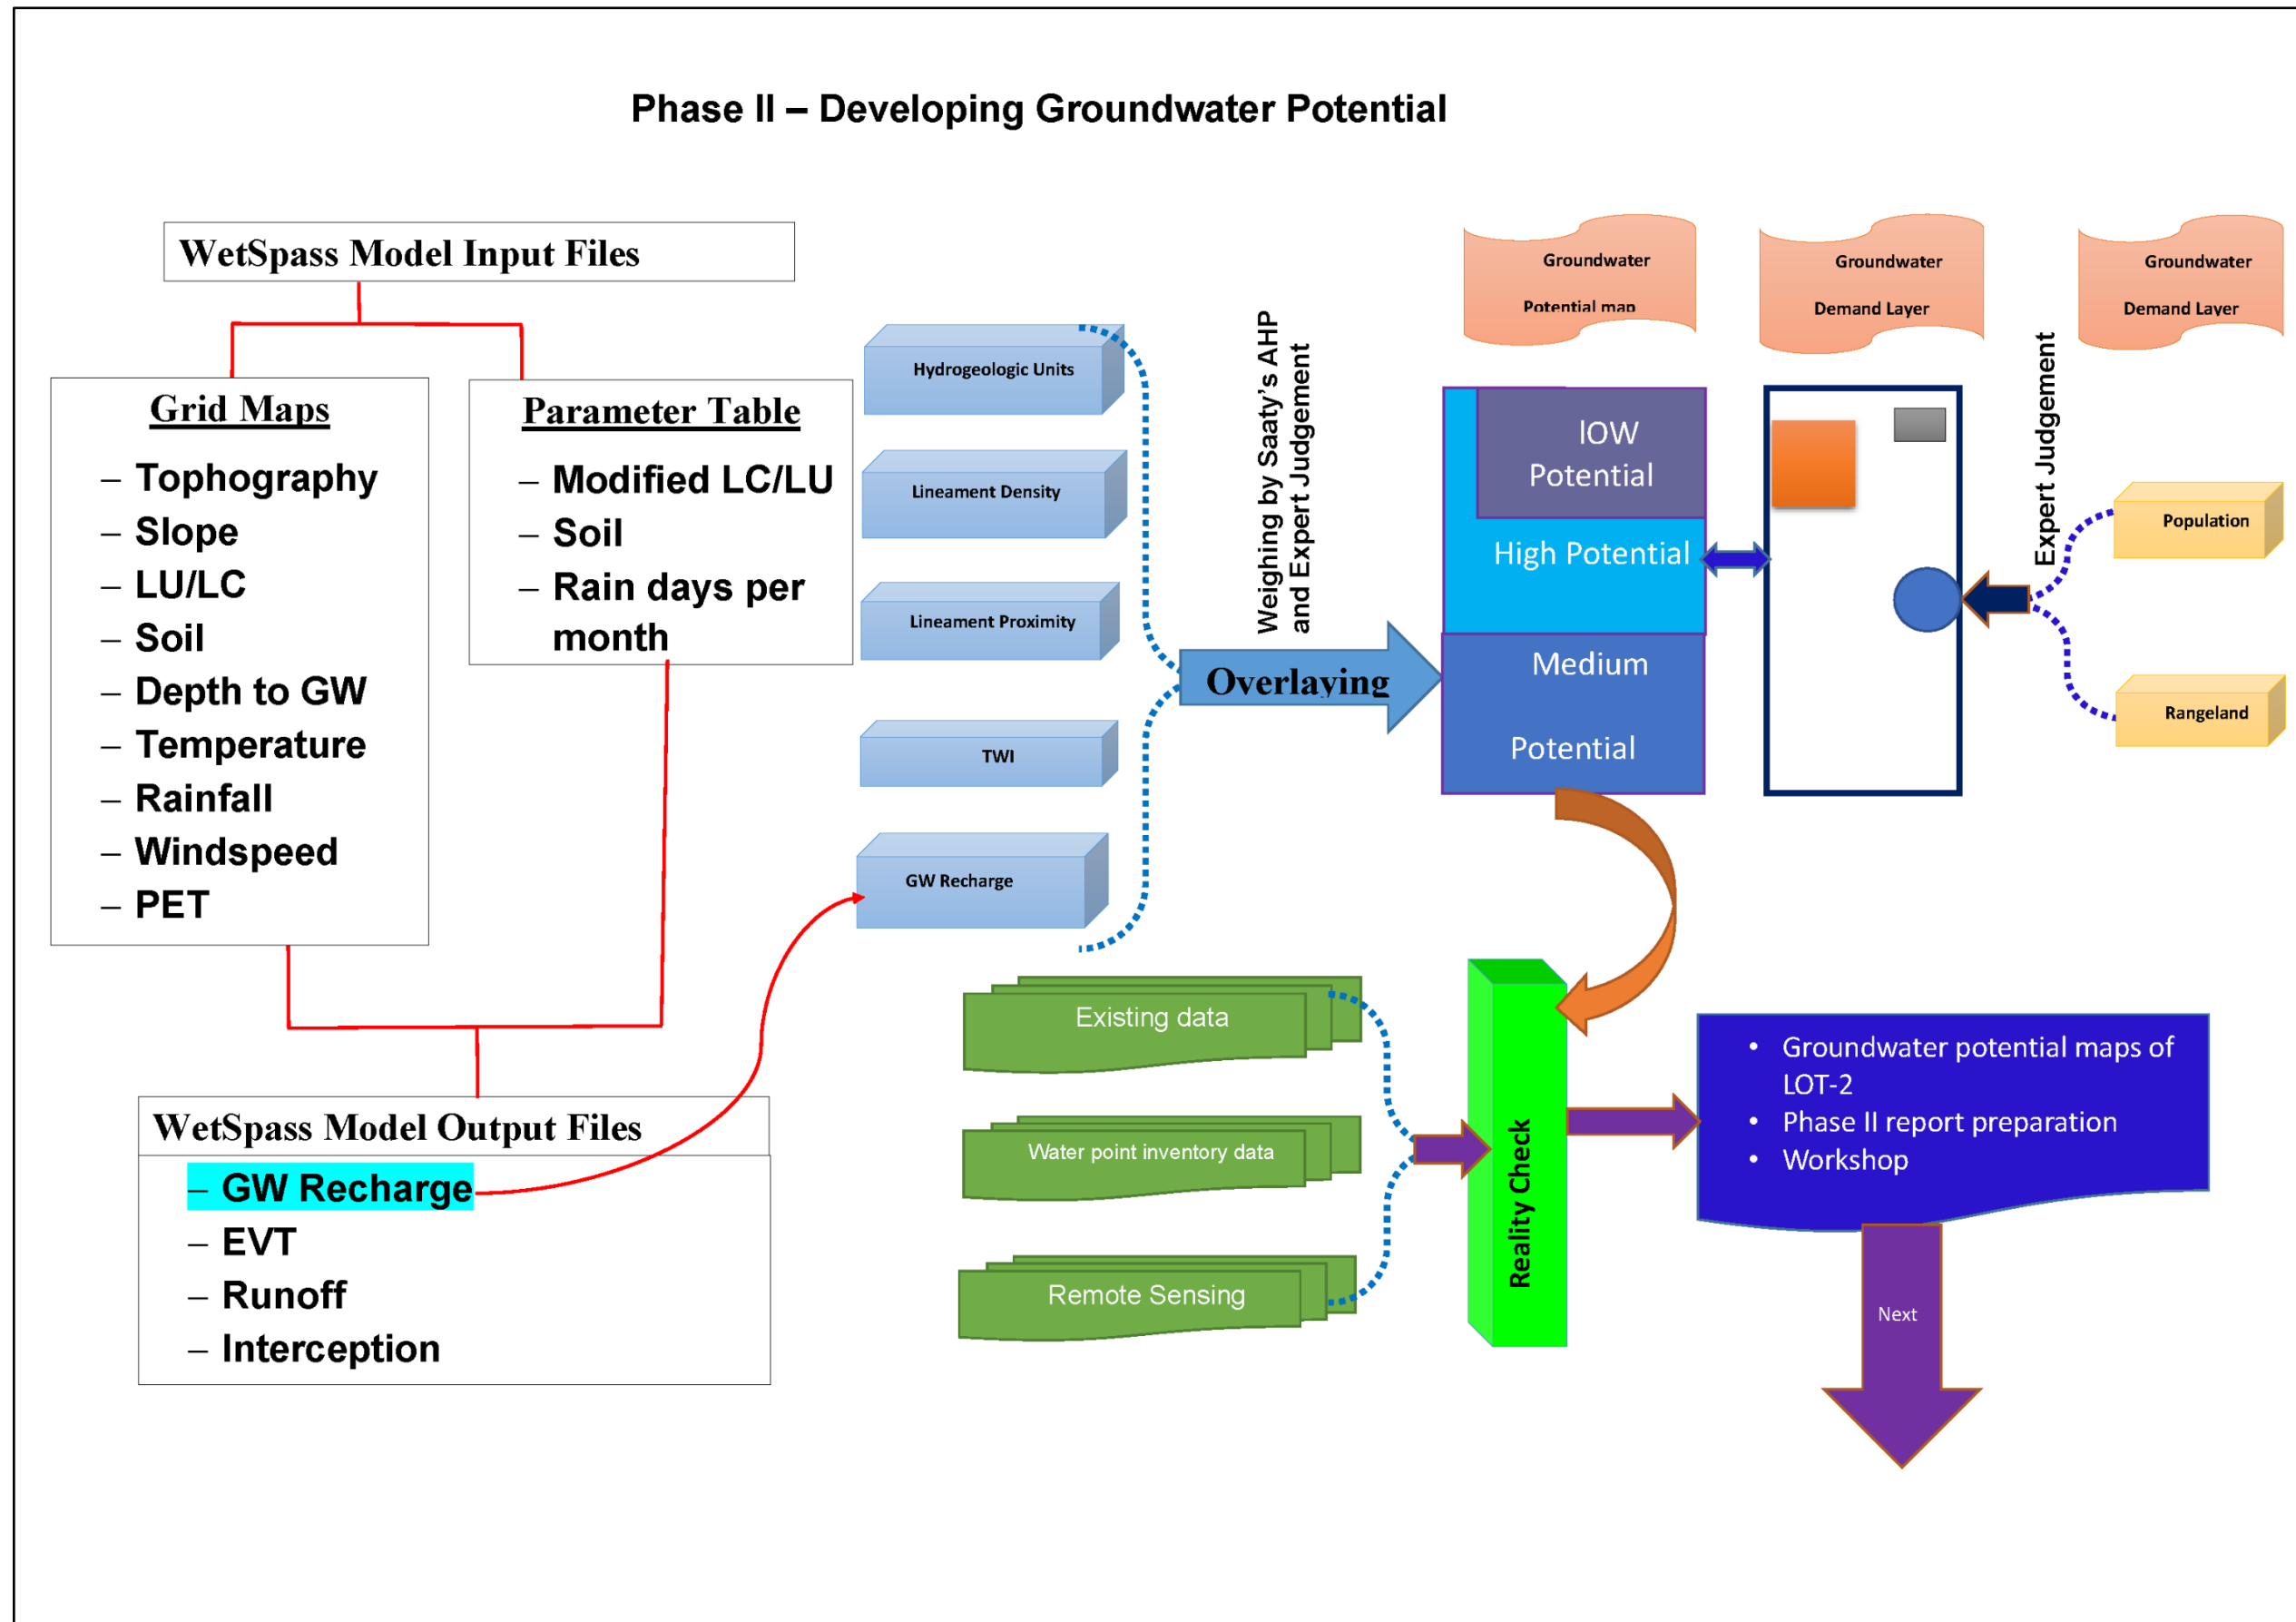


Figure 3: Phase II methods and deliverables

## **2.1 Remote Sensing data, Field Inventory, and Secondary data**

### **Remote Sensing data**

The primary issue in the projects (RS) remote sensing and GIS (Geographic Information System) span is identifying sources and availability of spatial input data and acquiring them. The data source could be primary and secondary. The primary sources are acquiring satellite images and interpreting them, field surveys, and generating out of the surveyed data. The secondary sources are previously conducted projects datasets, national and regionally such as CSA, NMA, EGS, and MoWE archives.

The Geospatial data by nature especially when we are dealing with satellite imagery with multiple band spectrums is a huge file size and hence in this project hundreds of gigabytes of data were collected and integrated. The collected data was further explored for its content, quality, consistency, and extent to use for the study as deemed as a decision support system.

The SRTM DEM with the 30-m resolution is used to extract the slope and drainage network. Topographic maps (Scale 1:50,000) from The Ethiopian Mapping Agency (EMA) are also used to digitize relevant features and drainage networks to enhance the raw DEM. Cloud-free Sentinel 2 imager that has a higher spatial resolution (10m) is used to classify land use /cover, SRTM DEM 30m resolution and Sentinel 1 imager using the interferometry approach and ESA-SNAP environment is used to extract lineament for Wuchale Wereda, SRTM DEM 30m resolution, ASTER DEM 30m resolution, Landsat-7 ETM + data 30m spatial resolution and Google Earth image @ 5m Spatial resolution, Rainfall data was used from CHIRPS, and then the satellite rainfall data was validated by using data collected from the National Meteorological Agency (NMA) of Ethiopia. The mentioned meteorological data is also suggested to be used in Ethiopian climate by different scholars. One of the advantages of CHIRPS products for groundwater recharge estimation is its characteristics of utilizing the land cover type on its algorithm while developing the product. We considered the following additional datasets: elevation, aspect, and slope derived from 30m SRTM DEM, average January and July temperature acquired from JRA - 55, average January NDVI derived from the MODIS (MOD13Q1) data, average July NDVI derived from the MODIS (MOD13Q1) data. We considered the NDVI as a potential additional dataset because the NDVI shows a fast response to precipitation (greening up), which might be more suitable to represent precipitation patterns related to the Monsoon regime i.e. rainfall patterns are seasonal and directional) compared to elevation. For similar reasons, we included aspect and slope because there might be a certain directional pattern in the rainfall distribution.

## Field Inventory and Secondary data

In addition to the remote sensing data, Secondary and primary data such as 30 years of climatological data, river discharge data, Demographic data from CSA 2007, FAO soil data, existing groundwater data, water point inventory data, and available Groundwater data and reports are collected analyzed. The Transmissivity and well discharge data were used for validation of the Groundwater potential map of the Study area The summarized inventory and existing data are presented in table 1 and the raw data is annexed (2).

Table 1: Inventoried and existing water points

Wereda	Inventoried water point				Existing water point			
	BH	Shallow wells	HDW	Spring	BH	Shallow wells	HDW	Spring
Wuchale	18	2	22	2	5	113	592	37
<b>Grand Total</b>	18	2	22	2	5	113	592	37

### Preparation of thematic layers

Preparation of thematic layers involves digitizing existing base maps, digital image processing of remote sensing data, and integration of hydrogeological field data. To produce a GWP map of the Wuchale wereda, the thematic layers of lithological units, Groundwater recharge, lineament density, lineament proximity, and TWI were prepared on a scale of 1:100,000 with a spatial resolution of 100m pixel size in a GIS environment. After the preparation of the thematic maps the rank is assigned to each thematic layers attribute based on the conceptual understanding of the Study Area, the maps were converted into raster format, and then weighted overlay analyses were carried out according to assigned suitable weights in the order of their hierarchy process (AHP) (Saaty 1980, 1992) to each thematic layers. Thematic maps for each parameter are prepared as follows.

#### 2.2.1 Geological mapping method of the study area

The present work is intended to produce a Geologic map of Wuchale Wereda at a scale of 1:100,000 by combining remote sensing and GIS. The methodologies adopted in this work are divided into; (i) Literature survey and (ii) Remote sensing and GIS studies.

A literature survey was carried out to survey the availability of the geological maps and review the available geological maps in order to get a general overview of the geology of the area and to identify the gaps and fill these gaps by Remote sensing study. The project area has previously been geologically mapped by GSE at a scale of 1:50,000 and 1:250,000. These maps were provided better information to understand the geological evolution of the project area. However, a review of these geological maps has identified the gaps listed below which are considered during the present investigations by RS and GIS studies. The gaps identified were: -

- (i) Lack of exhaustive Imagery interpretation,
- (ii) Lack of consistency in lithological naming on geological maps,
- (iii) Lack of systematic mapping of litho-stratigraphy, and

- (iv) The significance of the lithology and structural data in establishing and understanding of the geological process are not discussed in detail.

The data set used and sources for the interpretation of the remote sensing geological map of the area are shown in the table below. Image interpretation was made both by computer and on printouts in which all pertinent geological data such as lithologic units, delineation of geological contacts, geological structures (linear features, fractures, and faults), and geomorphological elements are mapped. From the different image combinations, layer stack image, decorrelation, stretch image, and IHS-to-RGB- transformation were selected for their valuable information. The IHS to RGB band 1, 2, 3 images are good in picking tonal and textural differences to identify lithologies. Generally, the Decorrelation stretch (band 6, 4, 2) and IHS-RGB transformation (3, 2, 1) image combination identified possible lithologic units on the project area. Moreover, DEM data were used for geomorphological mapping and tracing major lineaments.

Use of GIS and RS software (ArcGIS, ERDAS Imagine, ENVI, Global Mapper, GeoMatica) together with the existing geologic maps were used to prepare the geological map of the Wuchale Wereda at a scale of 1:100.000. The Geology map of the Wuchale Wereda is presented in annex (3).

Table 2: Existing geological map and Remote sensing data sources

No.	Data used	Data source
1	Topo map @ 1:50,000 and 1:250,000 scale	EMA, 1975
3	Geological Maps of Project Sites @ 1:50,000 and 1:250,000 scale	GSE
4	Shuttle Radar Topography Mission (SRTM), DEM Data @ 30m Spatial Resolution	NASA, & USGS EROS Data Center, 2006 <a href="http://glcfapp.glc.f.umd.edu:8080/esdi">http://glcfapp.glc.f.umd.edu:8080/esdi</a>
5	ASTER Global Digital Elevation Model (GDEM), DEM Data @ 30m Spatial Resolution	Japan Space Systems (J-space systems) Japan, cooperation with US, 2009 <a href="http://gdem.ersdac.ispacesystems.or.jp/search.jsp">http://gdem.ersdac.ispacesystems.or.jp/search.jsp</a>
6	LandsAT-7 ETM+ (Enhance Thematic Mapper) Data @ 30m Spatial Resolution	Global Land Cover Facility (GLCF) <a href="http://glcfapp.glc.f.umd.edu:8080/esdi/">http://glcfapp.glc.f.umd.edu:8080/esdi/</a>
7	Google Earth Image @ 5m Spatial Resolution	US Dept. of State Geographer, 2021

## 2.2.2 Lineament Extraction method

In this study, two DEM sources were used to generate lineaments of the study area. The first one is SRTM 30m resolution DEM. The second data source used to generate lineament of the study area is Sentinel I imagery using the interferometry approach and ESA-SNAP environment.

As input for the first method, a digital elevation model (DEM) was obtained from SRTM. The study area covers 12 DEM Tiles in total and all the tiles were mosaic in the ArcGIS software environment.



### **Lineament extraction process from SRTM 30m resolution**

The lineament extraction process was carried over the overlaid shaded relief images with multi-illumination directions of (0°, 45°, 90°, 135°, 220°, and 345° azimuth and sun angle of 30°). PCI Geomatica software was used for the automatic lineament extraction. These steps were carried out under the different thresholds, and then lineament extracted was manually filtered by overlaying hill shade, drainage density, and road map of the Study area

### **DEM extraction process from Sentinel - 1 Imagery using Interferometry approach and ESA-SNAP**

The second option checked for the lineament extraction is Sentinel 1 using the interferometry approach. We download the Sentinel 1A image and generate DEM, The DEM is used to generate hillsides and extract lineament in PCI GeoMatica. The same parameter, process, and azimuthal angle are applied to the hill shade which is generated from the sentinel 1 image. PCI GeoMatica with different threshold parameters was used to extract the lineaments.

Therefore, the final generated lineament from Sentinel imagery was manually filtered by overlaying hill shade, drainage density, and road map of the Study area Generally, the lineament extracted by using SRTM 30m and Lineament extracted from Sentinel 1A image were validated by ground-truthing and by comparing with the existing 1:250,000 geological map of the Study area.

### **2.2.3 Groundwater recharge estimation methods**

In this study, the Hydrological study was conducted by considering the overall hydrological connectivity of the basin; hence it was important to consider all weredas upstream hydrological characteristics, particularly for all wereda where Main River crosses its boundary by considering the recharging source could be the cumulative effect both the drainage within wereda or rivers crossing Wuchale wereda. As the result, all upstream portions of the selected wereda were considered.

### **Data used for Groundwater Recharge estimation**

The water balance quasi-steady-state model (WetSpass) requires a set of input data, that encompasses meteorological data (temperature, precipitation, wind speed, and potential evapotranspiration), distributed groundwater depth, topography (DEM and slope), land use/land cover, and soil types of the Abay River Basin (Ampe et.al. 2012). A list of data that was used as input after resampled into 100m by 100m is presented in table 3. The spatial representation of land use, soil, Rainfall, Temperature, wind speed, PET and Elevation maps, and modified land use, soil, and rain days per months parameter tables used as an input for the model is presented in phase III water balance reports.

Table 3: Dataset used for the evaluation of groundwater recharge

S. N	Input data	Data name	Resolution	Period	Description
1	Rainfall	CHIRIPS	0.25°x 0.25°	1980- 2019	Climate Hazards Group Infrared Precipitation with Station data (CHIRPS) designated by incorporating multi-source infrared sourced product. CHIRPS rainfall products and some Spatio-temporal analyses of rainfall using CHIRPS over Ethiopia and other Eastern-Africa regions indicates a potential to be used for various applications (Fenta. A, et. al., 2012; Ayehu, G, et.al. 2018; Maidment. R, et. al., 2013)
2	Temperature	JRA-55	0.56° x 0.56°	1958-2019	Japanese global atmospheric reanalysis project, where The Japan Meteorological Agency (JMA) conducted the second Japanese global atmospheric reanalysis, called the Japanese 55-year Reanalysis or JRA-55. Kobayashi et al. ,2015)
3	Wind speed	ECWF-ERA5		1979-2019	
4	Potential evapotranspiration	Calculated	30 km x 30km		penman-monteith and modified penman-monteith (for open water) used for calculation of PET
5	Groundwater depth	Historic GW data by ECDSWC			
6	Slope	SRTM	30m X 30m	--	SRTM (Shuttle Radar Topography Mission) DEM is a unique product that was produced by NASA and NGA in cooperation with the German and Italian space agencies. The slope of the study area is derived from this high-resolution digital elevation model.
7	Land use/ land cover	Esri	10mx 10m	2020	The recent land use-land cover (2020G.C) was used for the analysis. This layer displays a global map of land use/land cover (LULC). The map is derived from ESA Sentinel-2 imagery at 10m resolution. It is a composite of LULC predictions for 10 classes throughout the year in order to generate a representative snapshot of 2020
8	Soil	FAO			Harmonized World Soil Database v 1.2 and supervised in the Ethiopian context

## Groundwater Recharge Estimation Method

Three software or models were used for the study. Spatially distributed water balance quasi-steady-state model (WetSpass), programming language(R) software that is designed for statistical computing and graphics, and geographical information systems (GIS) for analysis and presenting results. The WetSpass stands for water and energy transfer among plants, soil, and atmosphere. A physically-based WetSpass model is usually applied to assess long-term mean spatial pattern and characteristics of recharge, surface runoff, and actual evapotranspiration. In this project, the main target of the WetSpass model is to evaluate the monthly recharge of Wuchale wereda and eventually to understand long term mean annual recharge of the Wuchale Wereda.

As the main task of hydrological analysis is to estimate groundwater recharge in the proposed wereda, the tool commonly recommended for spatial-based groundwater recharge estimation too, WetSpass model were applied. The WetSpass model treats a basin or region as a regular pattern of raster cells. Every raster cell is further sub-divided in a vegetated, bare soil, open water, and impervious surface fraction, for which independent water balance is maintained.

The total water balance per raster cell and hydrological season, calculated as follows: -

$$E_{\text{raster}} = a_v ET_v + a_s E_s + a_o E_o + a_i E_i \text{-----Eq.1}$$

$$S_{\text{raster}} = a_v S_v + a_s S_s + a_o S_o + a_i S_i \text{-----Eq.2}$$

$$R_{\text{raster}} = a_v R_v + a_s R_s + a_o R_o + a_i R_i \text{-----Eq.3}$$

Where the index raster refers to raster cell, with  $ET_{\text{raster}}$ ,  $S_{\text{raster}}$  and  $R_{\text{raster}}$  respectively, the total evapotranspiration, surface runoff and recharge in a raster cell and  $a_v$ ,  $a_s$ ,  $a_o$  and  $a_i$  respectively the vegetated, bare soil, open water, and impervious area fractions of a raster cell.

The geographic information system (GIS) tool was used for re-sampling and mapping of both input and output parameters. Among four common techniques of re-sampling or adjusting meteorological data resolution, bilinear methods were used to adjust the resolution of precipitation, temperature, and wind speed data towards 100 by 100 meters based on client interest. Overall schematic representation of the applied methodology is presented in figure 4 below:

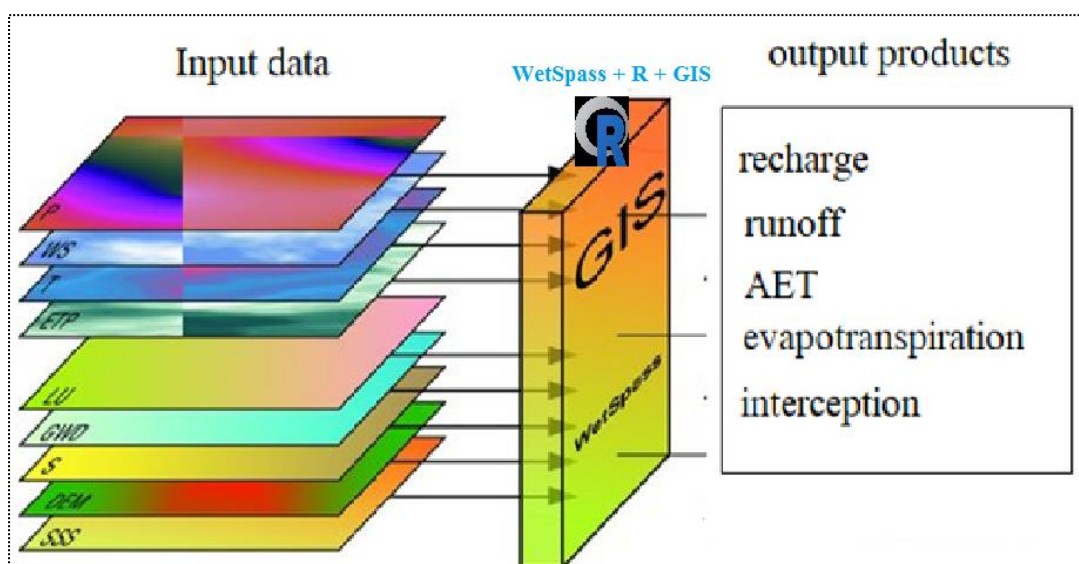


Figure 4: Schematic representation of model used for the study

## Land cover data Extraction method

### Downloading and processing raster data for land cover classification

Cloud-free Sentinel 2 imagery that has a higher spatial resolution (10 m) is used for LULC image classification. In this stage over 18 sentinels - 2b images were downloaded and pre-processed (geometrically and radio metrically corrected using QGIS software semi-automatic classification (SCP) plugin. In addition, each image was mosaic, enhanced, and resampled using the nearest-neighbor sampling technique in ERDAS IMAGINE Software. All the resampled images were mosaicked for further process (sub setting, LULC reclassification) using ENVI classic software.

Side by side while capturing fresh primary land cover classification techniques used above, for this project the ESRI land cover of 2020 is used as input. In 2020 ESRI developed a global land cover map from ESA Sentinel-2 10m resolution image and classified it into 10 classes. The originator of the data is suggested to use the dataset for food security, hydrologic modeling, conservation planning, and other related investigations. And hence this dataset will be explored and integrated into our hydrologic modeling with supplements from the land use/cover data generated through the methodologies indicated above.

Therefore, we reclassified the LULC map of ESRI based on our methodology, it was reclassified in 8 classes using Arc GIS reclassification techniques.

Therefore, we reclassified the LULC map of ESRI based on our methodology, it was reclassified in 8 classes using Arc GIS reclassification techniques.

- i. Convert raster data into vector
- ii. Take an AOI for an additional LULC class, for instance, forest. This class was not included in the ESRI LULC classification
- iii. Convert the vector into a raster
- iv. Reclassify the raster data with the newly generated LULC classes

## Accuracy assessment of supervised classification methods for the re-classified LULC

Accuracy assessment is an important part of any classification project. It compares the classified image to another data source that is considered to be accurate or ground truth data. Thus, high-resolution imagery (Sentinel-2 and Google earth images) was applied for Ground Truth. The accuracy assessment has been done for Wuchale wereda over the project area.

The accuracy assessment aims to provide an index of how closely the derived class allocations depicted in the thematic land cover map represent reality. In essence, the summary metrics of accuracy provide a measure of the degree of correctness in the class allocations in the map. Attention is, therefore, focused on thematic accuracy. The confusion matrix is well suited to this task (Table 4). The cases that lie on the main diagonal of the matrix represent those correctly allocated, while those in the off-diagonal elements represent errors. Two types of thematic error, omission, and commission, are possible and both may be readily derived from a confusion matrix (Congalton and Green, 1999). An error of omission occurs when a case belonging to a class is not allocated to that class by the classification. Such a case has been erroneously allocated to another class, which suffers an error of commission.

The most common way to assess the accuracy of a classified map is to create a set of random points from the ground truth data and compare that to the classified data in a confusion matrix. The assessment was done using ArcGIS software.

Checked the error matrix with the formula (Accuracy in % = total true value/total sample value\*100) and the total accuracy is 92.22% which is very good.

Table 4: confusion matrix over true values in the Study area.

OBJECTID	Predicts	Class1	Class2	Class3	Class4	Class5	Class6	Class7	Class8	Total True Value	Total Sample Value	Total Accuracy %
1	1	16	0	0	0	0	0	0	0			
2	2	0	20	0	4	0	0	0	0			
3	3	0	0	37	0	0	0	0	0			
4	4	0	5	0	16	0	0	0	0			
5	5	0	0	0	0	29	1	0	0			
6	6	0	0	0	2	0	24	0	1			
7	7	0	0	0	0	0	0	29	0			
8	8	1	0	0	0	0	1	0	7	178		
		17	25	37	22	29	26	29	8		193	92.22%
										Total Accuracy = Total True Value/Total Sample Value *100		

Land cover/land use map with 92.22 accuracy was prepared and used as an input file for groundwater recharge estimation.

## Normalized difference vegetation index (NDVI)

Vegetation indices are a staple remote sensing product and the normalized difference vegetation index (NDVI) is the most widely used vegetation index. The NDVI is a standardized index allowing to generate an image displaying greenness (relative biomass). This index takes advantage of the contrast of the characteristics of two bands from a multispectral raster dataset—the chlorophyll pigment absorption in the red band and the high reflectivity of plant materials in the near-infrared (NIR) band.

NDVI measures the ratio of the reflective difference in the red and near-infrared portions of the spectrum to the sum of red and near-infrared reflectance. Green, healthy vegetation reflects light in the near-infrared portion of the spectrum and absorbs red light, and ranges from values of 1.0 to -1.0 where larger, positive values indicate green vegetation.

One of the input spatial layers for the hydrogeology study is NDVI. To calculate NDVI the inputs are availing appropriate imagery and a program that allows interaction with the image data. QGIS is a great, free option for a GIS program that provides the tools to display, analyze and present remotely sensed data. The following steps below are followed in QGIS and its toolbox environment to calculate NDVI for the Wuchale Wereda and sample main screenshots were added as pictures for demonstration purposes. As usual, the process started by downloading sentinel 2 images of required bands and used as input for the processing.

- i. Open stacked sentinel 2 images in QGIS.
- ii. FOR NDVI calculation we are using NIR (band 8) and red (band 4)
- iii. Use the raster calculator in QGIS is to calculate NDVI.
- iv.  $NDVI = \frac{NIR-RED}{NIR + RED}$

Then the resulting NDVI is classified for visualization purposes and shown in the figure below

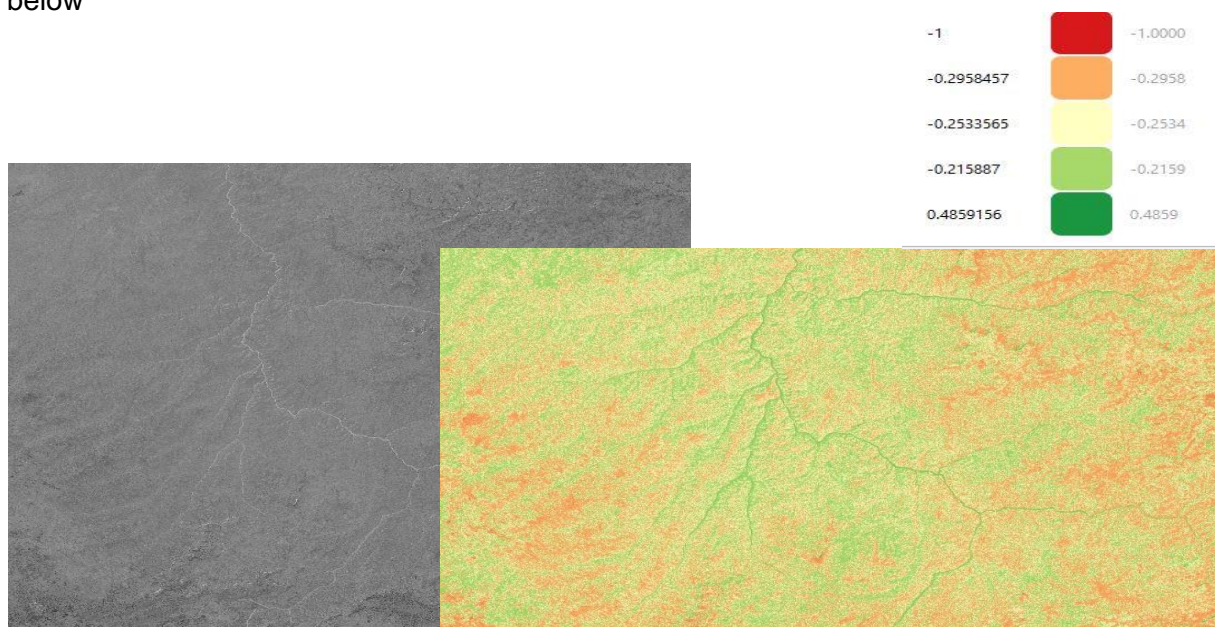


Figure 5: calculated NDVI using QGIS

## 2.2.4 Topographic Wetness Index (TWI) generation

TWI (also known as the compound topographic index (CTI)) is an indicator that measures the potential on where water tends to accumulate. A high index value indicates a high potential of water accumulated due to a low slope and vice versa.

Typically, the raw TWI indicators range from -3 to 30. The TWI is a unique tool that allows the user to identify areas that could be:

- Identifying the area adversely affected by ponding and flooding caused by rainfall events
- Can provide planners a visual mechanism for site selection of green infrastructure projects
- The identification of areas with increased susceptibility to ponding due to sewer overflow or basement back-ups

The equation given below was used for the estimation of TWI.

$$TWI = \ln \frac{\alpha}{\tan\beta} \text{-----Eq.4}$$

$\alpha$  = upslope contributing area;  $\beta$  = Topographic gradient (Slope)

## 2.2.5 Demography data of the Wuchale Wereda

In order to estimate water demand knowing the population growth rate is very important. Accordingly, the population of Wuchale wereda is estimated to grow at the rate of 3.46%, 2.99% & 2.65% annually in accordance with 2025, 2030 & 2035 CSA estimates of population growth rate for Oromia region respectively. The projection is based on exponential growth rate model which goes,  $P_t = P_o e^{r\Delta t}$

When:  $P_t$  = Population at t year

$P_o$  = Population at current (initial) year

$e = \ln 10 = 2.718$

$\Delta t$  = the difference between t year and initial year

Therefore, based on the above exponential population projection formula, the current population size of Wuchale wereda is projected for the planning period 2035 and the summarized population size is presented in the following tables.

Table 5: Population size of Wuchale wereda, July 2021 to 2035

Year	$\Delta t$	Growth Rate	Wuchale Wereda	
			Wuchale Rural	Muke Turi Twon
2021	0		125,128	12,702
2025	4	3.46%	143,699	14,587
2030	5	2.99%	166,869	16,939
2035	5	2.65%	190,508	19,339

Table 6: Number of livestock and Livestock and poultry (for private holdings), July 2021

Wereda	Cattle	Goats	Sheep	Horses	Mules	Donkey	Poultry
Wuchale	182513	4185	88469	27640	2554	31854	60741

### **3. Conceptual Hydrogeological model of the study area**

#### **3.1 Hydrogeological condition of Wuchale Wereda**

Based on hydraulic characteristics of rock units, spring discharge, depth to the groundwater, mode of recharge, and groundwater intake to their system, the Hydrogeological condition of Wuchale wereda is conceptualized and discussed as follows:

##### **Conceptual Hydrogeological model of Wuchale wereda**

Wuchale wereda is located partly in the Jema sub-basin and partly in the mugger sub-basin. Topographically, Wuchale wereda is plain land. Most part of the wereda is covered by alluvial deposits and volcanic rocks, mainly Aiba and Tarmaber basalts. The yield and transmissivity of boreholes drilled in this wereda revealed that the intergranular alluvial aquifer and the basaltic aquifer have moderate to very high groundwater potential due to primary and secondary permeability of the lithological units exposed in the area.

As depicted on the hydrogeological map and also cross-section constructed along the groundwater flow path to conceptualize groundwater flow and storage in this wereda (Figure 6 and 7), the local geomorphic setup and subsurface configuration of permeable and impermeable rock units control the depth and pattern of groundwater circulation in the area. The E-W oriented horst of the impermeable mudstone underlying the Tertiary volcanic control aquifer distribution into Muger and Upper Awash groundwater sub-basin where surface water and groundwater divides do not coincide.

The elevation of depth to groundwater level in hand-dug wells and deep boreholes shows that groundwater tapped by hand-dug wells and deep boreholes is in different flow systems. The elevation of depth to water levels in hand-dug wells is very near the surface and represents the local groundwater sub-system in the upper water-table aquifer that discharges to the nearest surface water bodies or infiltrates downward and recharges the basaltic aquifer underneath.



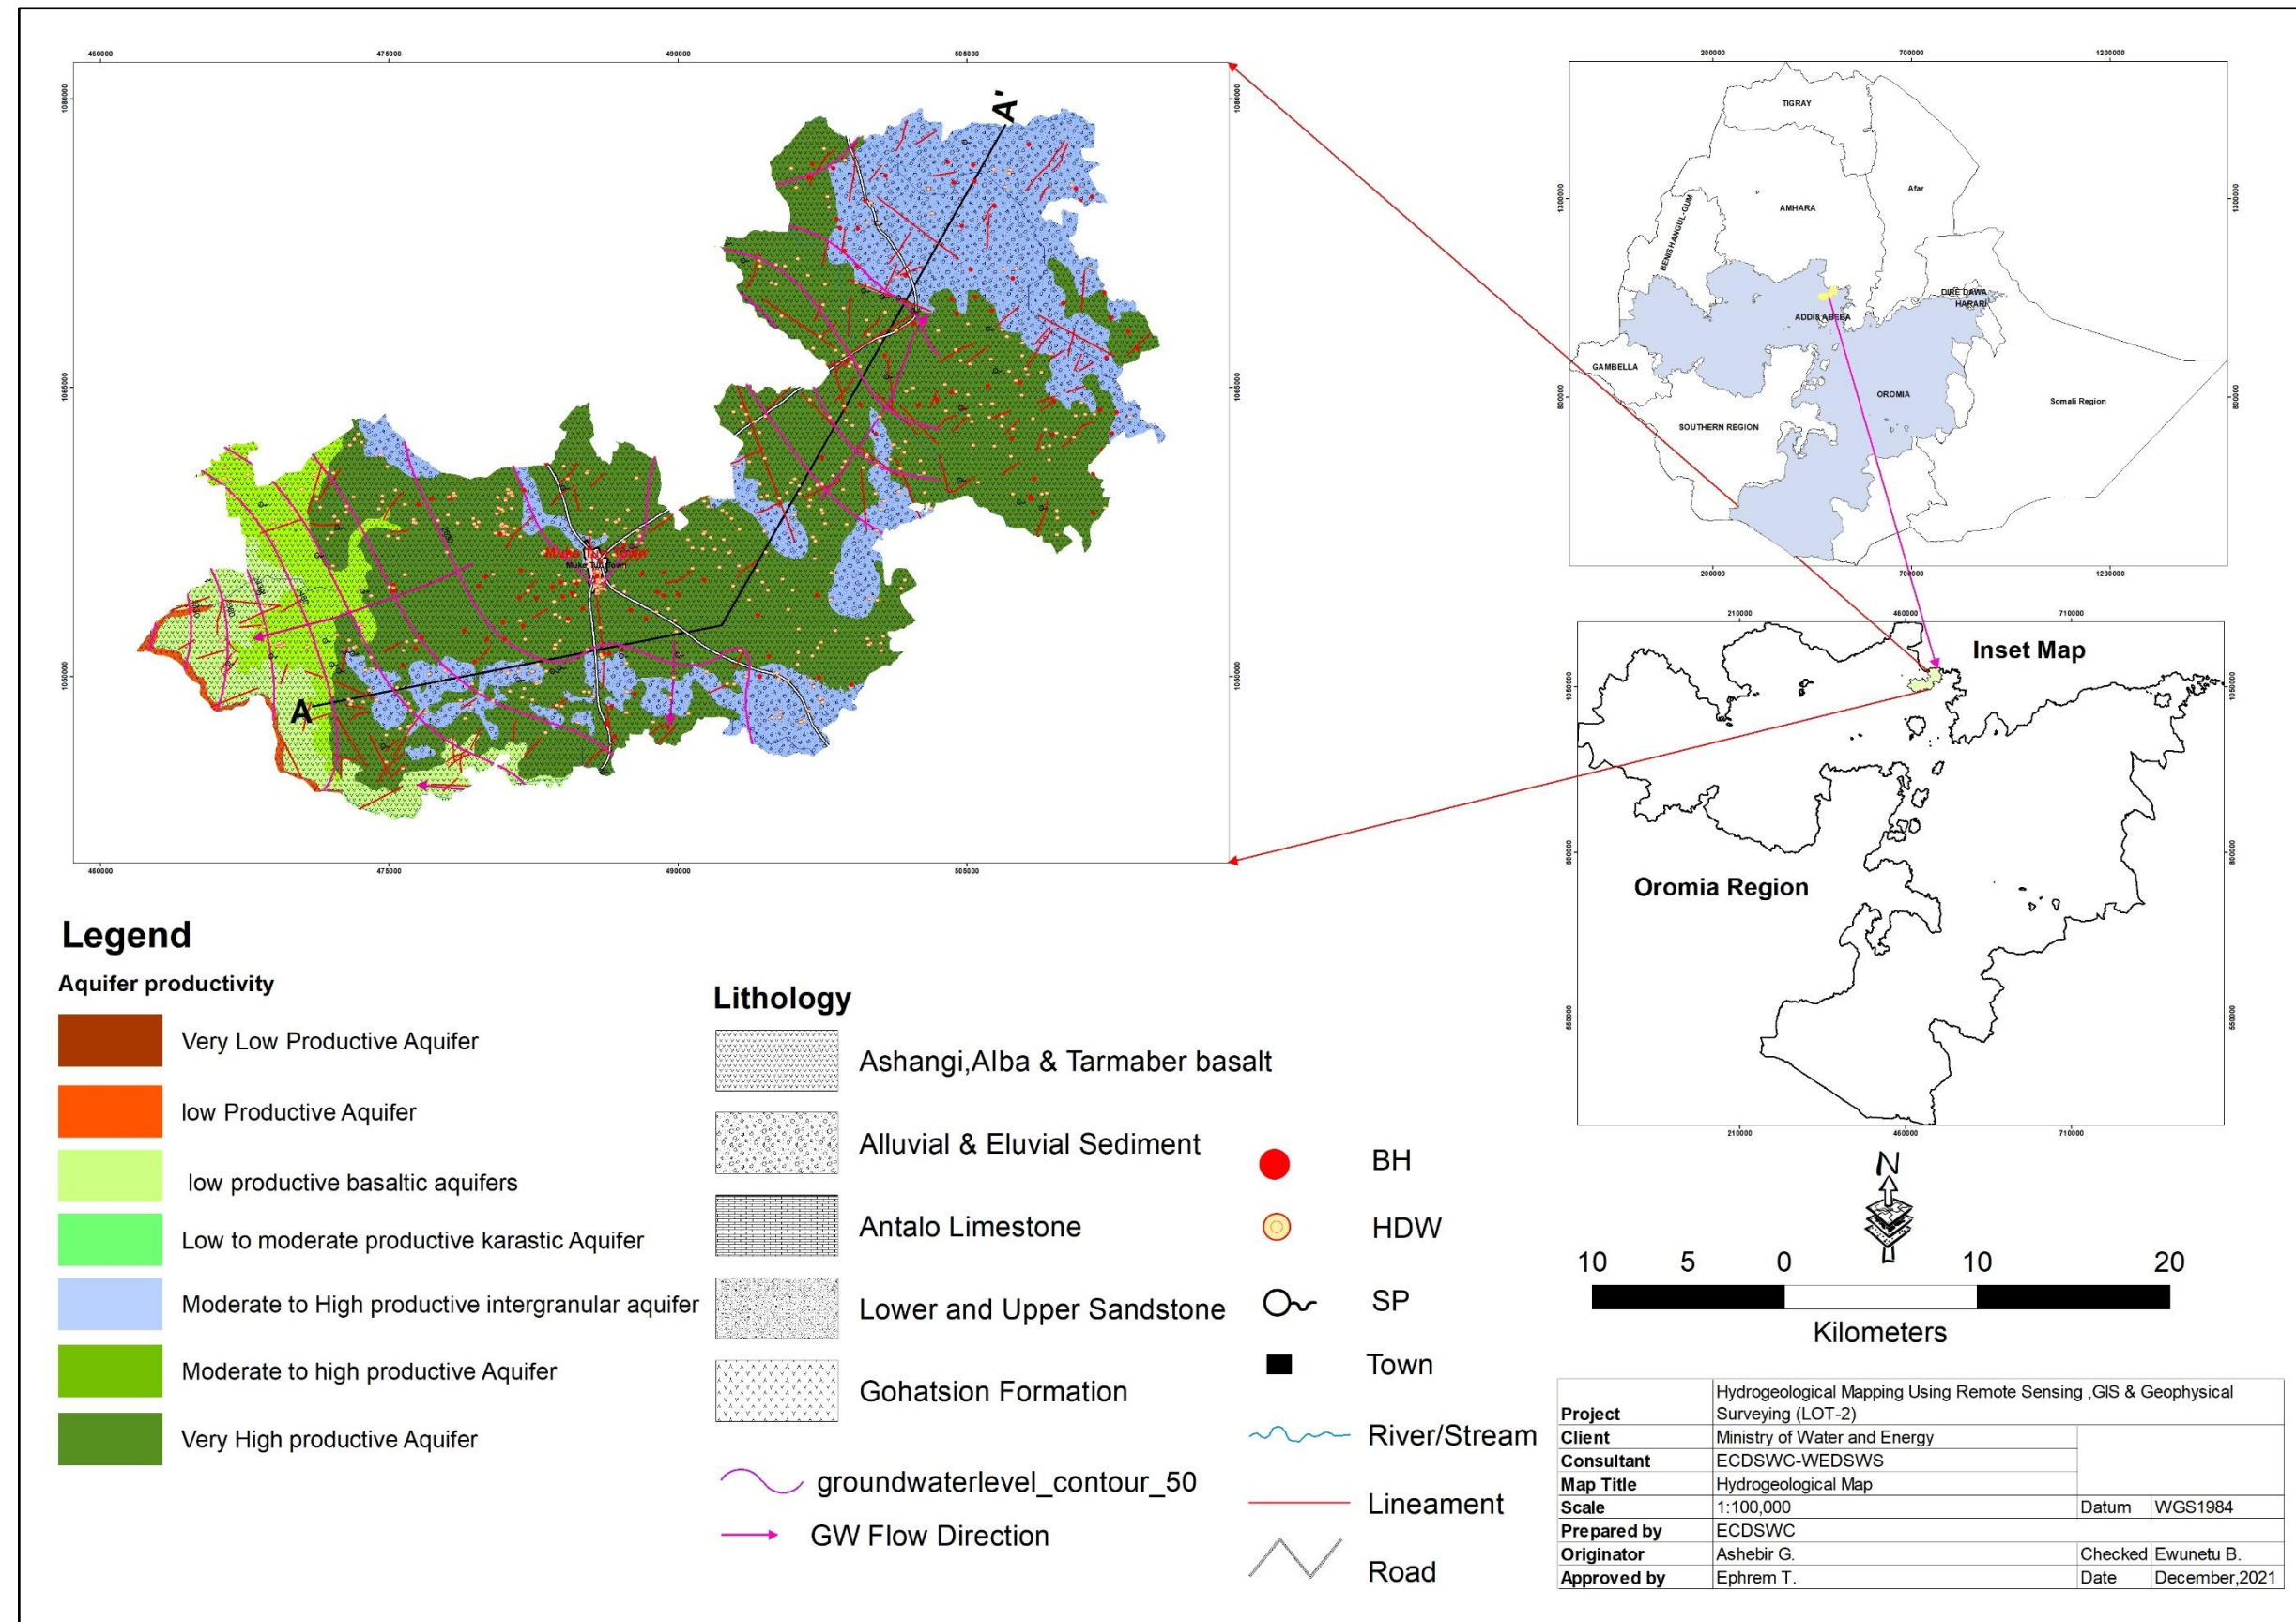


Figure 6 : Hydrogeological map of Wuchale wereda

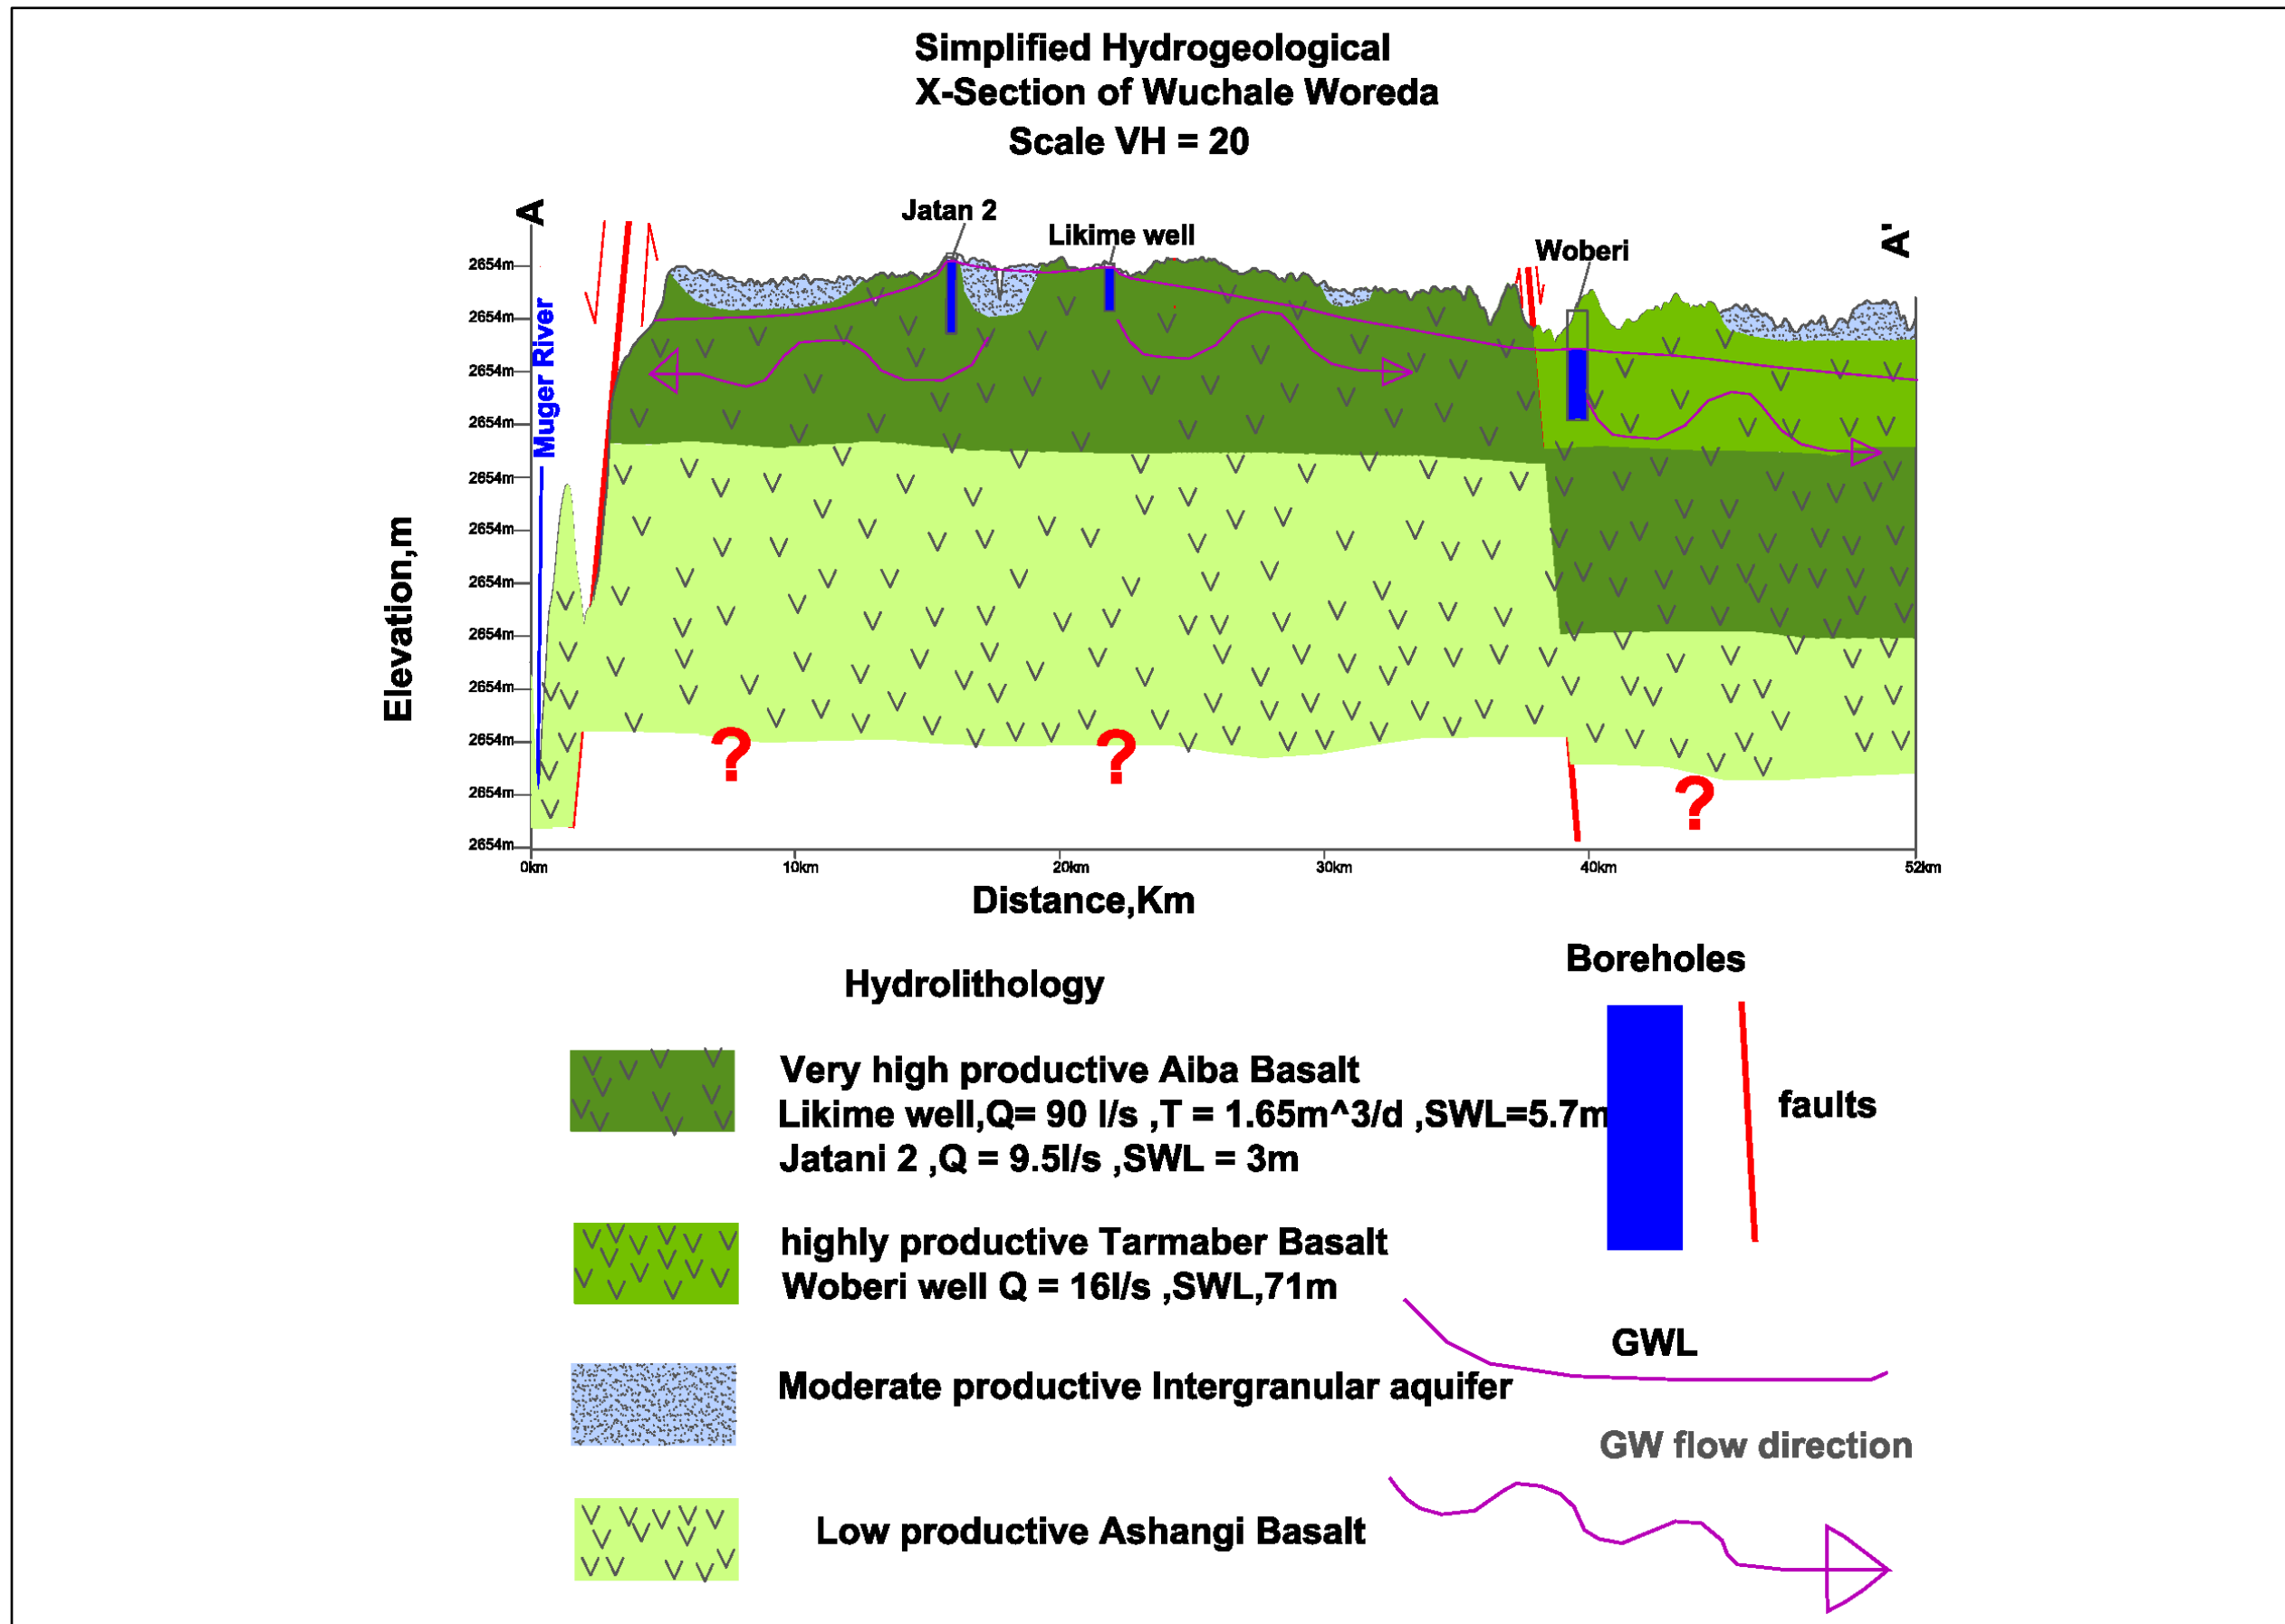


Figure 7 : Hydrogeological section of Wuchale weredas

## 4. RESULT AND DISCUSSION

### 4.1 Multi-criteria decision analysis (MCDA) Weight assignment using AHP of Wuchale wereda

Five information layers (Lithology, Recharge, TWI, Lineament density, and Lineament proximity) that determine the groundwater potential are selected for Wuchale wereda, and weights are determined based on the conceptual groundwater system for Wuchale wereda.

The waiting criteria are prepared by AHP (Analytic Hierarch process) (EVM multiple inputs) (K.D. Version 15.09.2018) based on the conceptual model and thematic layers proposed to use. As the hydrogeological conditions vary greatly across the projects, weights were determined for Wuchale Wereda separately. The result is shown in the tables below. The minimum and maximum values are included as well, which will be taken as the basis for sensitivity analyses on the mapped groundwater potential zones.

#### Analytic Hierarchy Process

The first step of the AHP method is to assign the level of importance of each factor based on Saaty's (2008) scale values. Consequently, all factors are compared in a pairwise comparison matrix. The weight which was assigned to different thematic layers was normalized using Saaty's AHP techniques. To control and test the Consistency Ratio (CR) is calculated. The first step to calculate CR is to compute the maximum eigenvalue ( $\lambda_{max}$ ). Then, calculate the consistency Index (CI) using equation 5, where n is a number of factors. CR is resulted by dividing CI by RI (ratio Index). The value of RI is given based on Saaty's 1 – 9. If the value is less than 0.1, the judgment of weights is acceptable and consistent. If CR is greater than 10%, we need to revise the subjective judgment.

$$CI = \frac{\lambda_{max} - n}{n - 1} \text{-----Eq.5}$$

**Consistency Ratio = Consistency Index /Random Index**

$$CR = \frac{CI}{RI} \text{-----E.q.6}$$

Table 7: Random Index

Attribute	3	4	5	6	7	8	9	10
RI	0.52	0.89	1.11	1.25	1.35	1.4	1.45	1.49

Table 8: Pair-wise Comparison Matrix by using AHP for Wuchale wereda.

Matrix			Lithology	Recharge	TWI	Lineament density	lineament Proximity	normalized principal Eigenvector
			1	2	3	4	5	
Lithology		1	1	2	3	6	7	43.02%
Recharge		2	1/2	1	3	6	7	32.41%
TWI		3	1/3	1/3	1	3	3	13.97%
Lineament density		4	1/6	1/6	1/3	1	1	5.48%
Lineament Proximity		5	1/7	1/7	1/3	1	1	5.13%

Criterion	Comment	Weights	+/-
1 Lithology		43.0%	12.3 %
2 Recharge		32.4%	7.3%
3 TWI		14.0%	2.1%
4 lineament density		5.5%	0.9%
5 lineament Proximity		5.1%	0.6%

<b>Eigenvalue</b>		Lambda	: 5.079	MRE:	20.0 %
<b>Consistency Ratio</b>	0.37	GCI	: 0.07	Psi	: 0.0%
		CR	: 1.8 %		

Table 9: Assigned rank for various classes of all thematic layers of Wuchale wereda

Factors	Weight	Class	Groundwater Storage potential	Assigned Rank
Lithology	43.02	Aiba Basalt	Very high productive	5
		Alluvium / Quaternary Basalt/Tarmaber	High productive	4
		/limestone	Moderate	3
		Adigrat Sandstone	low Productive	2
		Debre Libanos Sandstone/Muger Mudstone	Very low Productive	1
Recharge	32.41	459.67 - 280.01	Very high	5
		292.21 - 230.86	High	4
		230.85 - 160.74	Medium	3
		160.73 - 95.87	low	2
		95.86 - 11.71	Very Low	1
TWI	13.97	19.73 - 12.92	Very high	5
		12.91 - 10.29	High	4
		10.28 - 8.37	Medium	3
		8.36 - 7	low	2
		6.99 - 4.48	Very Low	1
Lineament Density	5.48	2.25 - 1.2	Very high	5
		1.19 - 0.81	High	4
		0.8 - 0.49	Medium	3
		0.48 - 0.18	low	2
		0.17 - 0	Very Low	1
Lineament Proximity	5.13	0 - 250	Very high	5
		250 - 750	High	4
		750 - 1250	Medium	3
		1250 - 2000	low	2
		2000 - 5000	Very Low	1

## **4.2 Reclassification of Thematic layers**

### **4.2.1 Hydro - lithologic units**

Hydrogeological units play a fundamental role in governing the spatial distribution and occurrence of groundwater. The porosity, size of pore space, and the ease at which the pore spaces are interconnected control storage and permeability of geologic medium that in turn affect the availability of groundwater in the area of interest. The main lithologic units found in the study area consist of Elluvium& alluvial sediments, Aiba basalt, and Tarmaber-Megezez basalt. These lithologic units have been given weights (rates) based on hydraulic properties (hydraulic conductivity, transmissivity, Storativity and yields observed from pumping test, lithologic log (well completion reports) of the area. Based on the conceptual understanding of the Wuchale Wereda, the Hydrogeological units of the Wuchale Wereda were classified as very high, high, moderate, low, and very low potential. The reclassified hydrogeological units are presented in Figure 8 below.



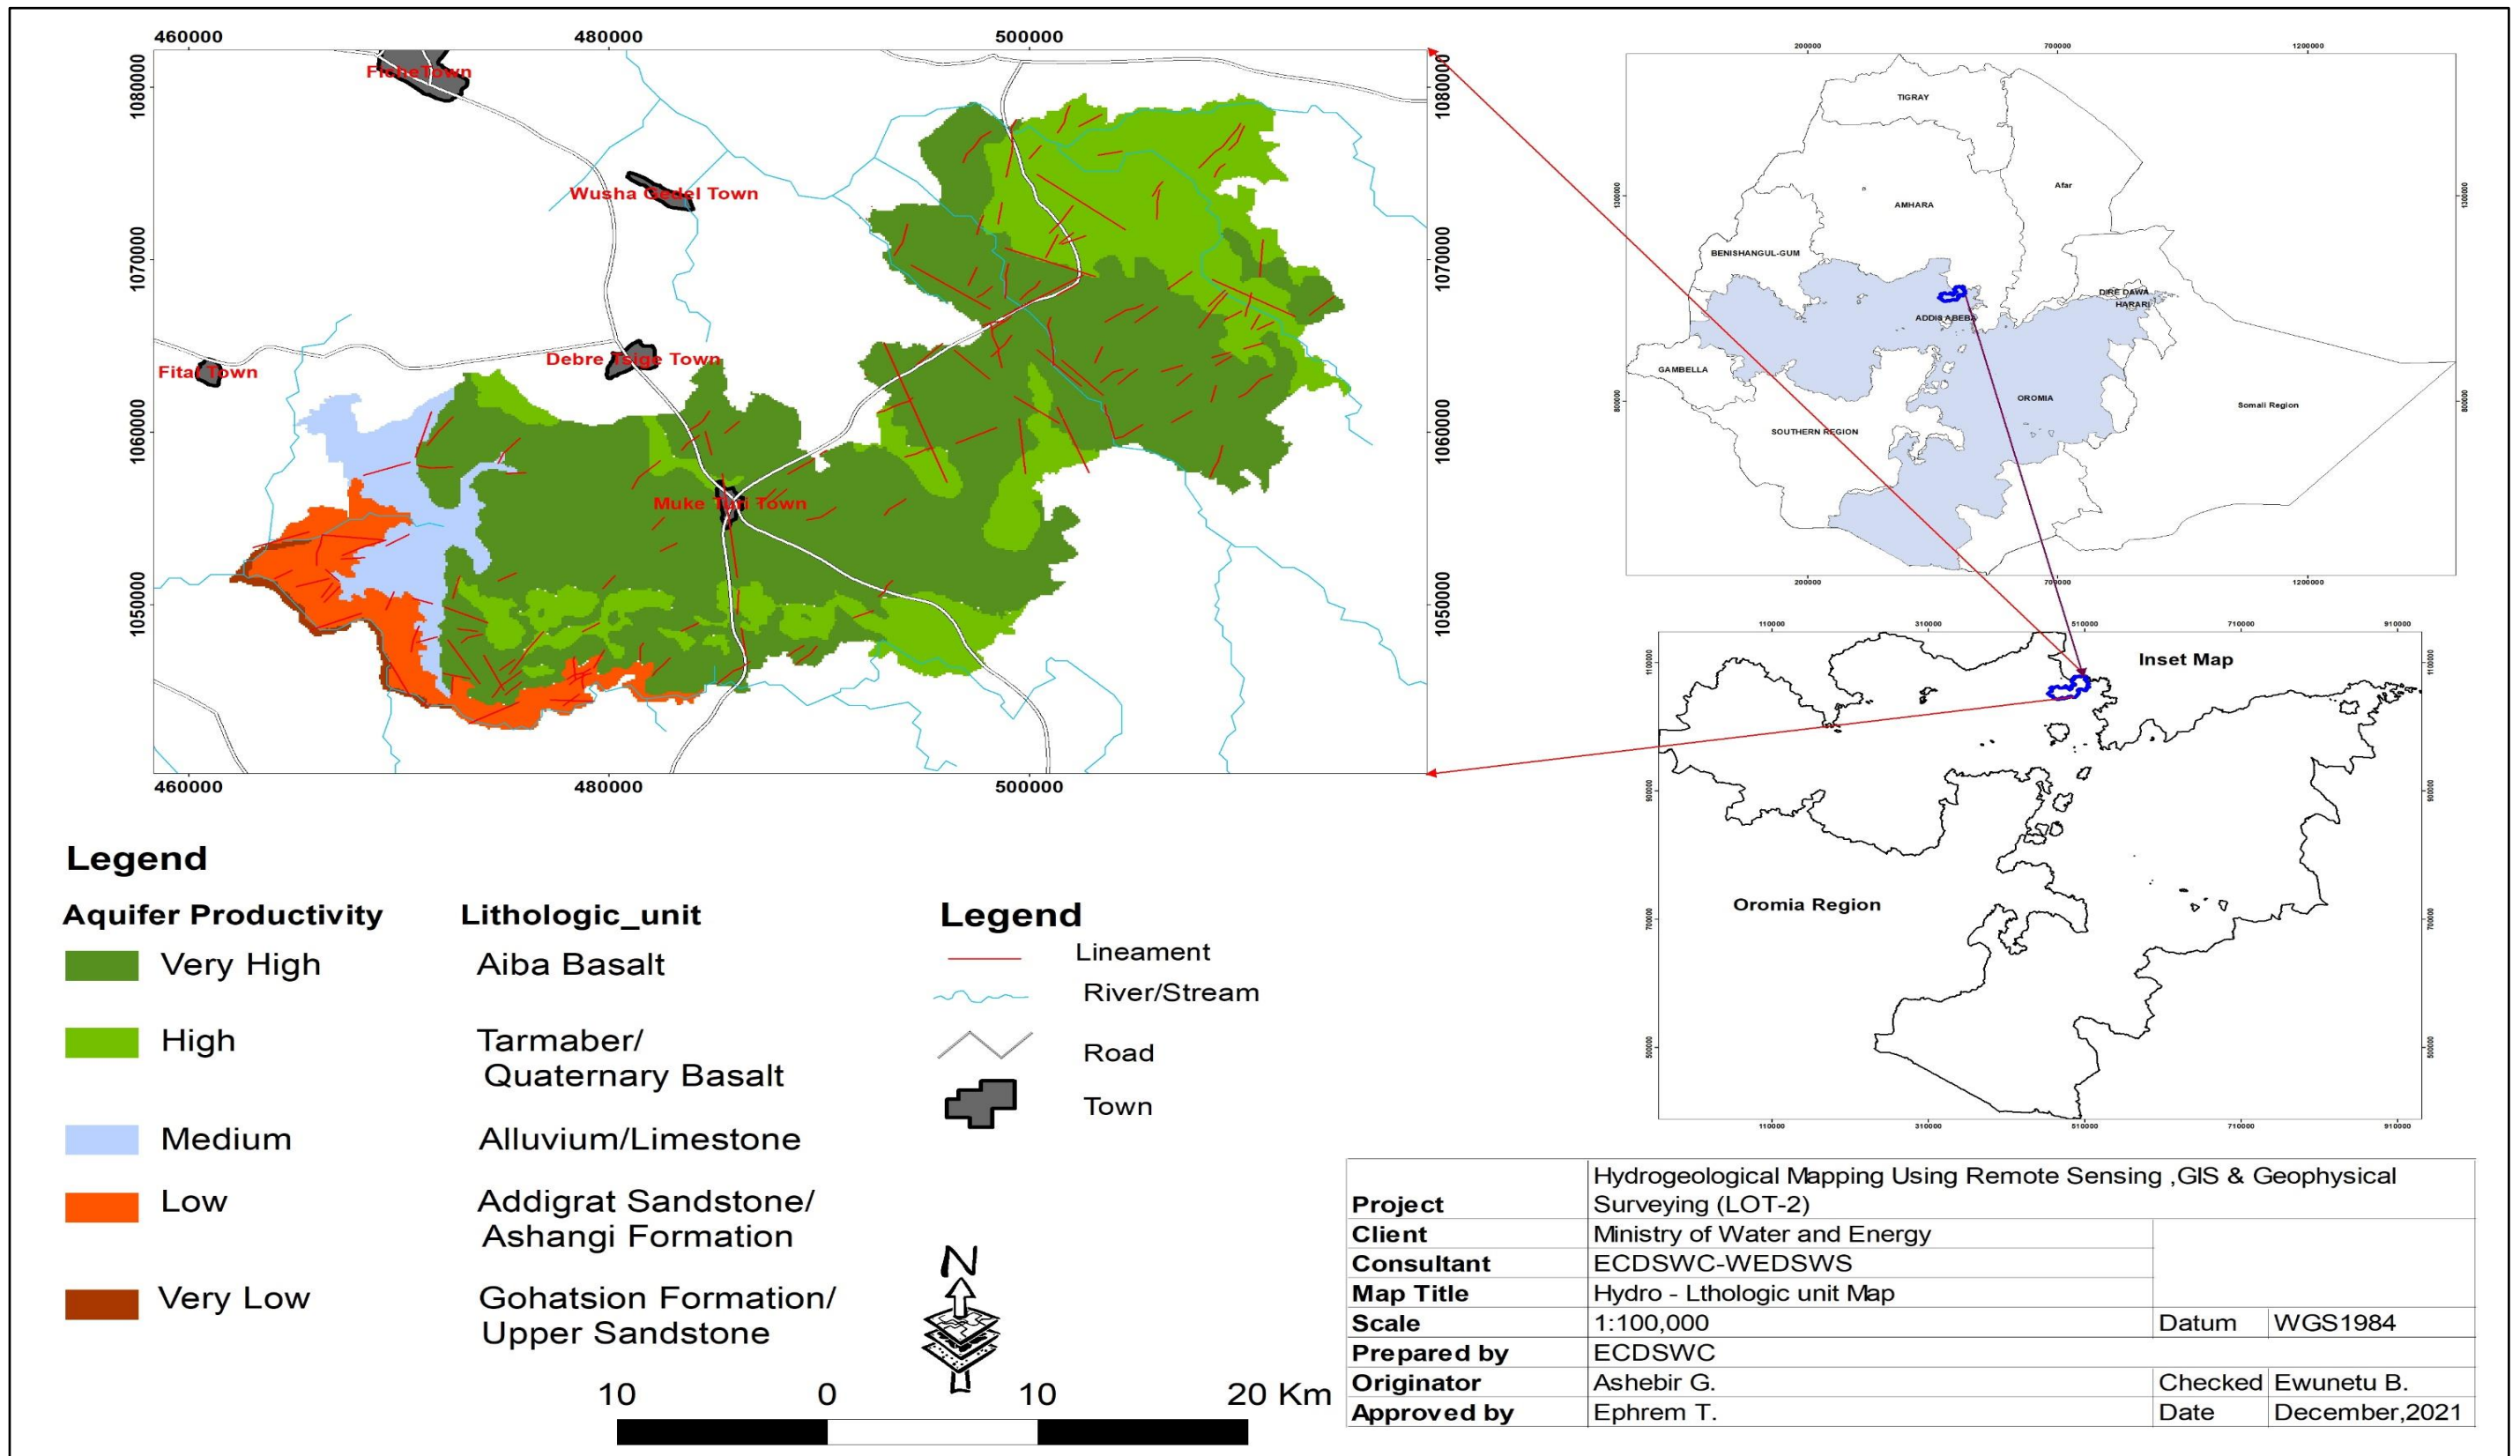


Figure 8: Hydro – Lithologic Unit of Wuchale Wereda

#### 4.2.2 Groundwater Recharge

In this study, Groundwater recharge of Abay basin ( upstream of Weredas in Lot – 2) was calculated by using the WetSpaas model, and then groundwater recharge of the study area was extracted by respective wereda boundary.

The WetSpaas model produces monthly hydrological parameters like grid maps of groundwater recharge, actual evapotranspiration, surface runoff, interception loss, evaporation, etc. In this study, the annual groundwater recharge, annual actual evapotranspiration, and annual surface runoff are calculated from monthly recharge, actual evapotranspiration, and surface runoff by using a raster calculator of ARC GIS 10.8 respectively. A brief description of this output will be presented as a separate document in the phase III water balance study report.

There are different models to estimate recharge in a given area depending on actual areal conditions. In this case, the WetSpaas model estimates monthly long-term spatial distribution amounts of groundwater recharge of Abay basin by subtracting the monthly surface runoff, Interception, and evapotranspiration from the monthly precipitation.

Usually, the recharge areas are in topographic high places; discharge areas are located in topographic low. Using only a topographic setup of the area could not be enough to classify the area as recharge and discharge zones. Land use/land cover, soil types, and morphology of land are equally important in the classification of the area into recharge and discharge zones.

Since recharge is a result of evapotranspiration and surface runoff processes it incorporates all influences and spatial patterns of these processes.

Figures 9 show the yearly groundwater recharge estimated with the WetSpaas model of Wuchale wereda. The recharge estimated was used as one thematic layer for groundwater potential mapping of the Study area The values were reclassified into five categories or classes such as very low, low, moderate, high, and very high by using the natural break classification method. The high weights have been assigned for high groundwater recharge areas and vice versa.



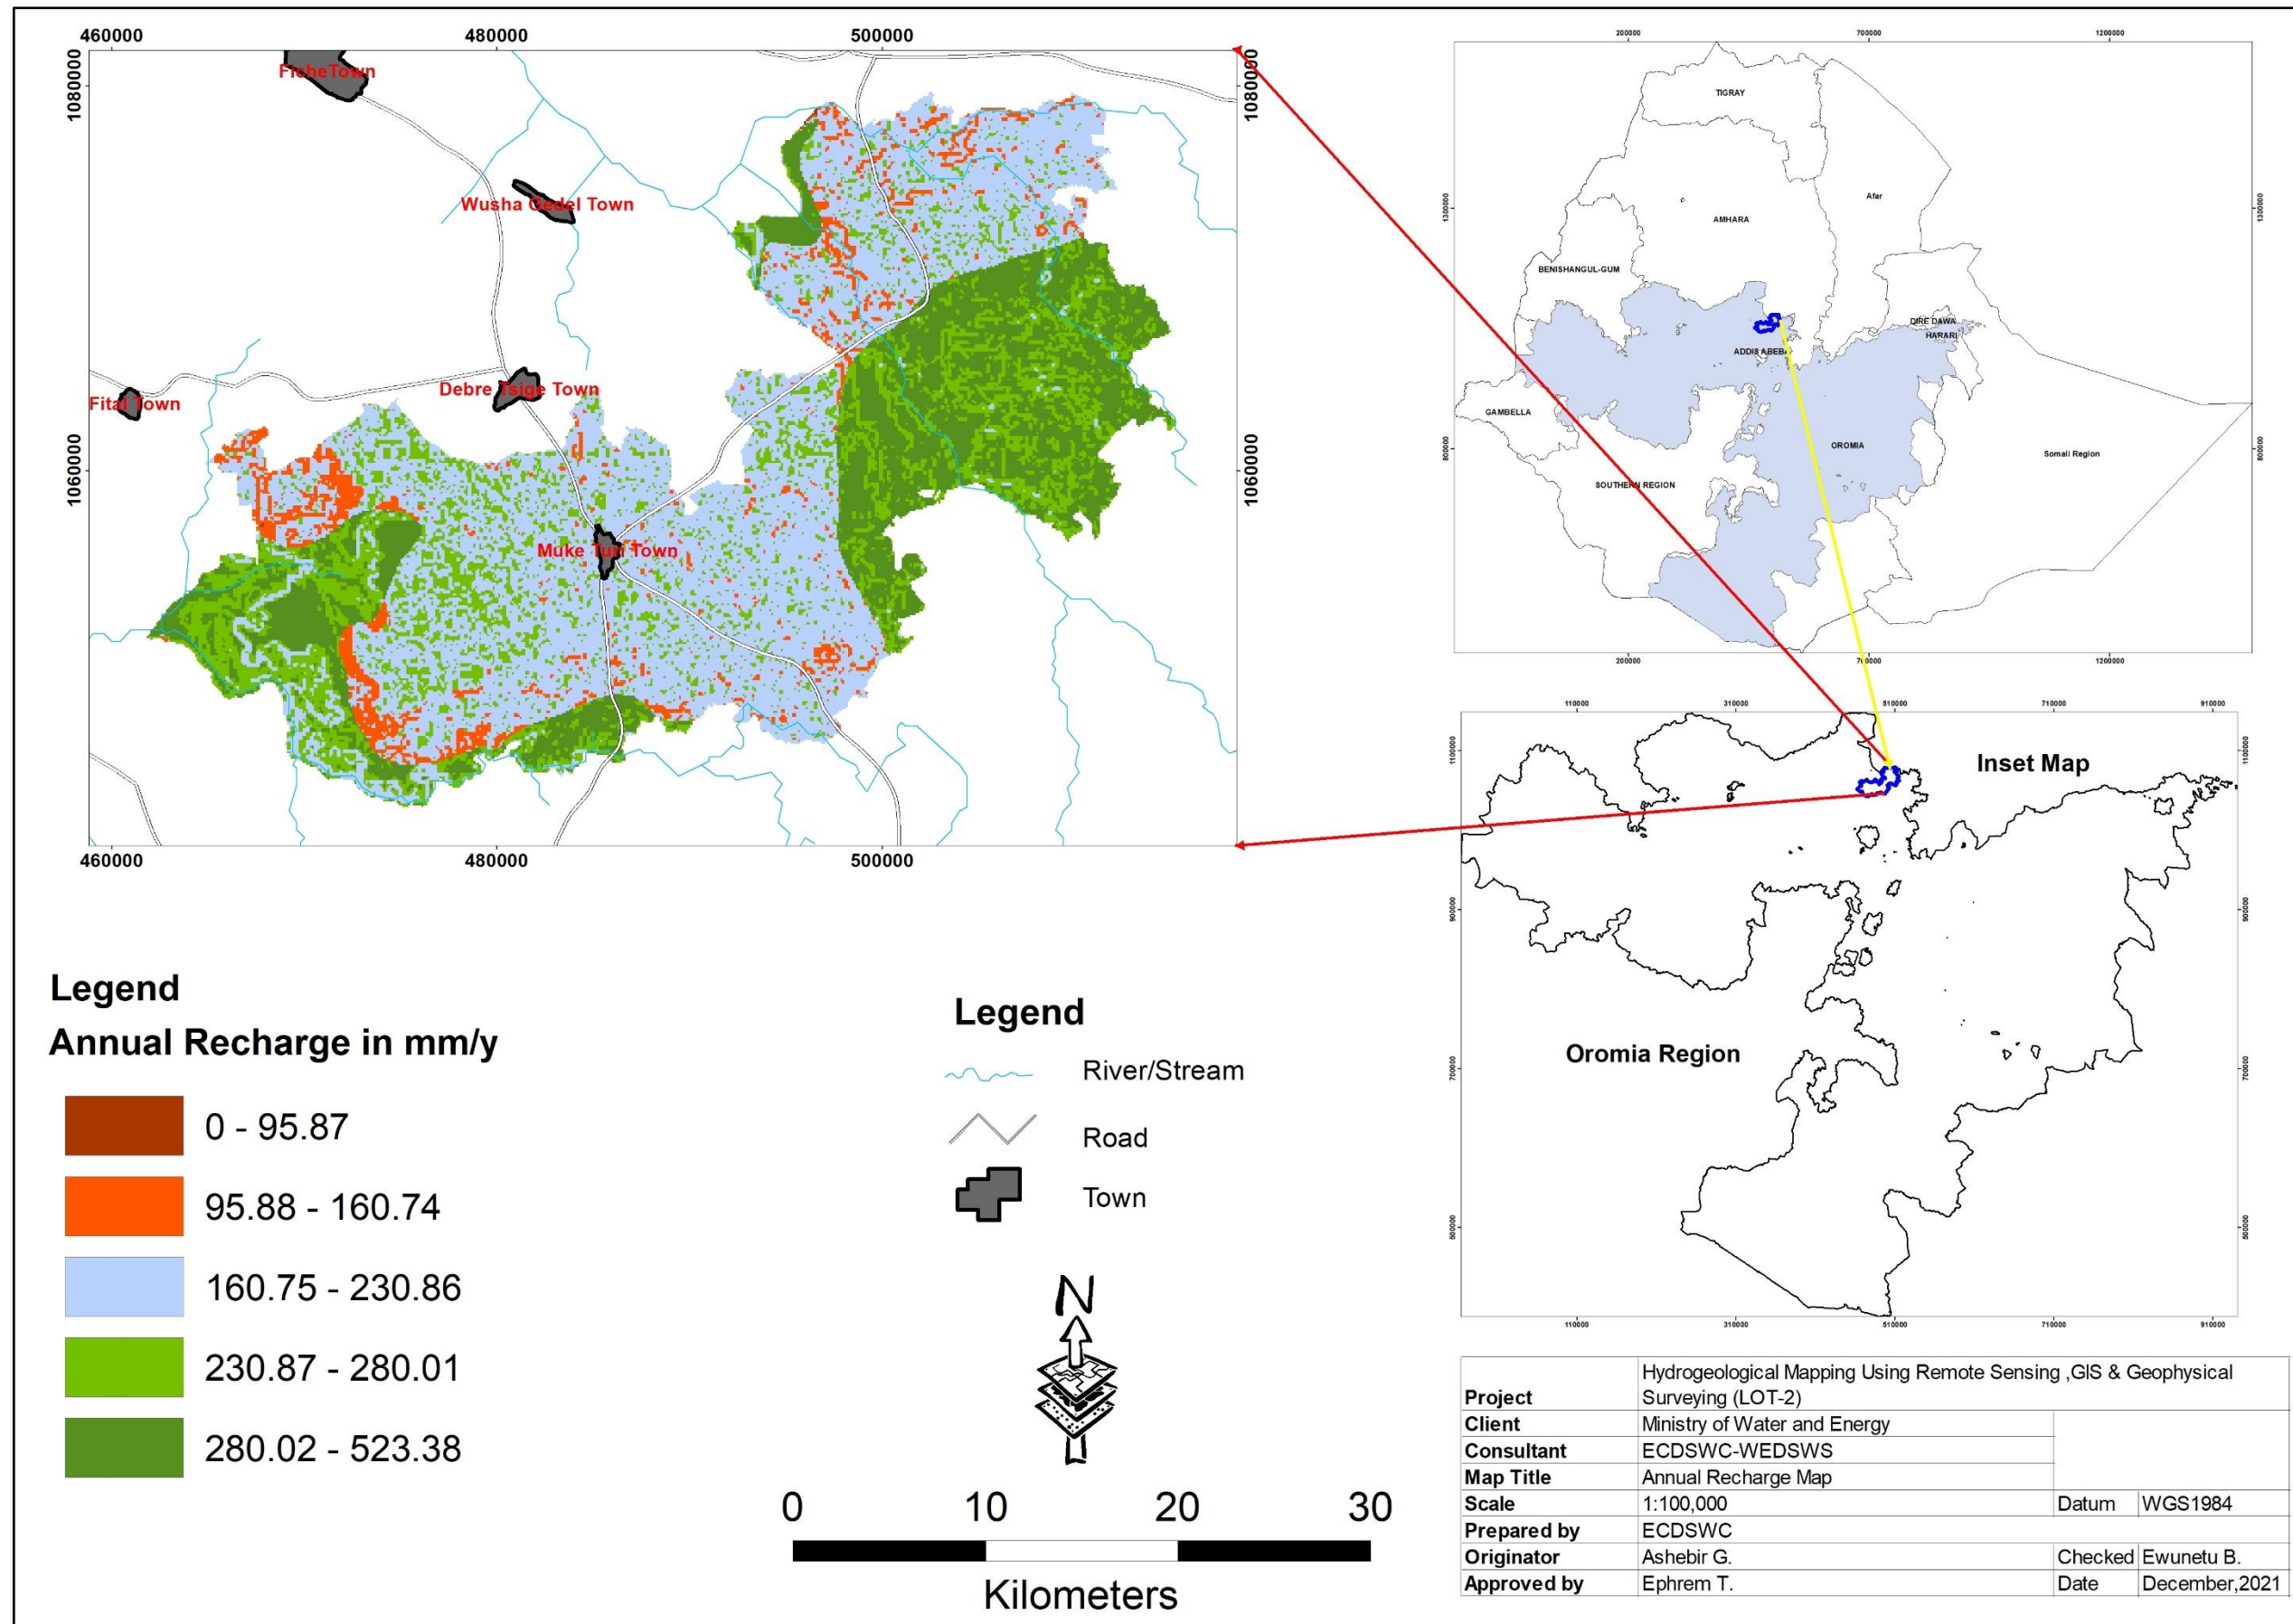


Figure 9 : Groundwater recharge of Wuchale Wereda

### **4.2.3 TWI Thematic layers**

Topographic Wetness Index (TWI) is usually used to compute topographic control on the hydrological process and reflects the potential groundwater infiltration caused by the effect of topography. The values were reclassified into five categories such as very low, low, moderate, high, and very high. The high weights have been assigned for high TWI and vice versa. Figure 10 shows the TWI map of the Wuchale wereda.



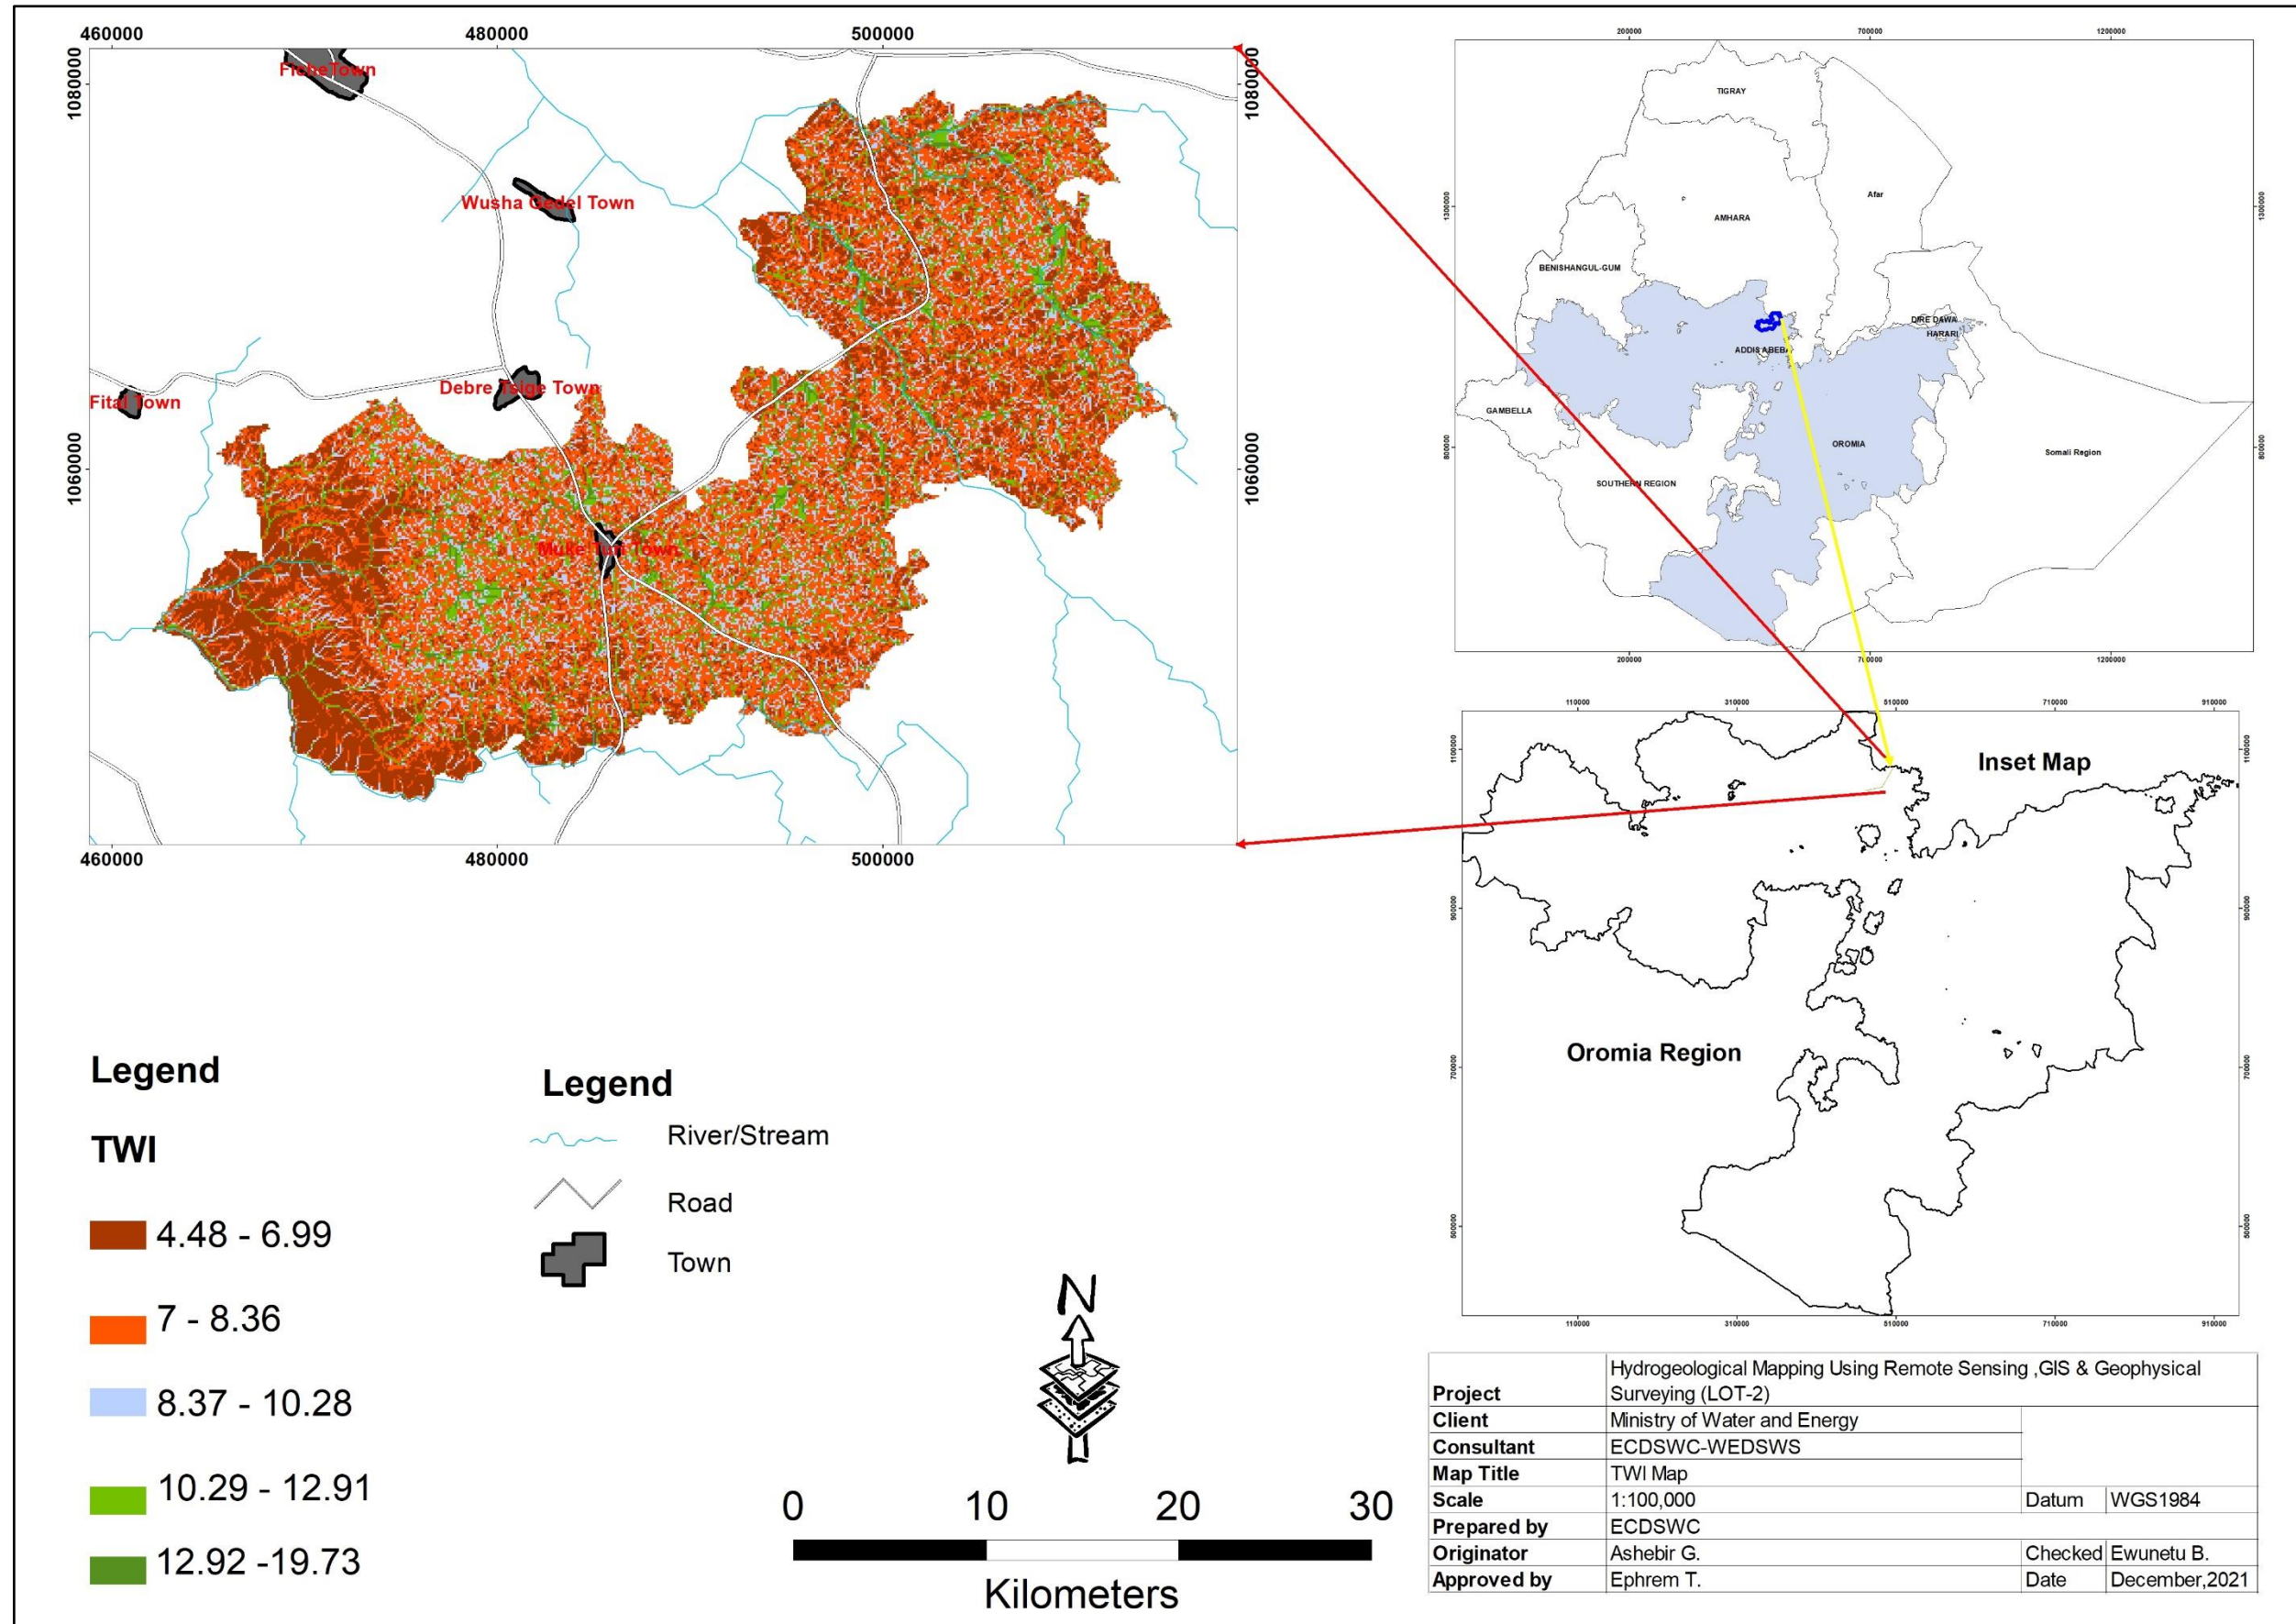


Figure 10 : TWI of Wuchale Wereda

#### **4.2.4 Lineament Density thematic layers**

Like primary porosity, secondary porosity is also essential for the determination of hydrogeological conditions. Lineaments represent secondary porosity and are linear features of tectonic origin. Due to their linear, direct, curvilinear form, they can easily be demarcated in satellite imagery. Some other indications like tone, texture, relief, drainage, and vegetation soil tone's linearity also give valuable information for lineament differentiation.

The groundwater potential is expected to increase with increasing lineament density values. Thus, areas that are characterized by high lineament density values are expected to have high groundwater potential. This is because; lineament acts as conduits for groundwater flow and reservoir for groundwater storage .considering lineament map as a baseline, lineament density is defined as the total length of the lineament per unit area.

The lineament density of the Wuchale Wereda was classified into five classes, in decreasing order of their relative infiltration capability. These classes were: 5, 4, 3, 2, and 1, representing very high, high, medium, low, and very low density, respectively (figure11)

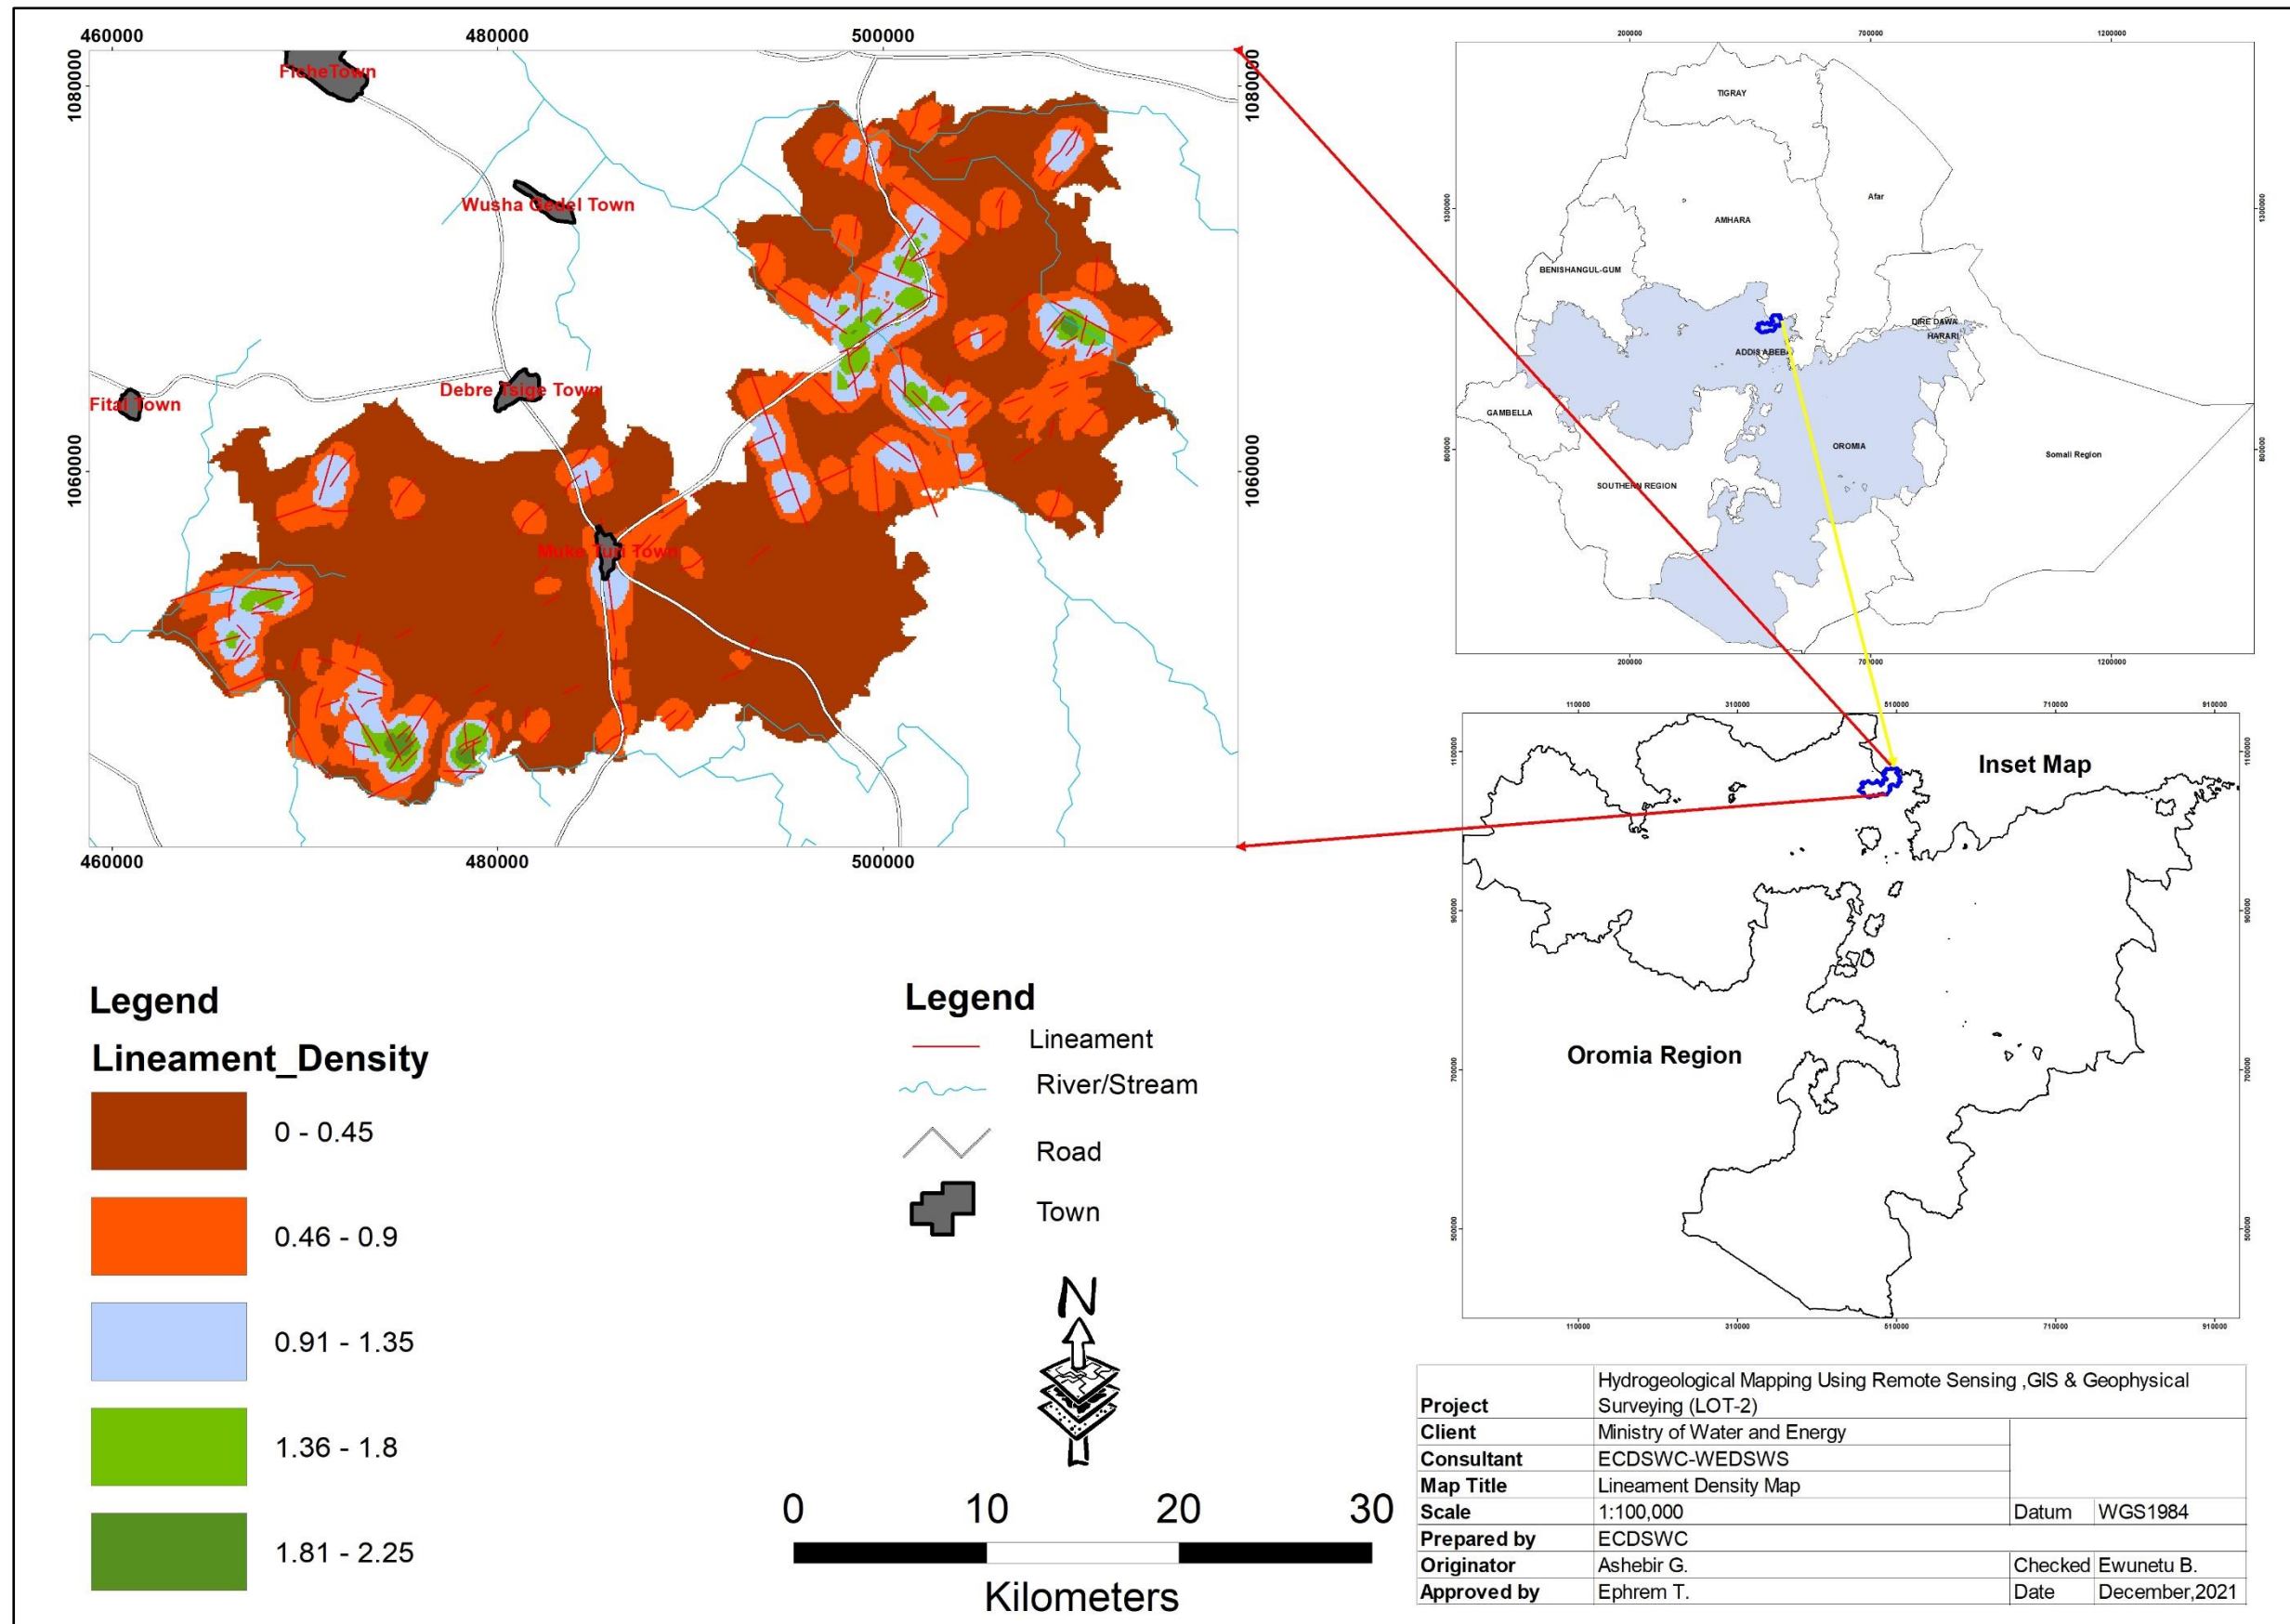


Figure 11: Lineament Density map of Wuchale wereda

#### **4.2.5 Lineament Proximity thematic layers**

There is a close relationship between lineament proximity and groundwater potential. Thus, the intensity of groundwater potential decreases with increasing distance from the lineaments and increases with decreasing distance from the lineament. The proximity from the lineament was derived by creating buffers based on conceptual understanding of the specific Study area. High weights are assigned to the areas nearby the lineament and low weights to distance locations. The proximity from the lineament map is shown in figure 12.



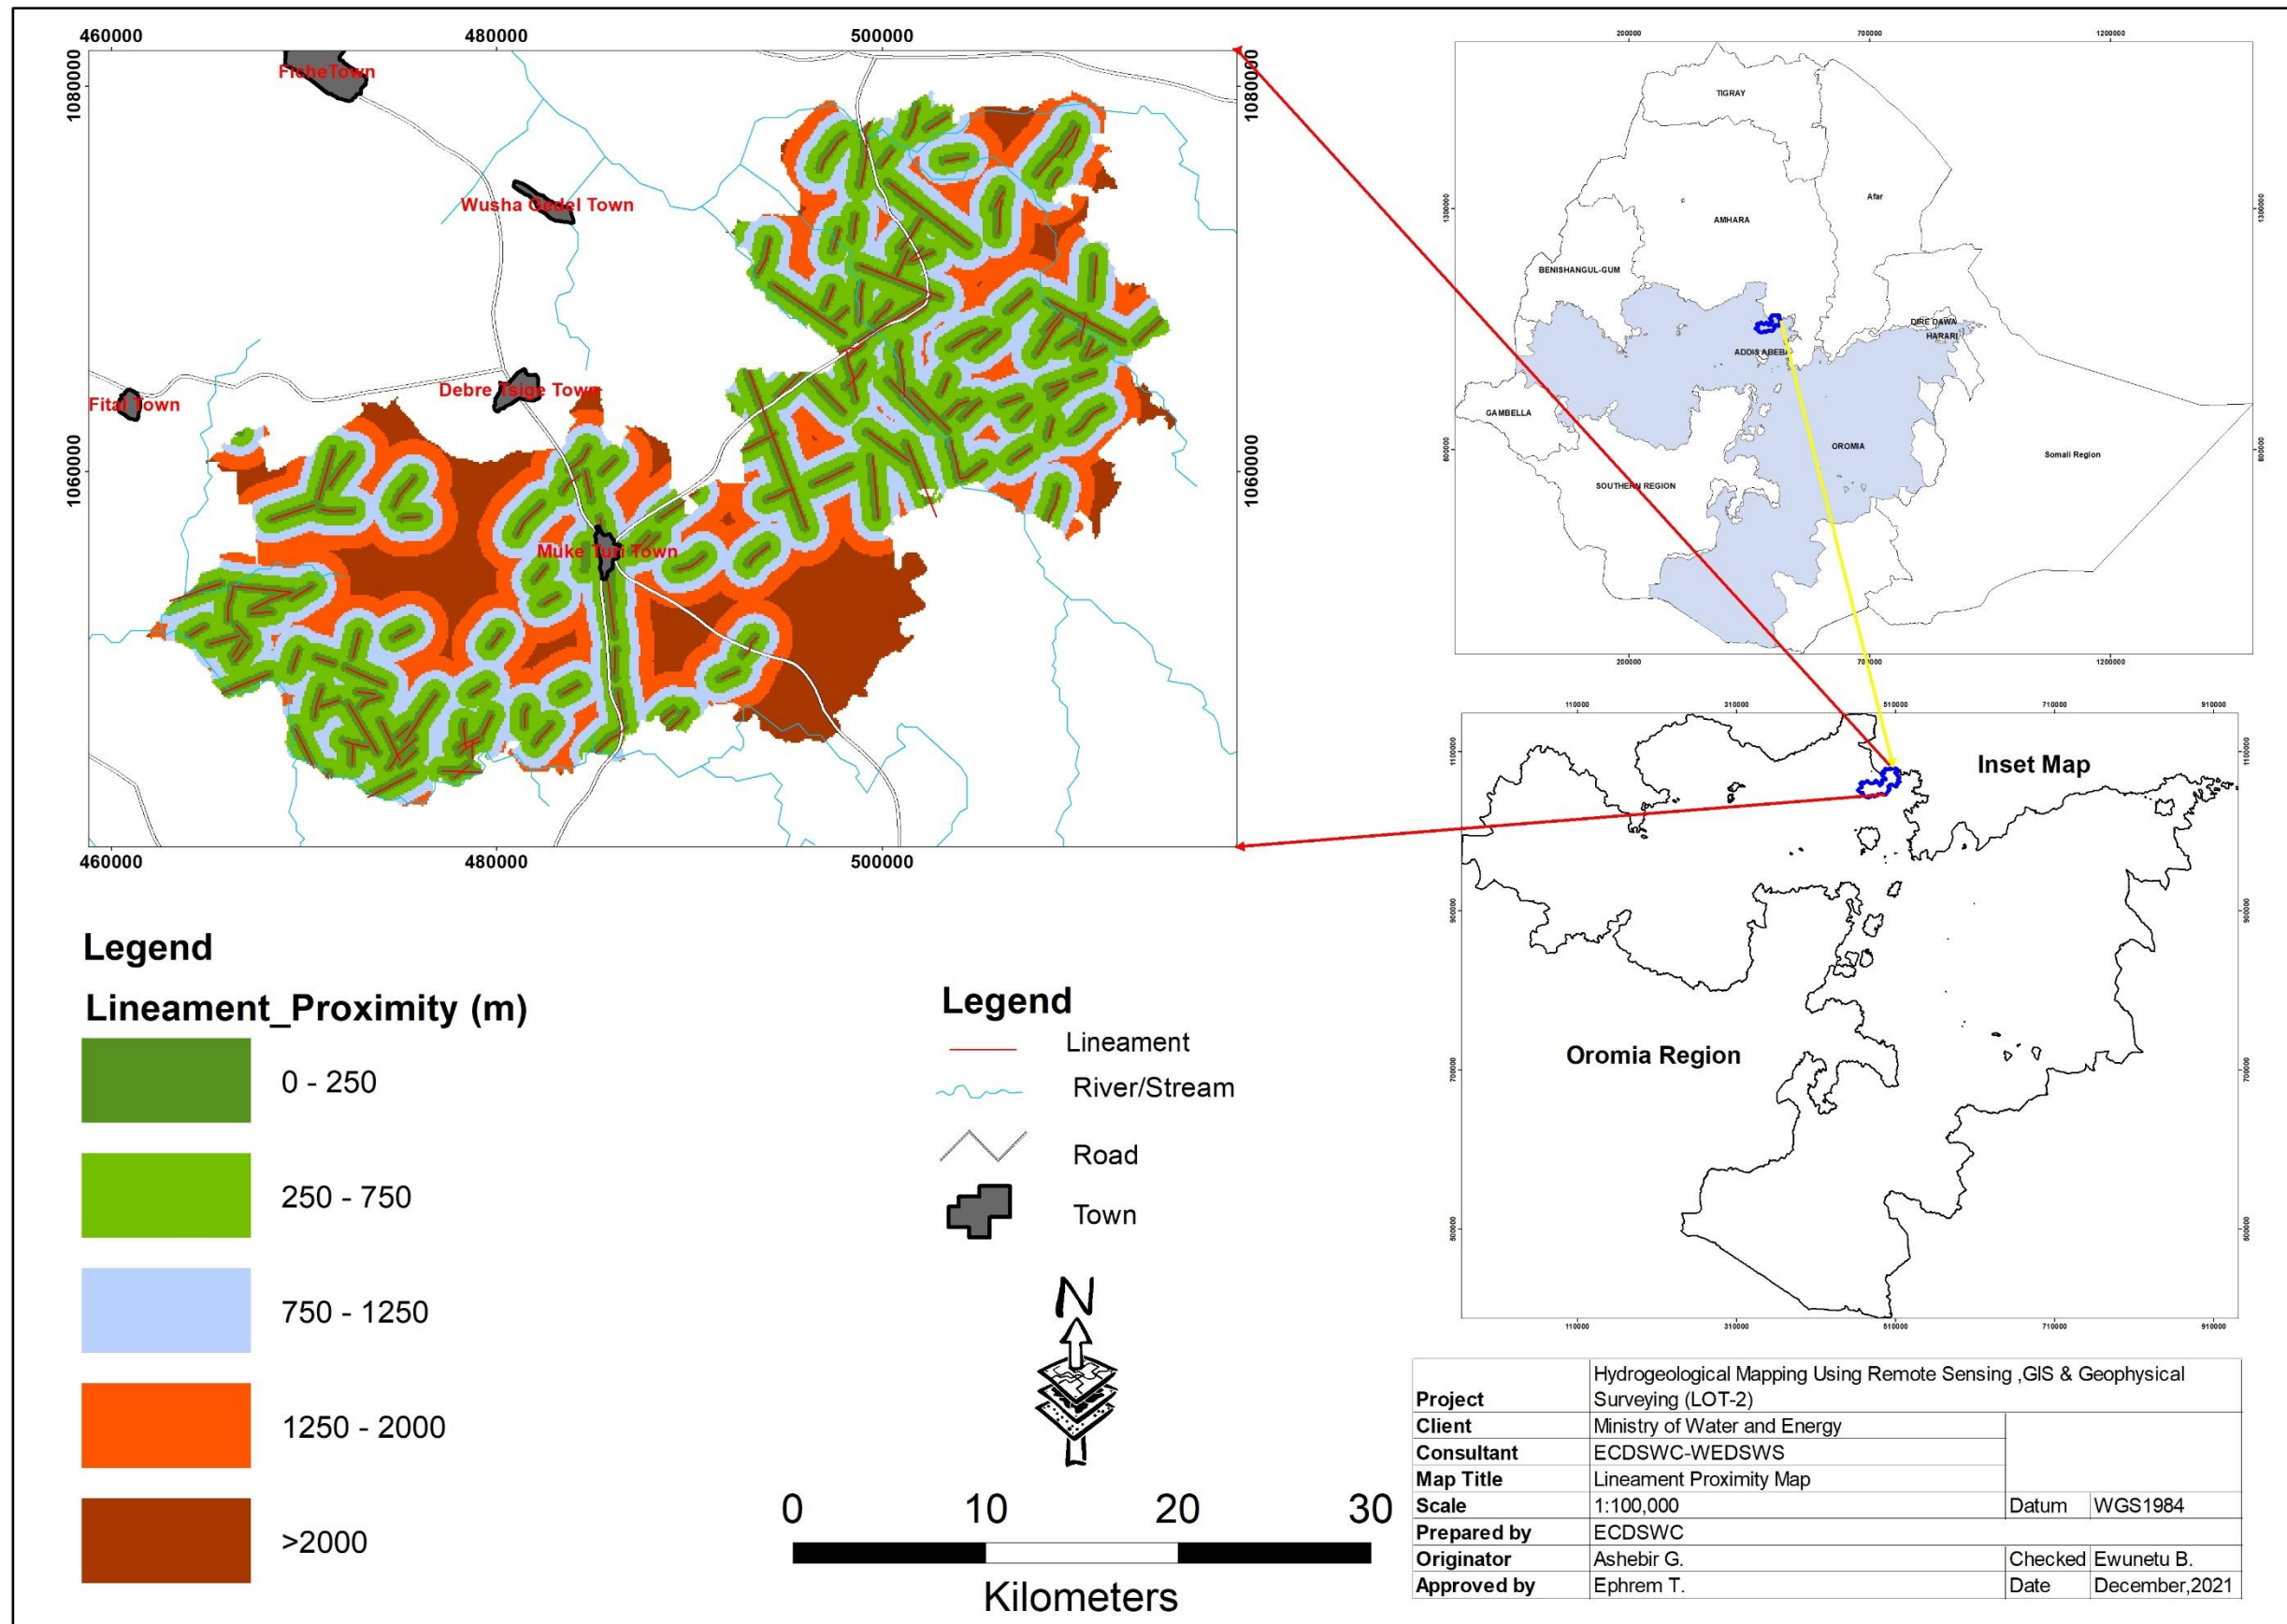


Figure 12 : Lineament Proximity Map of Wuchale wereda

### 4.3 Overlay analysis

All five thematic layer maps were integrated using ArcGIS 10.8 using the weighted overlay method in the GIS environment to produce the groundwater potential map of the Study area. The following formula was used to estimate the groundwater potential map of the Study area

$$GWP = \sum_{i=1}^n w_i x_i \text{-----Eq.7}$$

Where GWP = groundwater potential,  $W_i$  = weight for each thematic layer, and  $X_i$  = is the ranking of a thematic layer

### 4.4 Sensitivity analysis

Sensitivity analysis provides important information related to the influence of assigned weights to each thematic layer on the output GWP map. It can indicate which layer is the most / least significant in determining the output map. Hence, single parameter (Napolitano and Fabbri 19996) sensitivity analyses were carried out to justify the influence of thematic layers on the GWP map

The Single – parameter method examines the impact of each thematic layer on the GWP map. This test compares the “effective “or “real” weight for each of the thematic layers with the “Empirical” weight assigned to the same layer in the GWP map. For each thematic layer, the effective weights were calculated using equation (8):

$$W = \frac{PrPw}{GWP} * 100 \text{-----Eq.8}$$

Where W is the effective weight of each thematic layer

Pr and Pw are the rates and weight values of each thematic layer

GWP is the groundwater potential map generated using all the thematic layers.

#### 4.4.1 Single parameter Sensitivity analysis of Wuchale wereda

The statistics of the single-parameter sensitivity analysis of Wuchale Wereda are shown in Table 10. There are some deviations in the effective weights when compared to the empirical weights. The single–parameter analysis of Wuchale Wereda shows Lithologic units as the most effective layer in GWP mapping with mean effective weights of 56.8%.The TWI and Lineament density tend to be less effective thematic layers with mean effective weightings of 9.3% and 3.4% respectively compared with their empirical weights of 11.9% and 4.6%. The values of mean effective and empirical weight are close to each other for groundwater recharge and Lineament proximity layers.



Table 10: Effective weight of single parameter sensitivity analyses of Wuchale wereda

<b>The effective weight of Single parameter Sensitivity analysis of Wuchale wereda</b>					
<b>Effective Weight (%)</b>					
	<b>Empirical Weight (%)</b>	<b>Min</b>	<b>Mean</b>	<b>Max</b>	<b>SD</b>
Lithology	30.7	43.6	56.8	68.7	0.9
Recharge	25.1	19.0	25.3	31.8	2.3
TWI	11.9	7.9	9.3	10.8	0.4
LD	4.6	2.8	3.4	4.0	0.9
LP	4.5	4.2	4.7	5.3	0.3

## 4.5 Validation using well data

### Introduction

Overlay analysis techniques based on GIS methods have been applied to evaluate the groundwater potential of Wuchale Wereda. The technique involves setting overlay criteria for the five thematic layers (Lithology, recharge, lineaments density, lineaments proximity, and TWI) by using AHP methods. Layer weights and class have been established based on the developed conceptual model, hydrogeological setup of this wereda, and analysis of previously conducted works. The final output of the work is the production of a groundwater potential map for Wuchale wereda classified as very high, high, moderate, low, and very low to demarcate target areas for further detailed hydrogeological and geophysical investigations.

Before proceeding to detail hydrogeological and geophysical investigations, the output of the overlay analysis needs to be validated. In order to validate the overlay analysis results (GWP map), ground-truthing work has been conducted for Wuchale wereda.

To validate the result of overlay analysis, ground-truthing of the work is conducted by comparing it with local and regional hydrogeological and geomorphological conditions and also previously drilled shallow and deep wells. In order to validate produced groundwater potential map, the following steps are followed. Geological and hydrogeological observations

- Regional and local geomorphological settings observation
- Verifications of groundwater potential map with series of ground control
- Water point inventory and comparison of inventoried boreholes characteristics with groundwater potential map
- Checking groundwater potential map produced with general ground conditions

### Wuchale wereda

The groundwater potential map of Wuchale wereda is classified as very low, low, moderate, high, and very high groundwater potential area. Topographical, Wuchale wereda plain land except for the western and southwestern part of the study which is bounded by Muger gorge. The main lithologic unit exposed in the study area is Aiba basalt, Tarmaber basalt, Ashangi basalt, and alluvial formation as very high to low productivity aquifers.

Most of Wuchale wereda areas mapped as moderate to high groundwater potential zones are plain land with moderate groundwater recharge, moderate runoff potential characteristics, and high ability of aquifers (Aiba, Tarmaber basalt, and Alluvial aquifers ) to store and convey groundwater through interconnected secondary and primary porosity which is exposed in the

major part of the study area. Whereas areas delineated as very low and low groundwater potential is in deep gorge due to unfavorable topographic situation and low storage and transmissivity potential of the exposed Ashangi basalt in the study area.

A total of 10 wells were used for validation, the 9 wells yield values agree with the groundwater potential zone map of Wuchale wereda which fell within moderate to high potential zone. While the other well which fell within the high potential zone map has very high groundwater potential.

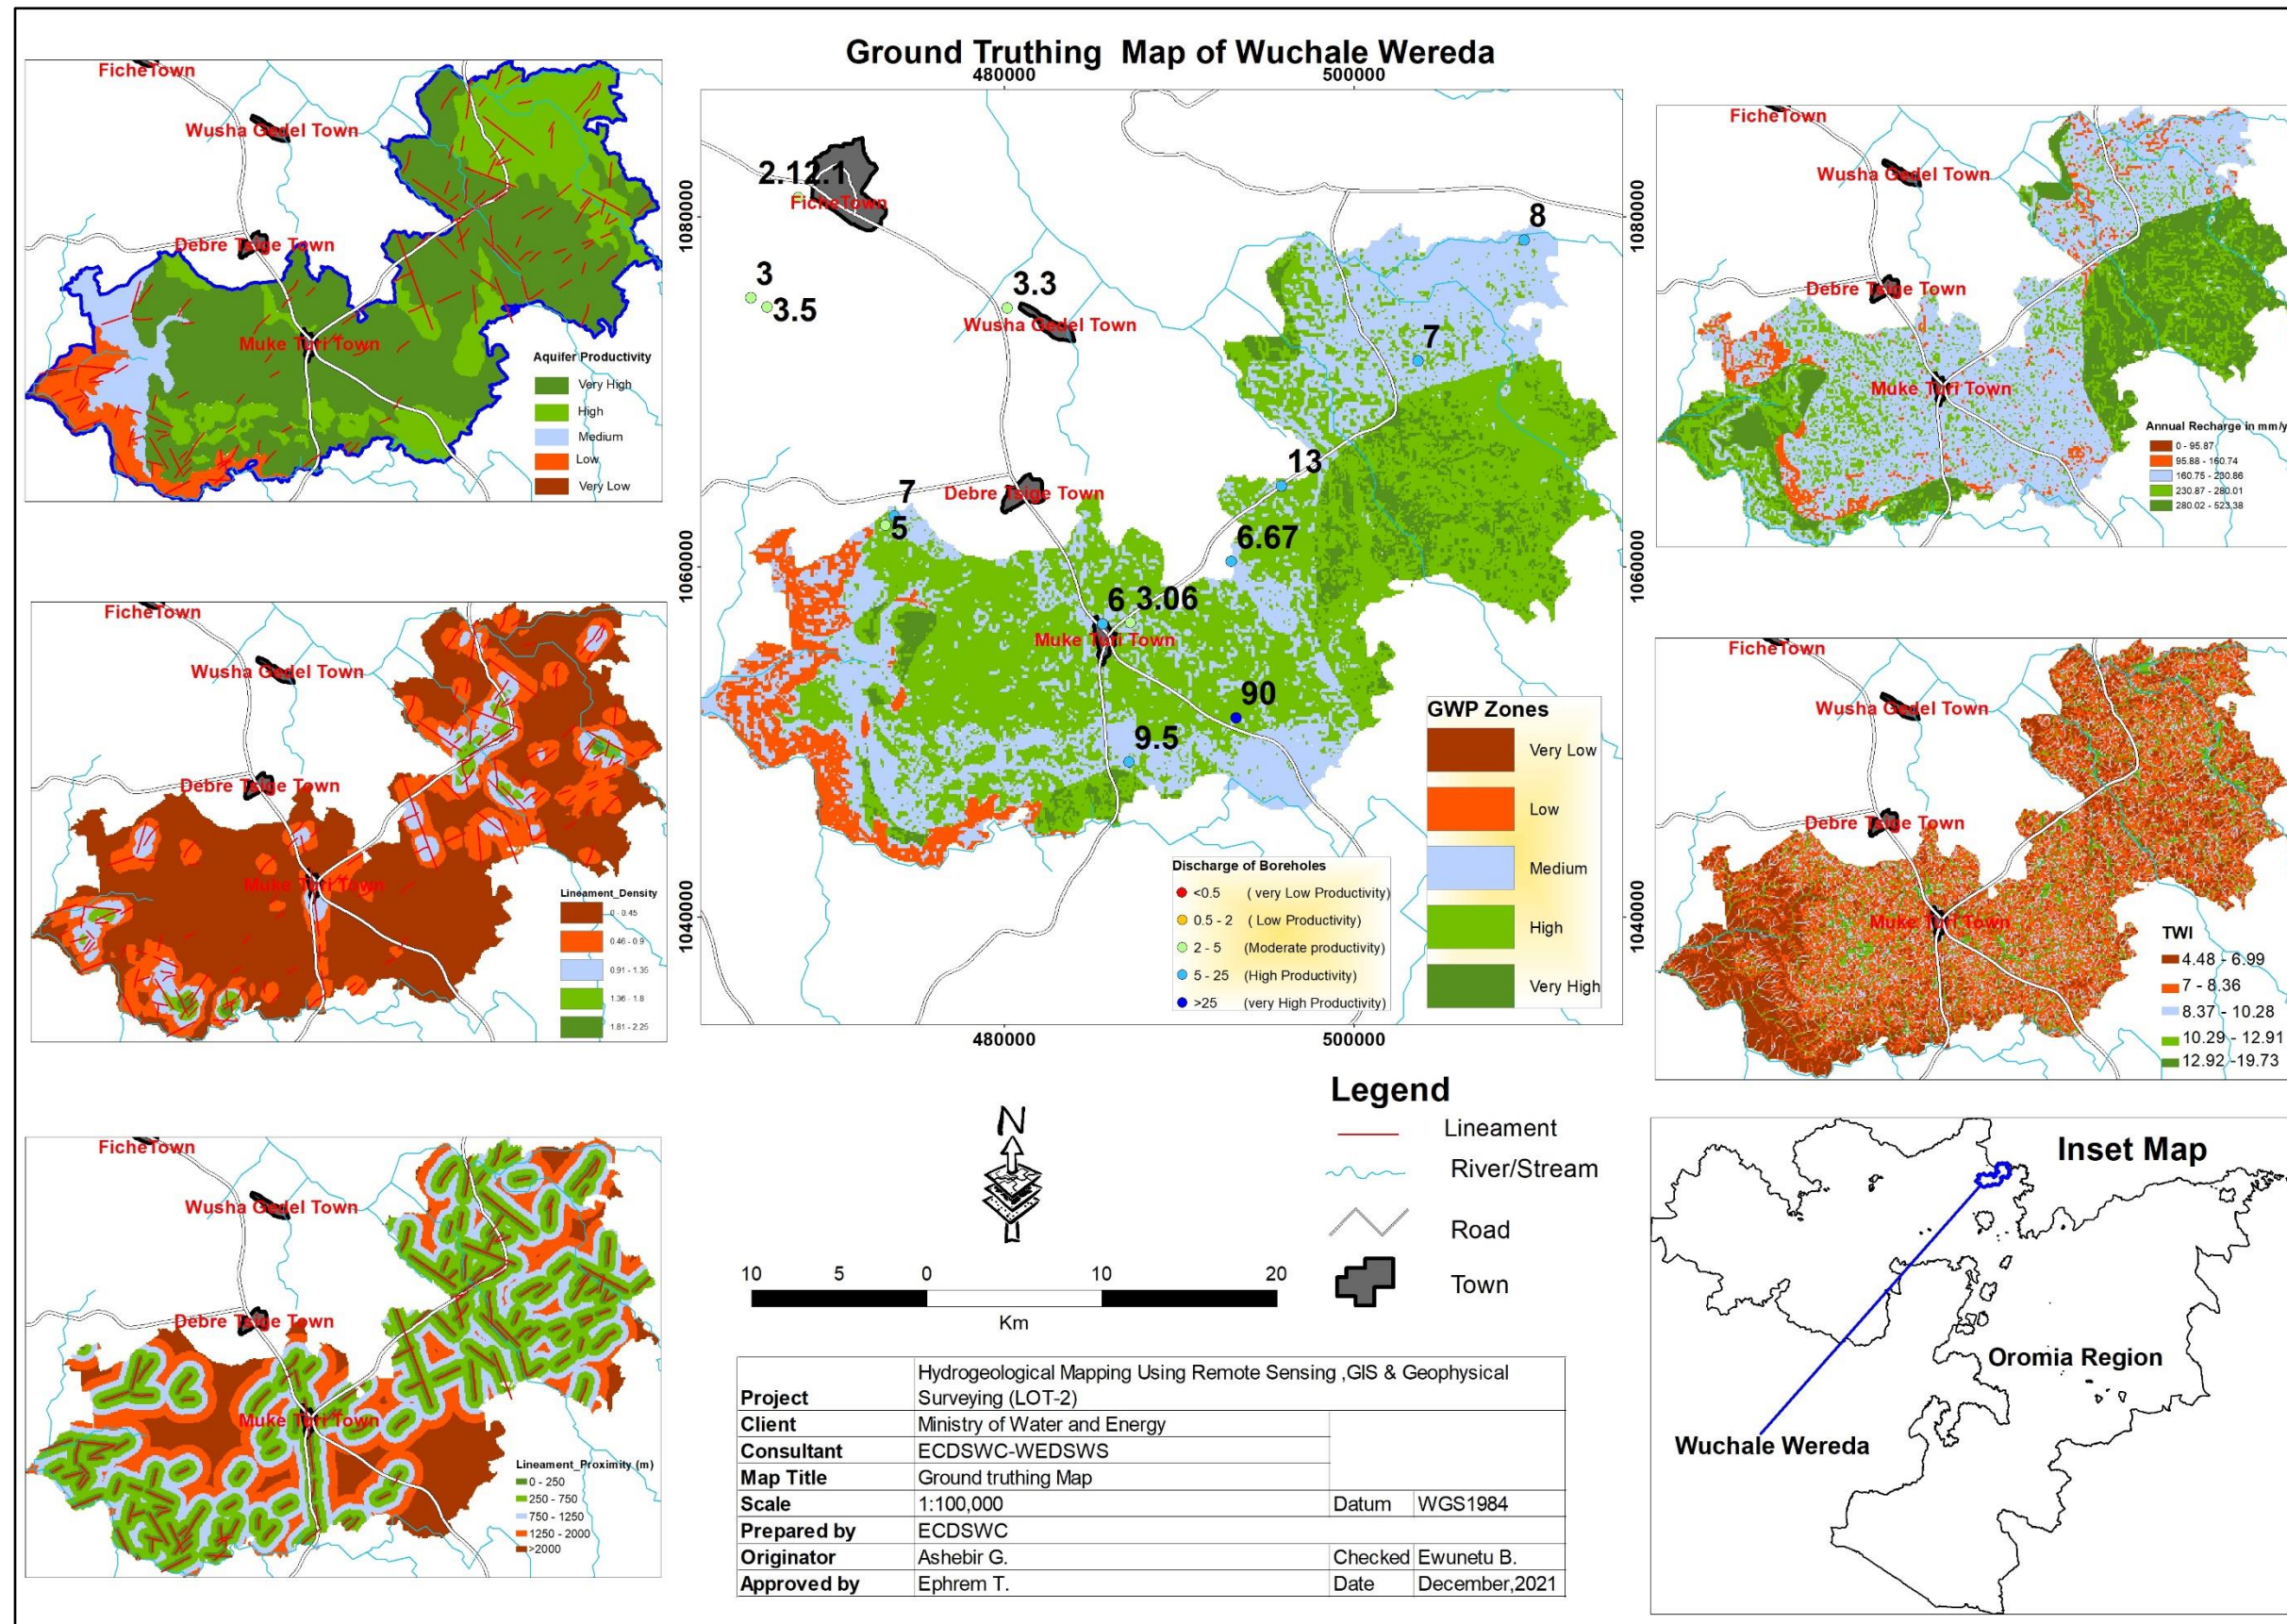


Figure 13 : Groundwater potential truthing of Wuchale wereda



#### 4. 6. Socio - Economy and water demand of Wuchale wereda

To estimate the water demand of the Wuchale Wereda CSA projected population data of July 2021 is used. As per the GTP-2 (2016-2020) water supply service level standard, it is required to provide safe water in a minimum of 25 l/c/day within a distance of 1 km for rural areas while in urban areas it is required to provide safe water in a minimum of 100 l/c/day for category 1 towns/cities (towns/cities with a population more than 1 million), 80 l/c/day for category 2 towns/cities (towns/cities with a population in the range of 100,000-1million), 60 l/c/day for category 3 towns/cities (towns/cities with a population in the range of 50,000 -100,000), 50 l/c/day for category 4 towns/cities (towns/cities with a population in the range of 20,000-50,000) up to the premises, and 40 l/c/day for category-5 towns/cities (towns/cities with a population less than 20,000) within a distance of 250m.

The water demand of the Wuchale wereda for water supply of small-town, livestock & rural water supplies water demand are summarized in the table below.

##### 4.6.1 water demand of Wuchale Wereda

year	Wuchale Wereda	
	Wuchale Rural AVG water Demand m3/day	Muke Turi town AVG water Demand m3/day
2021	3974	1721
2025	4564	1976
2030	5300	2295
2035	6051	2620

Wereda	Livestock Category											Water Demand in m3/day
	Shoats	0.01	Cattle	0.7	Camel	1	Donkey	0.6	Chicken	0.001	TLU	
Wuchale	92654	926.54	182513	127759.1	0	0	62048	37228.8	60741	60.741	165914.44	4,148

**Note:** Ethiopia is home to about 35 million tropical livestock units (TLU), and on average, one TLU requires about 25 liters of water per day, Ethiopia Agriculture research organization (EARO)

### 4.7 Groundwater potential zone (GWPZ)

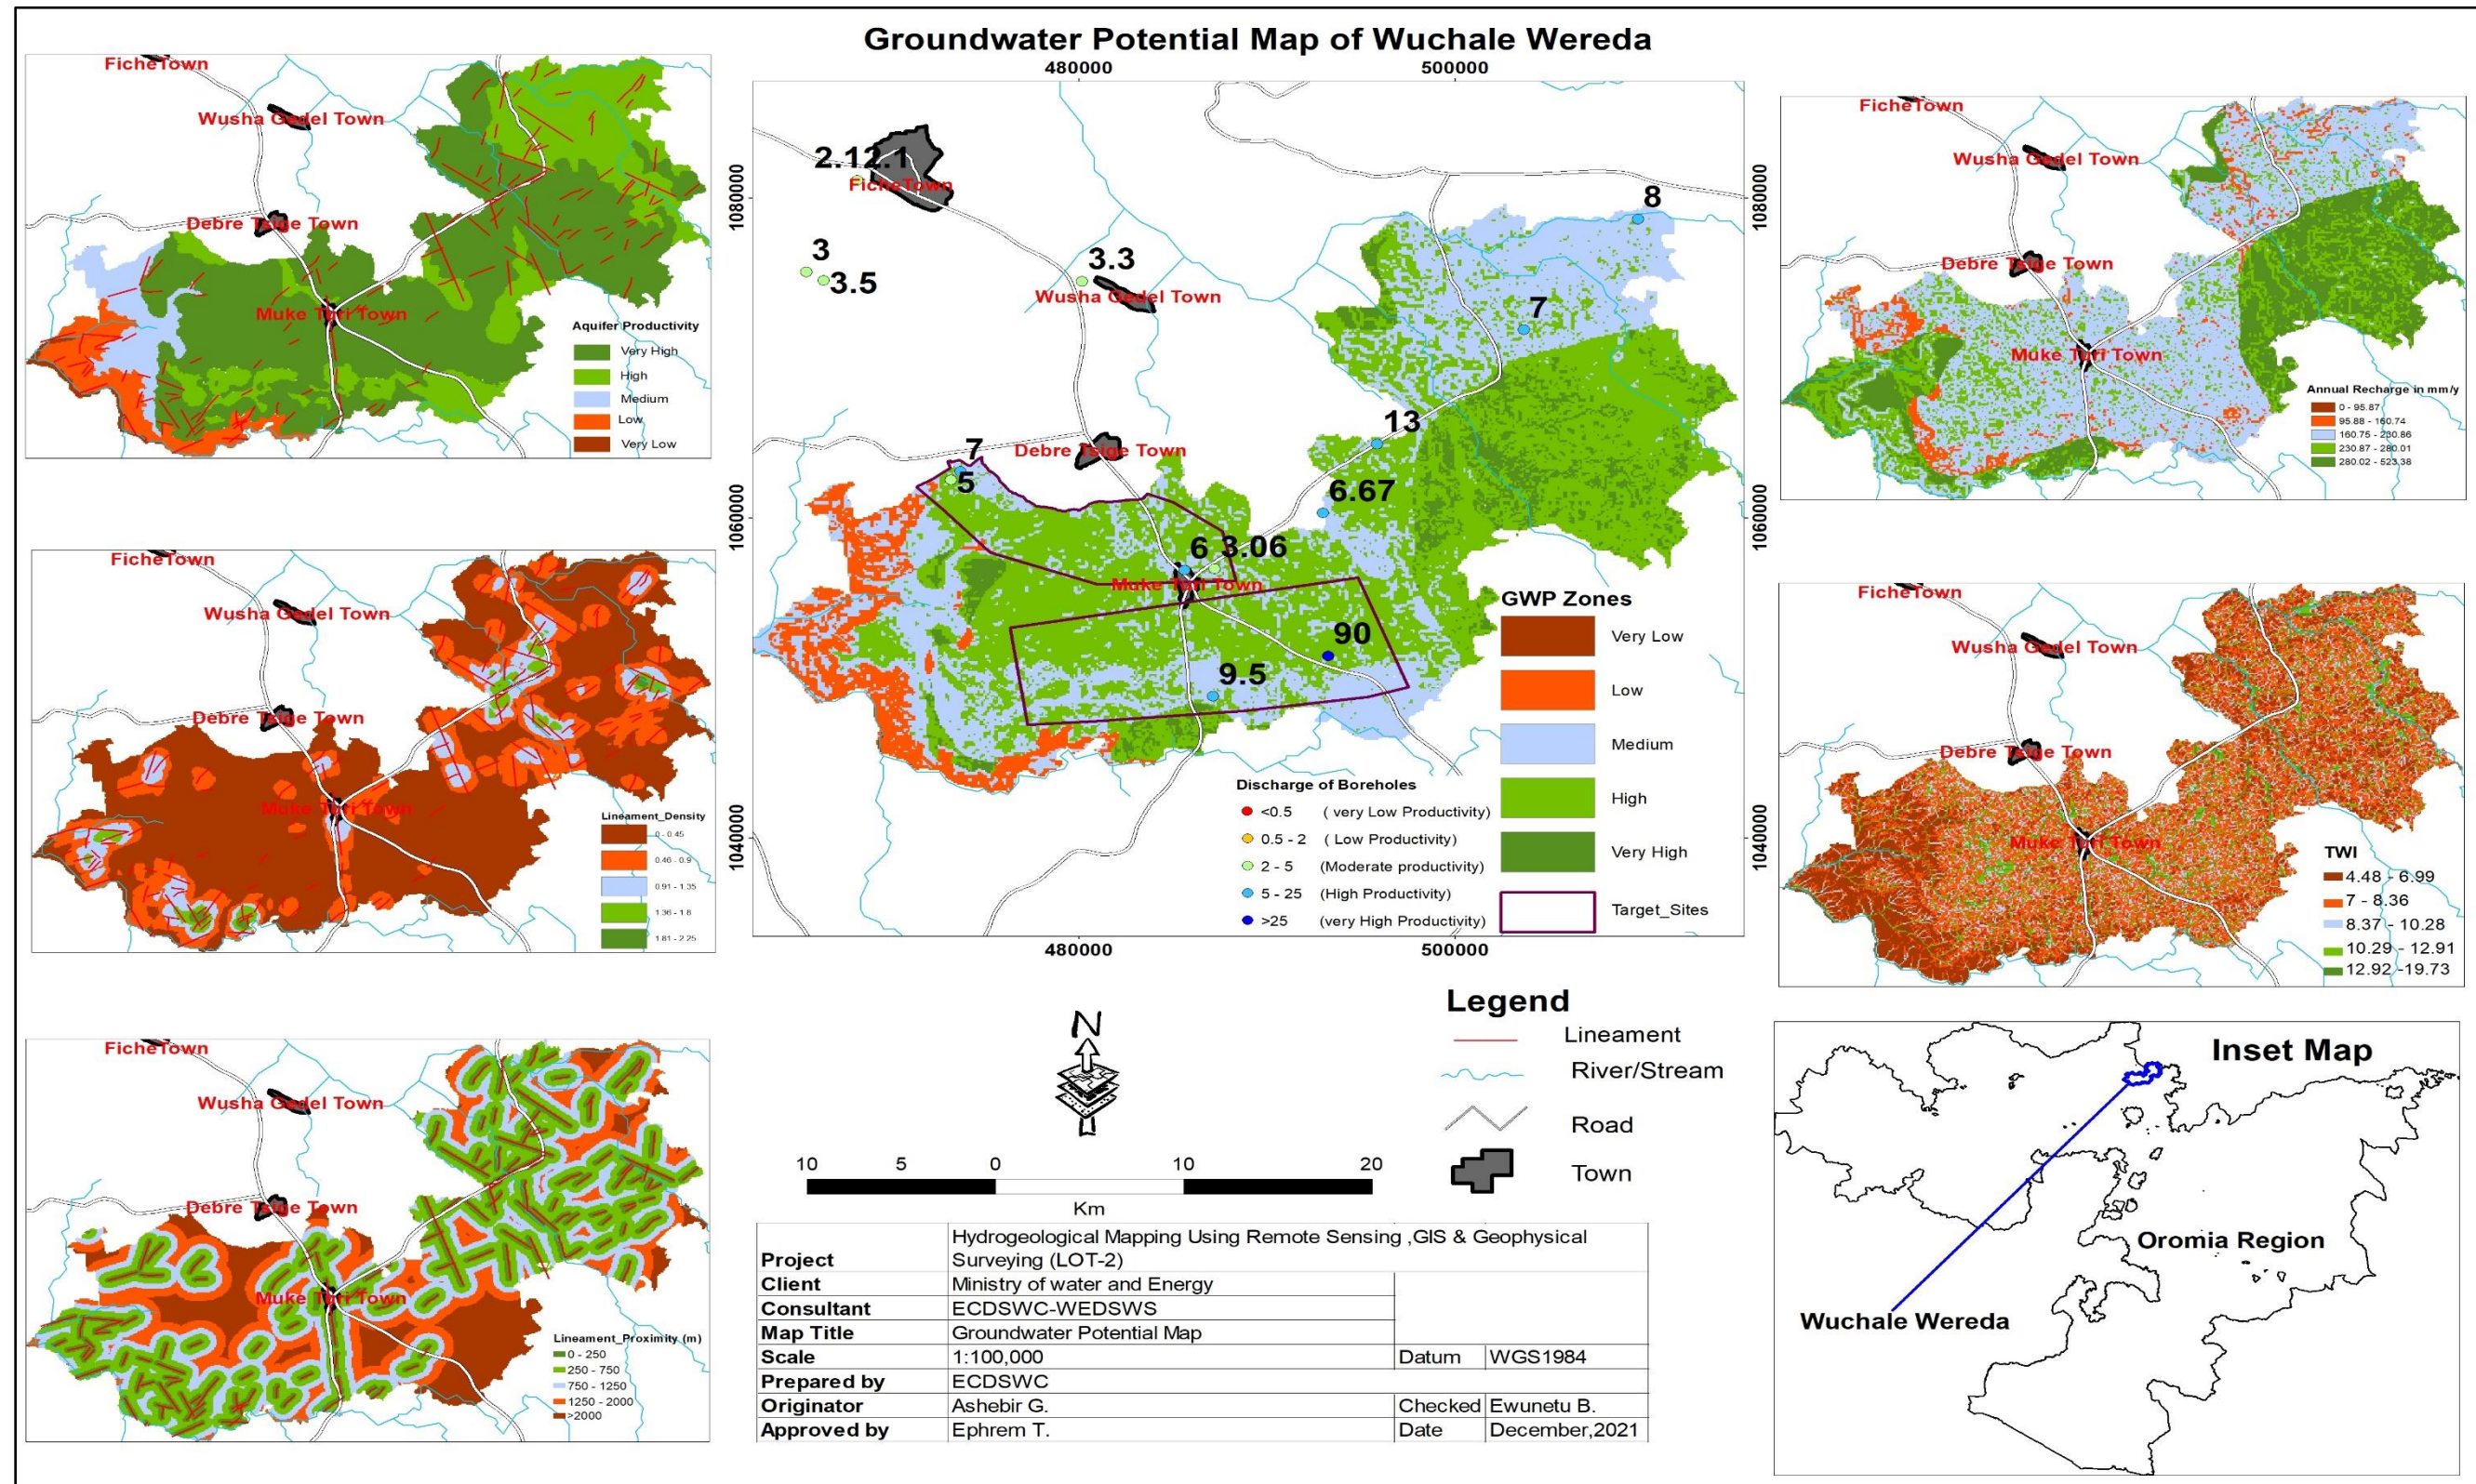


Figure 14: GWP map Wuchale Wereda



## 5. Revised work plan for the phase – III

The Revised Work Programs for Phase III is prepared considering the remaining work volume. Accordingly, the revised work program is prepared for phase III and is given in Figure 15

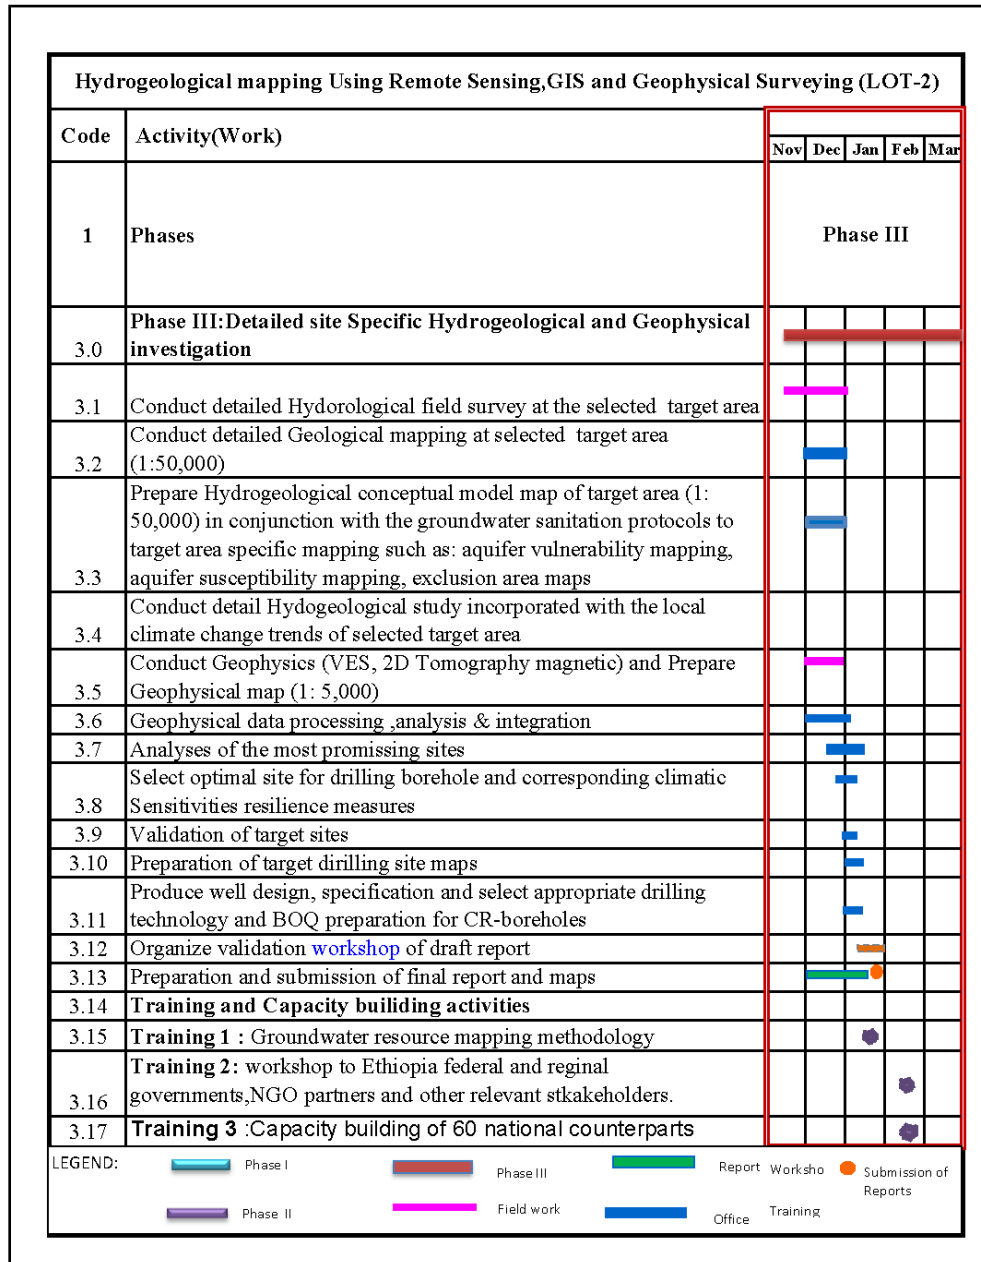


Figure 15: Revised Work Program for phase III work activities

## 6. Conclusion and Recommendation

The present study is an attempt to delineate the groundwater potential zones using RS, GIS, and MCDM techniques in Wuchale wereda, which are located in Oromia regional states. A total of five thematic layers such as Lithologic units, Lineament density, Lineament proximity, TWI, and Recharge were used in this study to delineate the groundwater potential zones. Different steps chosen for the study include the development of the thematic layers followed by GIS-based Multi-Criteria evaluation based on saaty's analytical hierarchy process (AHP) is used to compute weights for the thematic layers, the ranks from 1 to 5 allocated for each thematic layer which indicates very low, low, medium, high and very high in ascending order, associated with each class, were selected based on the influence of each factor on the groundwater potential, weighted overlay analyses for the demarcation of GWP zones, sensitivity analyses to understand effect weight of each thematic layer and validation of GWP zone by using well data and conceptual understanding of Wuchale wereda.

The spatial distribution of the Wuchale Wereda GWP zones generally matches with the conceptual understanding of the Wuchale Wereda and well data during model validation. The good agreement of GWP map validation and well data indicate litho–structural control on groundwater recharge and movement process and factors affecting groundwater recharge were carefully analyzed during the development of thematic layers. Based on the result of sensitivity analysis, the effective weights for each thematic layer show some deviation from empirical weights. The GWP map produced will be used to quickly identify the prospective GWP zones for conducting site-specific investigations.

This study generally demonstrates that GIS and remote sensing techniques coupled with field data can be used for mapping GWP zones, thereby narrowing down the target areas. Then, by conducting a detailed hydrogeological and geophysical survey at phase III, the most appropriate and optional sites will be selected for drilling.

It recommended that this study must be supported by detailed Hydrogeological, Geophysical, and test well drilling to more understand the groundwater system of the Wuchale Wereda.

## 7. REFERENCE

- Abdelsalam, M.G., Stern, R.J., 1996. Sutures and shear zones in the Arabian-Nubian Shield. *Journal African Earth Sciences* 23, 289-310.
- Abebe, T., Mazzarini, F., Innocenti, F., and Manetti, P. 1998. The Yerer-Tullu Wollel Volcano-tectonic Lineament: a transtensional structure in central Ethiopia and the associated magmatic activity. *Journal of African Earth Sciences*, 26, 135-150.
- Ampe, E.M.; Vanhamel, I.; Salvatore, E.; Dams, J.; Bashir, I.; Demarchi, L.; Batelaan, O. Impact of urban land-cover classification on groundwater recharge uncertainty. *IEEE J. Sel. Top. Appl. Earth Obs. Remote Sens.* 2012, 5, 1859–1867.
- Assefa, G., 1991. Lithostratigraphy and environment of deposition of Late Triassic to Early Cretaceous sequences of the central part of Northwestern Plateau, Ethiopia. *N. Jb. Geol. Palaont. Abb.* 182, (3): 255-284.
- Ayehu, G.T.; Tadesse, T.; Gessesse, B.; Dinku, T. Validation of new satellite rainfall products over the Upper Blue Nile Basin, Ethiopia. *Atmos. Meas. Tech.* 2018, 11, 1921–1936.
- Ayele Almw Fenta & Addis Kifle & Tesfamichael Gebreyohannes & Gebrerufael Hailu (2015), Spatial analysis of groundwater potential using remote sensing and GIS-based multi-criteria evaluation in Raya Valley, northern Ethiopia
- Basavarajappa H.T, Dinakar s and Manjunatha M.C (2016), Validation of derived groundwater potential zones (GWPZ) using geo-informatics and actual yield from well points in parts of upper Cauvery basin of Mysuru and Chamarajanagara districts, Karnataka, India
- Bereket Fentaw and Leta Alemayehu, GSE (2017), Hydrogeological and Hydrochemical Maps of Addis Ababa sheet NC 37-10 Sheet
- Beyth, M., 1972. Paleozoic–Mesozoic sedimentary basin of Mekele Outlier, Northern Ethiopia. *The American Association of Petroleum Geologists Bulletin* 56, 2426–2439.
- Bonini, M., Corti, G., Innocenti, F., Manetti, P., Mazzarini, F., Abebe, T., Pecskey, Z., 2005.
- Central Statistical Agency (2013), Population Projection of Ethiopia for all Regions at wereda Level from 2014 – 2017.
- Central Statistical Agency (2013), Population Projection of Ethiopia for all Regions at wereda Level from 2014 – 2017.
- Charlotte MacAlister, Paul Pavelic, Callist Tindimugaya, Tenalem Ayenew, Mohamed Elhassan Ibrahim and Mohamed Abdel Meguid, (2012), Overview of groundwater in the Nile River Basin.
- Charlotte MacAlister, Paul Pavelic, Callist Tindimugaya, Tenalem Ayenew, Mohamed Elhassan Ibrahim and Mohamed Abdel Meguid, (2012), Overview of groundwater in the Nile River Basin.
- Corti, G., 2009. Continental rift evolution: from rift initiation to incipient break-up in the Main Ethiopian Rift, East Africa. *Earth Sci. Rev.* 96, 1–53.
- Ebinger, C., 2005. Continental breakup: the East African perspective. *Astron. Geophys.* 46, 2.16–2.21. Ebinger, C., Casey, M., 2001 Continental breakup in magmatic provinces: an Ethiopian example, *Geology* 29, 527– 530.
- Engida Zemedagegnehu, Yelma Sileshi, Albert Tuinhof (2007), Groundwater Resources in Lake Tana Sub Basin and Adjacent Areas rapid Assessment and Terms of Reference of Further Study; Federal Republic of Ethiopia/ World bank.



- Engida Zemedagegnehu, Yelma Sileshi, Albert Tuinhof (2007), Groundwater Resources in Lake Tana Sub Basin and Adjacent Areas rapid Assessment and Terms of Reference of Further Study; Federal Republic of Ethiopia/ World bank.
- FAO. (1998). Crop evapotranspiration-Guidelines for computing crop water requirements- Irrigation and drainage paper 56. Rome, Italy.
- Fedlu Hassen and Aschalew Gurmu, GSE (2017), Hydrogeological and Hydrochemical Maps of Debre Markos NC 37-6 Sheet
- Fedlu Hassen and Aschalew Gurmu, GSE (2017), Hydrogeological and Hydrochemical Maps of Debre Markos NC 37-6 Sheet
- Fedlu Hassen, Aschalew Gurmu, GSE (2012), Geological Survey of Ethiopia Integrated Groundwater Resource Assessment of Debre-Markos Sheet (NC 37–6)
- Fedlu Hassen, Aschalew Gurmu, GSE (2012), Geological Survey of Ethiopia Integrated Groundwater Resource Assessment of Debre-Markos Sheet (NC 37–6)
- Fedlu Hassen, Aschalew Gurmu, GSE (2012), Integrated Groundwater Resource Assessment of Debre-Markos Sheet (NC 37 – 6)
- Fedlu Hassen, Aschalew Gurmu, GSE (2012), Integrated Groundwater Resource Assessment of Debre-Markos Sheet (NC 37 – 6)
- Fenta, A.A.; Yasuda, H.; Shimizu, K.; Ibaraki, Y.; Haregeweyn, N.; Kawai, T.; Belay, A.S.; Sultan, D.; Ebabu, K. Evaluation of satellite rainfall estimates over the Lake Tana basin at the source region of the Blue Nile River. *Atmos. Res.* 2018, 212, 43–53.
- Gamachu, D. (1977). The aspect of Climate Change and Water Budget in Ethiopia. A Technical Monograph for Addis Ababa University. Addis Ababa, Ethiopia: Addis Ababa University Press.
- Gani, N.D.S., Gani, M., Abdelsalam, M.G., 2008. Blue Nile incision on the Ethiopian Plateau: pulsed plateau growth, Pliocene uplift, and hominin evolution. *GSA Today* 17, 4–11.
- Hallstein lie & Agust Gudmundsson (2002), the importance of hydraulic gradient, lineament trend, proximity to lineaments, and surface drainage pattern for the yield of groundwater wells on Askoy, West Norway.
- Hydro-geological Map of Debrebirhan Map Sheet NC37-11; compiled by Tsehay Amare, Thomas Agzew, Habtamu Yaze (GSE, 2016)
- Jiri Sima and Muhuddin Abdella (2018). Hydrogeological and Hydrochemical Maps of Maychew ND 37-15 Sheet
- Khalid Benjmel, Fouad Amraoui, Said Boutaleb, Mohammed Ouchchen, Amine Tahiri and Amine Touab, Mapping of Groundwater Potential Zones in Crystalline Terrain Using Remote Sensing, GIS Techniques, and Multicriteria Data Analysis (Case of the Ighrem Region, Western Anti-Atlas, Morocco).
- Kobayashi, S., Ota, Y., Harada, Y., Ebita, A., Moriya, M., Onoda, H., Onogi, K., Kamahori, H., Kobayashi, C., Endo, H., Miyaoka, K., and Takahashi, K., 2015. The jra-55 reanalysis, General specifications and basic characteristics. *Journal of the Meteorological Society of Japan. Ser. II*, 93(1), 5–48.
- Mahamat Ouchar Al-Djazouli . Karim Elmorabiti. Abdelmejid Rahimi Omayma Amellah. Omer Abdelrahim Mohammed Fadil (2020), Delineating of groundwater potential zones based on remote sensing, GIS and analytical hierarchical process: a case of Waddai, eastern Chad

- Maidment, R.I.; Grimes, D.I.F.; Allan, R.P.; Greatrex, H.; Rojas, O.; Leo, O. Evaluation of satellite-based and model re-analysis rainfall estimates for Uganda. *Meteorol. Appl.* 2013, 20, 308–317
- Mutreja, K.N. (1995) *Applied Hydrology*. Tata Mcgraw-Hill Publishing Company Limited, New Delhi.
- R. H. McCuen, 1998, *Hydrologic Analysis and design*, Department of Civil engineering University of Maryland, USA.
- R.K Linsley, L.H, (1983), *PAULHUS, Hydrology for Engineers*, McGraw-HILL
- Shaw E.M. (1994). *Hydrology in Practice*. Second Edition, Chapman and Hall, New York, USA
- Sima, Jiri et al. (2009): *Water Resources Management and Environmental Protection Studies of the Jemma River Basin for Improved Food Security*. ISBN 978-80-254-5021-5. AQUATEST a.s., Prague, Czech Rep.
- T. Alemayehu, 2006, *Groundwater Occurrence in Ethiopia*, Addis Ababa University, Ethiopia.
- T. Grabs, J. Seibert, K. Bishop, H. Laudon, (2009) *Modeling spatial patterns of saturated areas: A comparison of the topographic wetness index and a dynamic distributed model*.
- T.Azagegn et al, A.Asrat et al,T.Ayenew et al ,S.Kebede et al : *Litho-structural control on interbasin groundwater transfer in central Ethiopia*. *Journal of African Earth Science*, Volume 101, January 2015, pages 383-395
- Tesfaye, Chernet (1993): *Hydrogeology of Ethiopia and Water Resources Development – MS EIGS*, Ministry of Mines and energy, Addis Ababa (Library 880-051-17).
- Thomas Agezew and Tsehay Amare, GSE (2018), *Hydrogeological and Hydrochemical Maps of Debre Birhan sheet NC 37-11 Sheet*
- Tilahun, Azagegn, Tafere (2008): *Hydrogeochemical Characterization of Aquifer Systems in upper Awash and Adjacent Abay Plateau using Geochemical Modeling and Isotope Hydrology*. Addis Ababa University, School of Graduate Studies, Department of Earth Sciences.
- Tilahun, Azagegn, Tafere (2014): *Groundwater Dynamics in the Left Bank Catchments of the Middle Blue Nile and the Upper Awash River Basins, Central Ethiopia*
- Ven Te Chow, David R. Maidment and Larry W. Mays, 1988, *Applied Hydrology*, McGraw-HILL International Editions for Civil Engineering Series.
- WMO-NO 168, *Guide to hydrological practice, Data Acquisition and processing, Analysis, Forecasting, and other applications*. Fifth edition, 1994.
- WWDE (2008): *Evaluation of water resources of Adaa and Becho plains groundwater resource for irrigation*. Addis Ababa, Ethiopia.
- WWDSE (2006): *Evaluation of water resources of the Ada'a and Becho plains groundwater basin for the irrigation development project*, April 2006, Water Works Design and Supervision Enterprise.
- Yates D. (1994), *WatBal- An Integrated Water Balance Model for Climate Impact Assessment of River Basin Runoff* IIASA Working Paper WP-94-064,
- Zelalem L, Melkamu M., Getnet T., Alebachew T., Mulugeta Ch., Minyahl T.(2019) *Appraising groundwater potential zones using geospatial and multi-criteria decision analysis (MCDA) techniques in Andasa-Tul watershed, Upper Blue Nile basin, Ethiopia*

## Annex 1: Observation during groundwater truthing and validation

### Wuchale Wereda

No.	Region	Wereda	Locality	UTM E	UTM N	Characteristic of validation point
1	Oromia	Wuchale Wereda	Tulu Gerbicho	509685	1078701	<ul style="list-style-type: none"> <li>The observation point is plain land with moderate groundwater recharge and Runoff potential.</li> <li>One well is observed with discharge of 8l/s.</li> <li>Alluvial aquifer with moderate to high groundwater potential is observed lithological unit in this area.</li> <li>The area is mapped as high groundwater potential zone.</li> <li>The groundwater potential map show there is good agreement between the well discharge and groundwater potential map.</li> </ul>
2			Burka Dandi	495822	1064653	<ul style="list-style-type: none"> <li>The observation point is plain land with moderate groundwater recharge and Runoff potential.</li> <li>One well is observed with discharge of 13 l/s.</li> <li>Aiba basalt is lithological unit observed in this area.</li> <li>The area is mapped as high groundwater potential zone which highly agree with the well discharge observed in this zone.</li> </ul>
3			Halko	473683	1062937	<ul style="list-style-type: none"> <li>The observation point is plain land with moderate groundwater recharge and Runoff potential.</li> <li>Two well is observed with discharge of 5 &amp; 7 l/s.</li> <li>Alluvial aquifer is lithological unit observed in this area.</li> <li>The area is mapped as moderate to high groundwater potential zone which highly agree with the well discharge observed in this zone.</li> </ul>
4			Sadan	487195	1056852	<ul style="list-style-type: none"> <li>The observation point is plain land with moderate groundwater recharge and Runoff potential.</li> <li>One well is observed with discharge of 3.06 l/s.</li> <li>Aiba basalt is lithological unit observed in this area.</li> <li>The area is mapped as moderate groundwater potential zone which highly agree with the well discharge observed in this zone.</li> </ul>

## Annex 2: Water point inventory data

### Wuchale Wereda

SN	UTME	UTMN	ELEV, M	Site_Name	Region	Wereda	Well_Type	Depth	SWL	DWL	DD	Q	K	T
1	478591	1052002	2648	"	Oromia	Wuchale	HDW							
2	478710	1052129	2645	:	Oromia	Wuchale	Rope pump							
3	490738	1057102	2675	abdi	Oromia	Wuchale	HDW		4					
4	489426	1058497	2649	allamosh	Oromia	Wuchale	BH							
5	480599	1057725	2656	babochi	Oromia	Wuchale	HDW							
6	501966	1069103	2571	bidaru	Oromia	Wuchale	spring							
7	488100	1057648	2663	boko fi tigiri	Oromia	Wuchale	HDW		3					
8	492711	1055214	2669	buko	Oromia	Wuchale	HDW							
9	492957	1054962	2674	buko 2	Oromia	Wuchale	HDW							
10	490846	1056970	2674	buko tigiri 2	Oromia	Wuchale	HDW		2					
11	495822	1064653	2600	burka dadi	Oromia	Wuchale	BH					13		
12	494577	1050294	2664	dabibo	Oromia	Wuchale	BH							
13	494414	1049979	2654	denbibo	Oromia	Wuchale	spring							
14	492953	1060333	2639	gabaa roobii	Oromia	Wuchale	BH		9.5		27.65	6.67		2.80E-04

SN	UTME	UTMN	ELEV, M	Site_Name	Region	Wereda	Well_Type	Depth	SWL	DWL	DD	Q	K	T
15	498696	1066985	2539	galmo gora	Oromia	Wuchale	HDW							
16	497432	1050221	2709	gordoma	Oromia	Wuchale	BH							
17	495226	1050565	2671	gordoma	Oromia	Wuchale	HDW							
18	488097	1057647	2660	gudo	Oromia	Wuchale	HDW							
19	473201	1062406	2649	gumbichu	Oromia	Wuchale	BH		35	54		5		
20	474628	1061809	2656	halko	Oromia	Wuchale	HDW							
21	473683	1062937	2658	halko	Oromia	Wuchale	BH		35	98		7		
22	478162	1059062	2643	harcho	Oromia	Wuchale	HDW							
23	473507	1062878	2649	harkiso	Oromia	Wuchale	HDW							
24	502227	1068467	2559	heto	Oromia	Wuchale	BH							
25	491441	1059369	2672	ijaara fi qarsaa	Oromia	Wuchale	HDW		10					
26	491449	1055297	2663	ilala	Oromia	Wuchale	BH		34					
27	486950	1056672	2631	jamaica	Oromia	Wuchale	HDW		5					
28	486901	1056672	2633	jamaica 2	Oromia	Wuchale	HDW							
29	487104	1048881	2606	jatani 2	Oromia	Wuchale	BH		3	28.6		9.5		
30	477471	1059284	2650	kata koshommi	Oromia	Wuchale	BH							
31	495802	1050054	2676	kombu	Oromia	Wuchale	HDW							
32	503607	1071796	2576	kowit	Oromia	Wuchale	BH		55	78		7		
33	478632	1051830	2645	koyit	Oromia	Wuchale	Rope pump							
34	503055	1071415	2588	koyit 1	Oromia	Wuchale	BH							
35	502497	1071010	2596	KOYIT 2	Oromia	Wuchale	BH							
36	493215	1051415	2663	Likime	Oromia	Wuchale	BH	90	5.7	57.89		90		165
37	478804	1057533	2656	machallaa	Oromia	Wuchale	HDW							
38	475816	1051624	2640	madera	Oromia	Wuchale	HDW							
39	496829	1049948	2687	meta	Oromia	Wuchale	HDW							
40	494250	1053436	2665	oborra gama	Oromia	Wuchale	BH							
41	494828	1051320	2665	odee	Oromia	Wuchale	BH							
42	487195	1056852		sadan well 2	Oromia	Wuchale	sw	21				3.06		
43	475437	1059973	2644	sadeqo(boshi)	Oromia	Wuchale	HDW							
44	492072	1055372	2675	siso likime	Oromia	Wuchale	HDW		2					
45	509685	1078701	2580	tulu gerbicho	Oromia	Wuchale	BH		82.95			8		7.85*10-3
46	485608	1056759	2663	wasarbi	Oromia	Wuchale	BH		13.8			6		

Annex 3: Geologic map and cross section of Wuchale Wereda

